

T-1 (3mm) RIGHT ANGLE LED INDICATOR

Part Number: WP934TV/4LID

High Efficiency Red


Features

- Pre-trimmed leads for pc mounting.
- Black case enhances contrast ratio.
- Wide viewing angle.
- High reliability life measured in years.
- Housing UL rating:94V-0.
- Housing material: type 66 nylon.
- Low current IF=2mA operating.
- RoHS compliant.

Description

The High Efficiency Red source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Orange Light Emitting Diode.

Package Dimensions

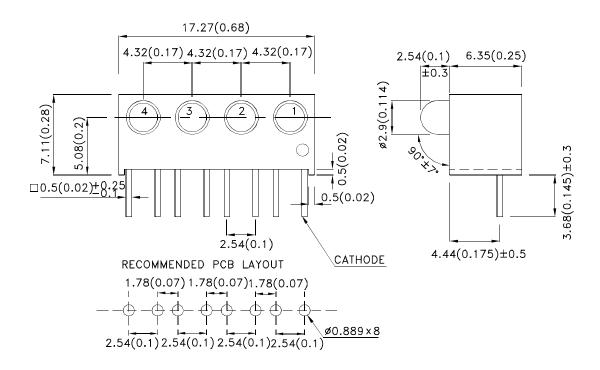

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is ±0.25(0.01") unless otherwise noted.
- Lead spacing is measured where the leads emerge from the package.
 The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.

SPEC NO: DSAI3225 **REV NO: V.2A DATE: APR/08/2016** PAGE: 1 OF 5 **APPROVED: Wynec CHECKED: Allen Liu** DRAWN: L.T.Zhang ERP: 1102015747



Selection Guide

Part No.	Emitting Color (Material)	Lens Type	lv (mcd) [2] @ 2mA		Viewing Angle [1]
			Min.	Тур.	201/2
M/DO24TV//4LID	High Efficiency Red (GaAsP/GaP)	Dod Diffused	0.35	1	40°
WP934TV/4LID		Red Diffused	*0.2	*0.6	

Notes:

- $1. \theta 1/2$ is the angle from optical centerline where the luminous intensity is 1/2 of the optical peak value.
- 2. Luminous intensity / luminous Flux: +/-15%.

 * Luminous intensity value is traceable to CIE127-2007 standards.

Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Emitting Color	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	High Efficiency Red	627		nm	IF=2mA
λD [1]	Dominant Wavelength	High Efficiency Red	625		nm	IF=2mA
Δλ1/2	Spectral Line Half-width	High Efficiency Red	45		nm	IF=2mA
С	Capacitance	High Efficiency Red	15		pF	VF=0V;f=1MHz
VF [2]	Forward Voltage	High Efficiency Red	1.7	2.5	V	IF=2mA
lr	Reverse Current	High Efficiency Red		10	uA	V _R = 5V

Notes:

- Wavelength: +/-1nm.
 Forward Voltage: +/-0.1V.
- 3. Wavelength value is traceable to CIE127-2007 standards.
- 4. Excess driving current and / or operating temperature higher than recommended conditions may result in severe light degradation or premature failure.


Absolute Maximum Ratings at TA=25°C

Parameter	Values	Units		
Power dissipation	75	mW		
DC Forward Current	30	mA		
Peak Forward Current [1]	160	mA		
Reverse Voltage	5	V		
Operating/Storage Temperature	-40°C To +85°C	-40°C To +85°C		
Lead Solder Temperature [2]	260°C For 3 Seconds	260°C For 3 Seconds		
Lead Solder Temperature [3]	260°C For 5 Seconds	260°C For 5 Seconds		

- 1. 1/10 Duty Cycle, 0.1ms Pulse Width.
 2. 2mm below package base.
- 3. 5mm below package base.
- Relative humidity levels maintained between 40% and 60% in production area are recommended to avoid the build-up of static electricity Ref JEDEC/JESD625-A and JEDEC/J-STD-033.


SPEC NO: DSAI3225 **REV NO: V.2A DATE: APR/08/2016** PAGE: 2 OF 5 APPROVED: Wynec **CHECKED: Allen Liu** DRAWN: L.T.Zhang ERP: 1102015747


Kingbright

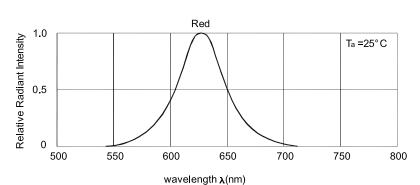



Relative Intensity Vs. Wavelength


High Efficiency Red WP934TV/4LID












SPATIAL DISTRIBUTION

SPEC NO: DSAI3225 REV NO: V.2A DATE: APR/08/2016 PAGE: 3 OF 5
APPROVED: Wynec CHECKED: Allen Liu DRAWN: L.T.Zhang ERP: 1102015747

Kingbright

PACKING & LABEL SPECIFICATIONS WP934TV/4LID 28PCS / IC TUBE 28OPCS / 10PCS IC TUBE Kingbright 4.2K / BOX



OUTSIDE LABEL

Terms and conditions for the usage of this document


- 1. The information included in this document reflects representative usage scenarios and is intended for technical reference only.
- 2. The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.
- 3. When using the products referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If customer usage exceeds the specified limits, Kingbright will not be responsible for any subsequent issues.
- 4. The information in this document applies to typical usage in consumer electronics applications. If customer's application has special reliability requirements or have life-threatening liabilities, such as automotive or medical usage, please consult with Kingbright representative for further assistance.
- 5. The contents and information of this document may not be reproduced or re-transmitted without permission by Kingbright.
- 6. All design applications should refer to Kingbright application notes available at http://www.KingbrightUSA.com/ApplicationNotes

SPEC NO: DSAl3225 REV NO: V.2A DATE: APR/08/2016 PAGE: 4 OF 5
APPROVED: Wynec CHECKED: Allen Liu DRAWN: L.T.Zhang ERP: 1102015747

Kingbright

PRECAUTIONS


- 1. Storage conditions:
 - a. Avoid continued exposure to the condensing moisture environment and keep the product away from rapid transitions in ambient temperature.
 - b.LEDs should be stored with temperature ≦30°C and relative humidity < 60%.
 - c.Product in the original sealed package is recommended to be assembled within 72 hours of opening. Product in opened package for more than a week should be baked for 30 (\pm 10/-0) hours at 85 ~ 100°C.
- 2. The lead pitch of the LED must match the pitch of the mounting holes on the PCB during component placement. Lead-forming may be required to insure the lead pitch matches the hole pitch. Refer to the figure below for proper lead forming procedures. (Fig. 1)

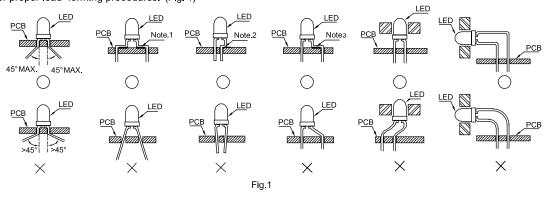

"O" Correct mounting method "X" Incorrect mounting method

Note 1-3: Do not route PCB trace in the contact area between the leadframe and the PCB to prevent short-circuits.

3. When soldering wires to the LED, each wire joint should be separately insulated with heat-shrink tube to prevent short-circuit contact. Do not bundle both wires in one heat shrink tube to avoid pinching the LED leads. Pinching stress on the LED leads may damage the internal structures and cause failure. (Fig. 2)

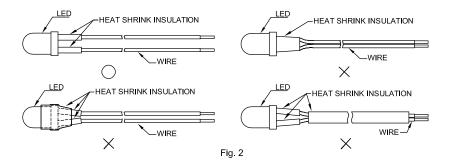

4. Use stand-offs (Fig.3) or spacers (Fig.4) to securely position the LED above the PCB.



- 5. Maintain a minimum of 3mm clearance between the base of the LED lens and the first lead bend. (Fig. 5 and 6)
- 6. During lead forming, use tools or jigs to hold the leads securely so that the bending force will not be transmitted to the LED lens and its internal structures. Do not perform lead forming once the component has been mounted onto the PCB. (Fig. 7)

 SPEC NO: DSAl3225
 REV NO: V.2A
 DATE: APR/08/2016
 PAGE: 5 OF 5

 APPROVED: Wynec
 CHECKED: Allen Liu
 DRAWN: L.T.Zhang
 ERP: 1102015747

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LED Circuit Board Indicators category:

Click to view products by Kingbright manufacturer:

Other Similar products are found below:

568-0701-841F LTL-4221NH129 LTL-42DGNMHDP1 HLMP1521101 HLMP1523802F HLMP1700101F HLMP1700104F BHA-1564-G SMF-HM1530YD-305 SSF-LXH409SYSUGW AM2520EHSGD HLMP1301104F HLMP1385101F HLMP1421101 HLMP1503103F HLMP1503104F HLMP1700102F HLMP1700106F HLMP1700107F HLMP1790101F HLMP1790103F LTL-4211NHBP 5390H3 551-2802F 552-0794-810F 553-0222-812F HT3-BC-T 564-0700-831F WP59BLGEW 103-3101-1231-403 5502407811F 550-3007-810F 551-3307MF 552080-1 573-2399-100F 592-2020-302F 5932-927-2701-3F SMF-HM1530SRD-509 SSF-LXH100MID SSF-LXH2103SRSRDRP SSF-LXH555USBW WP937SB/4YGW WP937EB2EGW HT3-BLU-T 551-0312-802F 553-0110-802F 561-5501-050F 6202T3-5VLC MV60538MP7 LTL-307G08A-D