


## PRODUCT DIMENSION

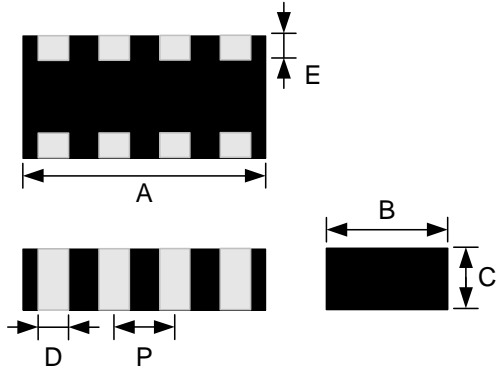


NOTE : Dimensions in mm

PRODUCT NO.	A	B	C	D	E	P
MLB-3216	3.2±0.2 (0.126±0.008)	1.6±0.2 (0.063±0.008)	0.9±0.2 (0.035±0.008)	0.4±0.2 (0.015±0.008)	0.3±0.2 (0.012±0.008)	0.8±0.1 (0.031±0.004)

## CURRENT DERATING

In operating temperatures exceeding +85°C, derating of current is necessary for chip ferrite beads for which rated current is 1.5A or over. Please apply the derating curve shown below according to the operating temperature.

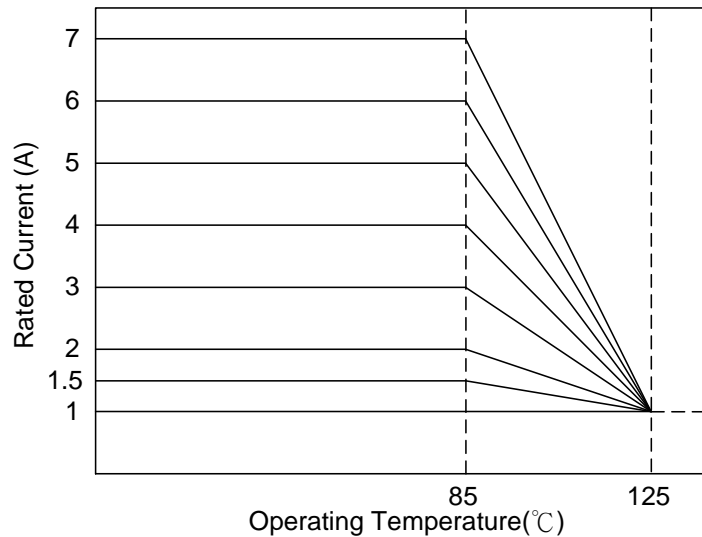

## ELECTRICAL REQUIREMENTS

Part Number	Impedance ( $\Omega$ ) at 100 MHz	R <sub>DC</sub> ( $\Omega$ ) Max.	Rated Current (mA) Max.	Operating Temp. Range ( $^{\circ}\text{C}$ )
MLB-3216-0030M4-N2	30 $\pm$ 25%	0.4	350	-55 ~ +125
MLB-3216-0060M4-N2	60 $\pm$ 25%		250	
MLB-3216-0120M4-N2	120 $\pm$ 25%	0.8	150	
MLB-3216-0240M4-N2	240 $\pm$ 25%			
MLB-3216-0300M4-N2	300 $\pm$ 25%			
MLB-3216-0470M4-N2	470 $\pm$ 25%	1.0		
MLB-3216-0600M4-N2	600 $\pm$ 25%	1.5	100	
MLB-3216-1000M4-N2	1000 $\pm$ 25%	1.7	50	

- Temperature rise should be less than 40 $^{\circ}\text{C}$  for P-type and less than 25 $^{\circ}\text{C}$  for other types when rated current is applied.

## MEASURING METHOD / CONDITION

- Test Instrument:

Z: Agilent 4291B Impedance Analyzer, Test Fixture: Agilent 16192  
Osc. Level: 500mV

R<sub>DC</sub>: Agilent 34401A

- Test Condition:


< Unless otherwise specified >

Temperature: 15 $^{\circ}\text{C}$  to 35 $^{\circ}\text{C}$     Humidity: 25% to 85% RH

< In case of doubt >

Temperature: 25 $^{\circ}\text{C} \pm 2^{\circ}\text{C}$     Humidity: 60% to 70% RH

# TYPICAL ELECTRICAL CHARACTERISTICS (T=25°C)

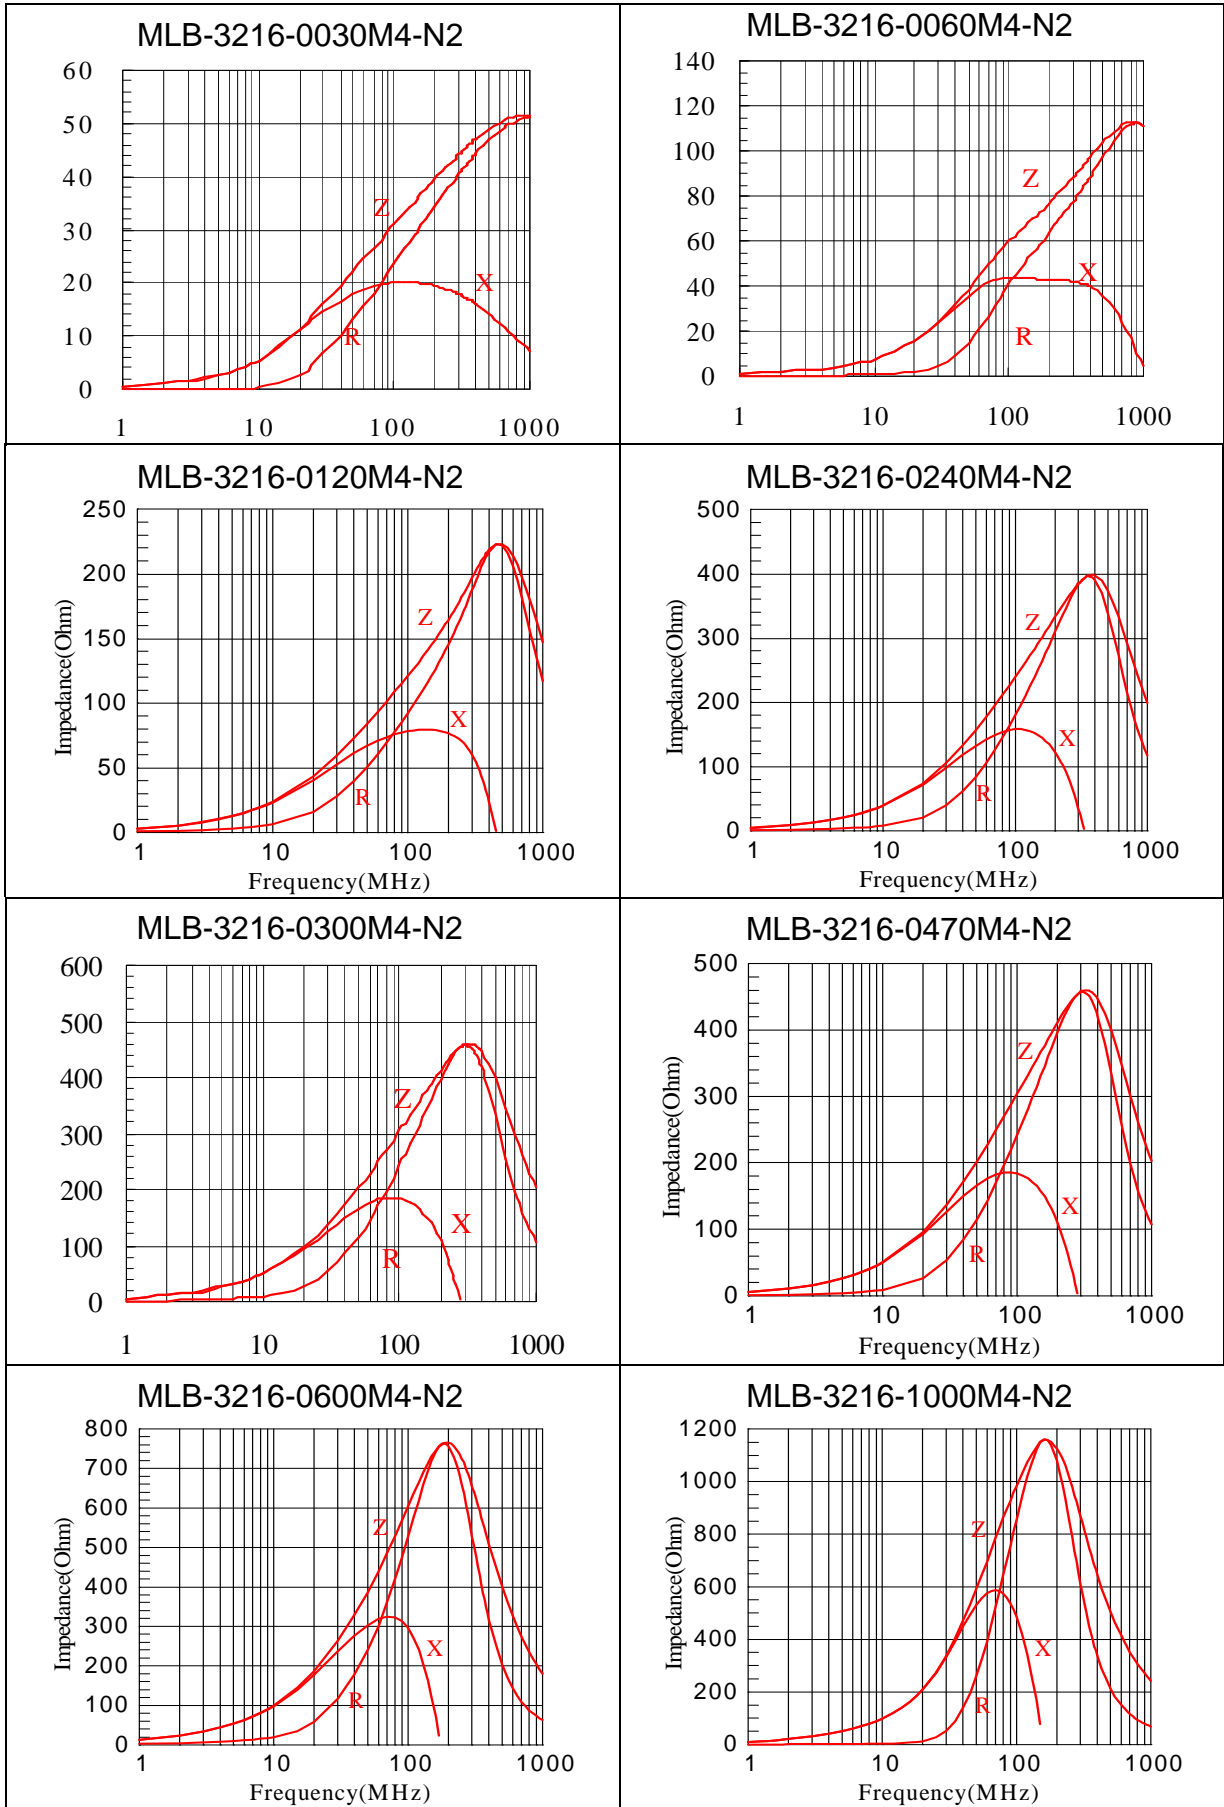

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [mec switches](#) manufacturer:*

Other Similar products are found below :

[95NA3509](#) [1R001](#) [1B00](#) [1630004](#) [1D27F1500](#) [1SS06-08.0](#) [1A02](#) [4FTH901](#) [2SS09-07.0](#) [1ZCS53](#) [025773H](#) [5GTH9208222](#) [1DS11](#)  
[5GSH96501](#) [1TS03](#) [1US00](#) [1D06](#) [5GTH96561](#) [2A03](#) [MSFC-10KEX](#) [099196G](#) [429981B](#) [1ZW09](#) [1IS16-12.0](#) [10C1616LMH11809](#) [1ZB09](#)  
[1Z09](#) [1ZCS30](#) [1630008](#) [1670003](#) [1SS02-09.5](#) [5GSH92022](#) [5GSH96522](#) [1SS06-12.0](#) [1US03](#) [1Q001](#) [5GTH9202242](#) [1D30](#) [1D04](#) [AQN-2.5](#)  
[1A09XU134](#) [5GSH920Q](#) [1632609](#) [XO-08-7.37280MHZ](#) [099349E](#) [2D032](#) [4FSH961](#) [1630000](#) [1ZB57](#) [15452](#)