T-1(3mm) BI-COLOR INDICATOR LAMP

Part Number: WP93WEGW

High Efficiency Red Green

Features


- Uniform light output.
- Low power consumption.
- 3 leads with one common lead.
- Long life solid state reliability.
- RoHS compliant.

Description

The High Efficiency Red source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Orange Light Emitting Diode.

The Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

Package Dimensions

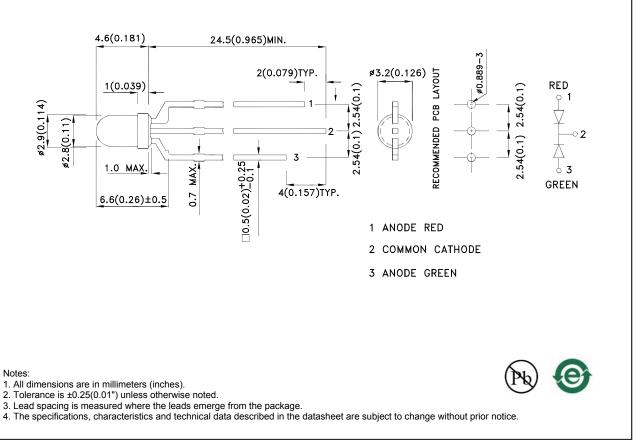

SPEC NO: DSAF6030 APPROVED: WYNEC REV NO: V.4A CHECKED: Allen Liu DATE: AUG/31/2013 DRAWN: Y.Liu PAGE: 1 OF 7 ERP: 1101008771

Part No.	Dice	Lens Type	lv (mcd) [2] @ 20mA		Viewing Angle [1]
			Min.	Тур.	201/2
WP93WEGW	High Efficiency Red (GaAsP/GaP)	White Diffused	20	50	60°
			*12	*30	
	Green (GaP)		20	40	
			*20	*40	

Notes:

1. 01/2 is the angle from optical centerline where the luminous intensity is 1/2 of the optical peak value.
Luminous intensity/ luminous Flux: +/-15%.
*Luminous intensity value is traceable to the CIE127-2007 compliant national standards.

Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions	
λpeak	Peak Wavelength	High Efficiency Red Green	627 565		nm	I⊧=20mA	
λD [1]	Dominant Wavelength	High Efficiency Red Green	617 568		nm	I⊧=20mA	
Δλ1/2	Spectral Line Half-width	High Efficiency Red Green	45 30		nm	I⊧=20mA	
С	Capacitance	High Efficiency Red Green	15 15		pF	VF=0V;f=1MHz	
VF [2]	Forward Voltage	High Efficiency Red Green	2 2.2	2.5 2.5	V	IF=20mA	
lr	Reverse Current	High Efficiency Red Green		10 10	uA	VR = 5V	


Notes:

1.Wavelength: +/-1nm. 2. Forward Voltage: +/-0.1V. 3.Wavelength value is traceable to the CIE127-2007 compliant national standards.


Absolute Maximum Ratings at TA=25°C


Parameter	High Efficiency Red	Green	Units		
Power dissipation	75	62.5	mW		
DC Forward Current	30	25	mA		
Peak Forward Current [1]	160	140	mA		
Reverse Voltage		V			
Operating / Storage Temperature	-40°C To +85°C				
Lead Solder Temperature [2]	260°C For 3 Seconds				
Lead Solder Temperature [3]	260°C For 5 Seconds				
Notes:					

1. 1/10 Duty Cycle, 0.1ms Pulse Width.
2. 2mm below package base.
3. 5mm below package base.

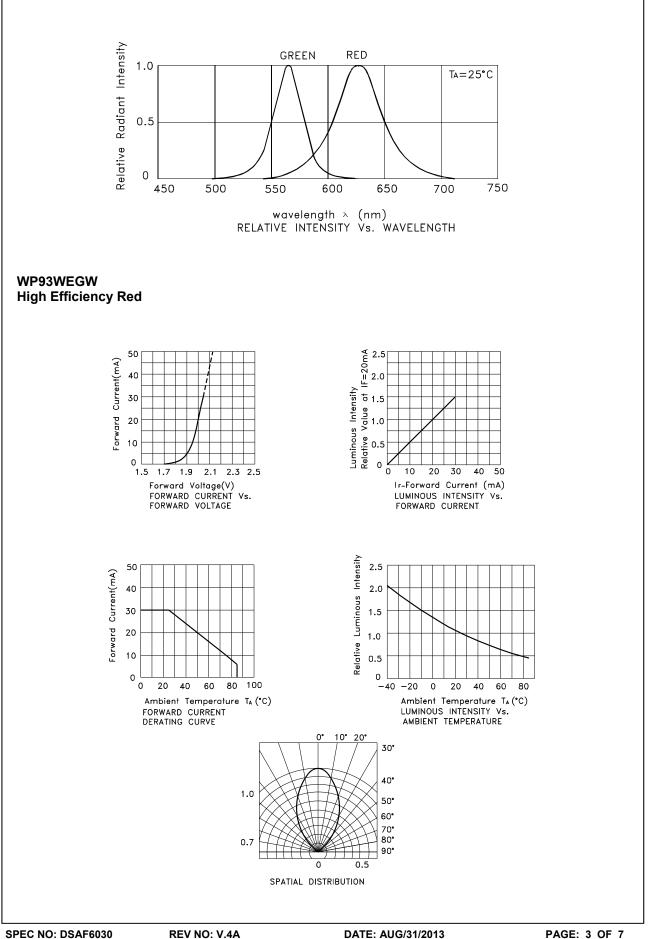

Green

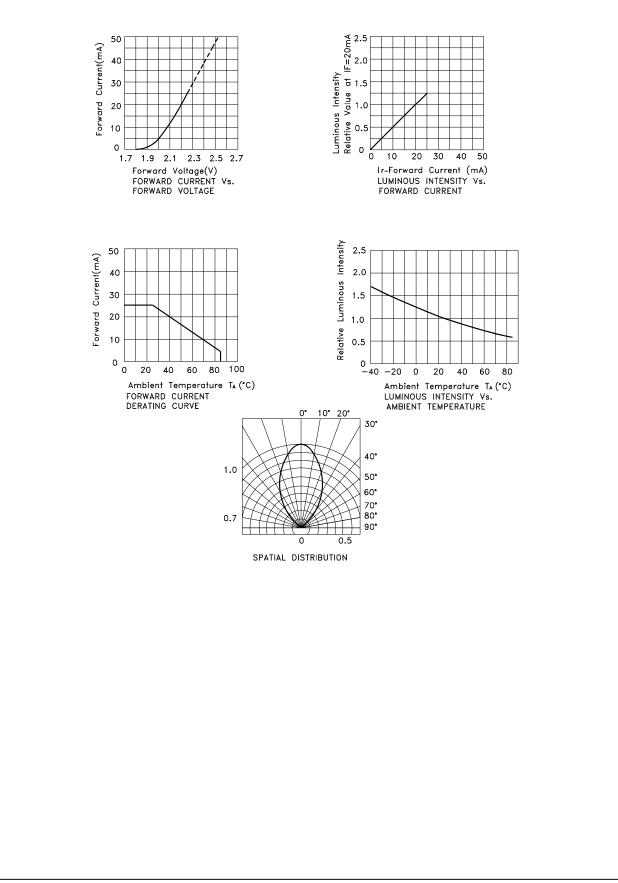

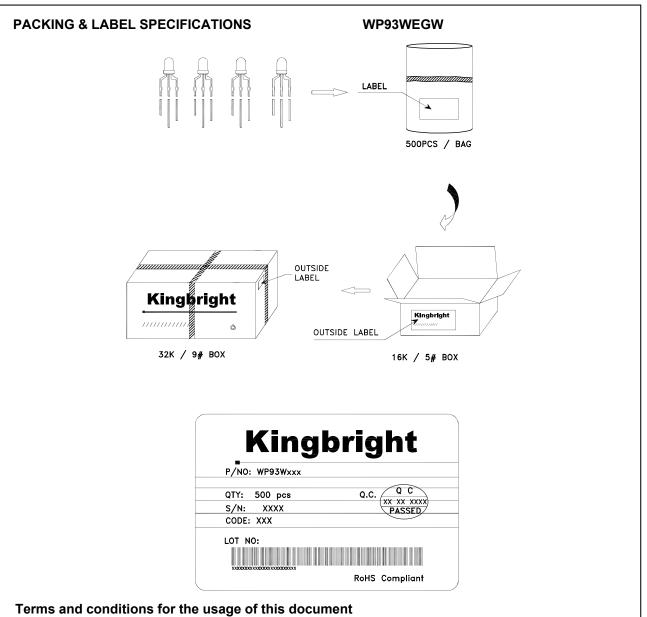


- 1. The information included in this document reflects representative usage scenarios and is intended for technical reference only.
- 2. The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.
- 3. When using the products referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If customer usage exceeds the specified limits, Kingbright will not be responsible for any subsequent issues.
- 4. The information in this document applies to typical usage in consumer electronics applications. If customer's application has special reliability requirements or have life-threatening liabilities, such as automotive or medical usage, please consult with Kingbright representative for further assistance.
- 5. The contents and information of this document may not be reproduced or re-transmitted without permission by Kingbright.

6.All design applications should refer to Kingbright application notes available at http://www.KingbrightUSA.com/ApplicationNotes


PRECAUTIONS

1. The lead pitch of the LED must match the pitch of the mounting holes on the PCB during component placement. Lead-forming may be required to insure the lead pitch matches the hole pitch. Refer to the figure below for proper lead forming procedures. (Fig. 1)

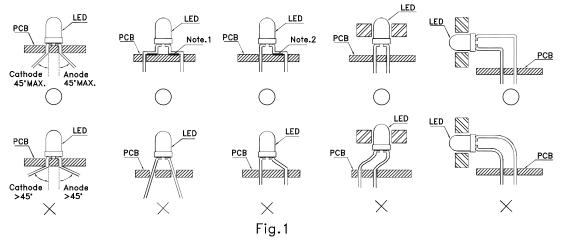


 \bigcirc " Correct mounting method "imes" Incorrect mounting method

- When soldering wire to the LED, use individual heat-shrink tubing to insulate the exposed leads to prevent accidental contact short-circuit. (Fig.2)
- 3. Use stand-offs (Fig.3) or spacers (Fig.4) to securely position the LED above the PCB.



- 4. Maintain a minimum of 3mm clearance between the base of the LED lens and the first lead bend. (Fig. 5 and 6)
- 5. During lead forming, use tools or jigs to hold the leads securely so that the bending force will not be transmitted to the LED lens and its internal structures. Do not perform lead forming once the component has been mounted onto the PCB. (Fig. 7)

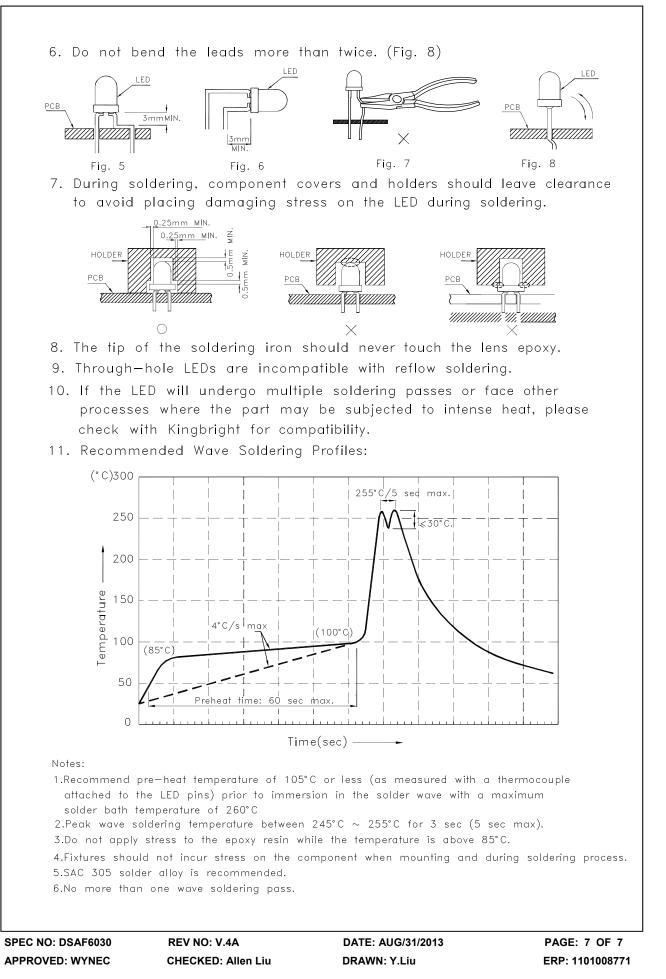

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Standard LEDs - Through Hole category:

Click to view products by Kingbright manufacturer:

Other Similar products are found below :

LTL-10254W LTL-1214A LTL-2231AT LTL-3251A LTL-4262N LTL-433P LTL-5234 LTL87HTBK LTW-87HD4B HLMP-EL30-PS0DD 1L0532V23G0TD001 NSPW500CS NTE30036 NTE30044 NTE30059 NTE3020 LD CQDP-1U3U-W5-1-K LP379PPG1C0G0300001 SLR-342MC3F SLX-LX3044GD SLX-LX3044ID SLX-LX3044YD 1.90690.3330000 SSS-LX4673ID-410B 1L0532Y24I0TD001 264-7SYGD/S530-E2 HLMP-1301-G00FG HLMP1385 LTL-10224W LTL-1224A LTL-1234A LTL-2251AT LTL-403HR LTL-4222 LU7-E-B 4380H1 HLMP-3962-F0002 HLMP-GG15-R0000 323-2SURD/S530-A3 L53SRC/E-Z L-7679C1ZGC 4302T1-5V 4306D23 4363D1/5 WP1503SRC/J4 WP153GDT WP153YDT WP1543SGC WP1543SURC WP53MGD