

For In-Circuit- and Functional Test (ICT/FCT)


F585

Centers* 2,54 mm/100 mil

	Current	Temperature
Standard	3,0 A	-20°... +80° C
H-Version ¹	3,0 A	-40°... +250° C

¹ On Request

Can be combined with F703 (75 mil) and F788 or F767 (50 mil). For dual stage fixtures the long travel probe F588 is recommended. The receptacle H585 permits a variable projection height. It is also available with 500 mm preattached stranded wire (0,14 mm²). Order number H585LI. Delivery time on request.

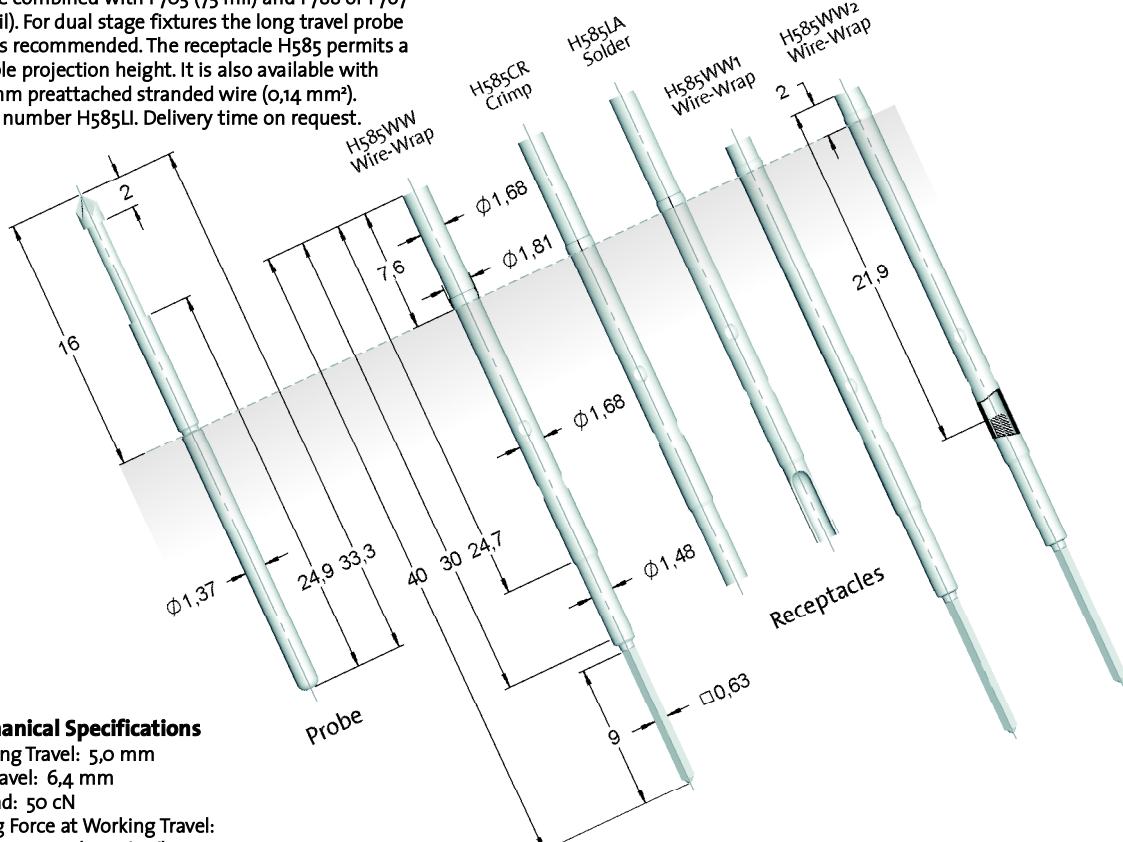

Mechanical Specifications

Working Travel: 5,0 mm
 Full Travel: 6,4 mm
 Preload: 50 cN
 Spring Force at Working Travel:
 130 cN ±20% (Standard)
 200 cN ±20% (Standard and H-Version)
 300 cN ±20% (Standard)
 450 cN ±20% (On Request)
 Mechanical Life 1,5 mill. cycles
 75 tsd. cycles (300 cN)
 50 tsd. cycles (450 cN)
 Pointing Accuracy: ±0,08 mm

Electrical Specifications

Constant Current: 3,0 A
 Typical Probe Resistance: 30 mOhm

Materials and Finishes

Plunger: see Tip Style
 Barrel: Nickel Silver, Gold plated
 Spring: Music Wire, Silver plated
 Receptacle: Nickel Silver, Gold plated

Order Example

F585 05B 150 G 200 H

Type: F585 Tip Diameter: 05B Spring Force: 150 Special Version: H

Tip Style: 05 Material: B Plunger Finish: G

Material: B = BeCu, S = Steel
Tip Diameter: 1,5 mm = 150
Plunger Finish: G = Gold plated, L = Longtime gold plated,
Special Version: H = High Temperature Probe, IK = Insulation Head
Receptacle: Order Number see drawing

Projection Height

H585WW/H585CR/H585LA	H585WW1	H585WW2
8,4 - 16,0 mm	8,4 - 10,4 mm	11,4 - 13,4 mm

Plunger Tip Style, Material, Finish and Tip Diameter

05 BeCu; G Ø 1,5 mm	06 BeCu; G Ø 1,3; 1,5 mm	06 BeCu; G (IK) Inside Ø 1,3; 1,5; Outside Ø 2,2;	06 BeCu; G (IK) 2,5; 3,5 mm 3,2; 4,0 mm	07 Steel; L Ø 1,5 mm
10 Steel; L Ø 0,63 mm	11 BeCu; G Ø 1,05 mm	12 BeCu; G Ø 1,5 mm	14 BeCu/Steel Ø 1,3; 1,5 mm, G Ø 1,3; 1,5 mm, L	15 BeCu; G Ø 1,5; 2,5 mm
18 BeCu/Steel Ø 1,05 mm, G Ø 1,05 mm, L	21 Steel; L Ø 1,05 mm	30 BeCu; G Ø 1,05 mm	33 Steel; L Ø 1,05 mm	35 Steel; L Ø 1,45 mm
36 BeCu/Steel Ø 1,37 mm, G Ø 1,37 mm, L	38 Steel; L Ø 1,05 mm	60 BeCu; G Ø 0,46 mm	63 BeCu; G Ø 1,5 mm	64 BeCu; G Ø 0,46 mm

* Centers depend on chosen tip diameter

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Plugs & Test Jacks](#) category:

Click to view products by [Feinmetall](#) manufacturer:

Other Similar products are found below :

[579-0400](#) [66000-7](#) [R644543000](#) [R921923000](#) [R921930000](#) [R941344000](#) [R948161000](#) [R999351000](#) [1408-4](#) [1533-1](#) [174-R825B-EX](#)
[NYS508-BU](#) [1680](#) [174-R819B-EX](#) [R644543003](#) [R644543020](#) [R644543021](#) [R921926000](#) [R921931000](#) [R921932000](#) [R921934000](#)
[R929991000](#) [R941460000](#) [R941461000](#) [R941463600](#) [R941920600](#) [R948160000](#) [31B-2-RED](#) [032-0016-023](#) [105-1106-001](#) [108-1000-106](#)
[108-2301-621](#) [111-0707-001](#) [66001-9](#) [7013](#) [1395080-1](#) [930166100](#) [NYS508-GR](#) [NYS508-W](#) [NYS508-Y](#) [NYS511-R](#) [BP30-2BR10-B PKG](#)
[BP30-10-WT](#) [BP30-2BR-B PKG](#) [BP30Y-1 PKG](#) [R941049000](#) [R941340000](#) [R948141029](#) [R644543022](#) [R948142000](#)