


**Circuit Configuration**



Dimensions mm (inches)

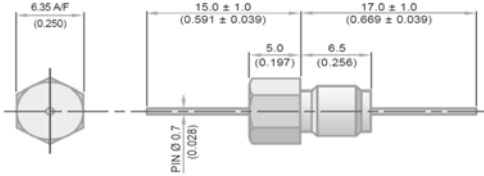

2BA Thread

Electrical Details	
Electrical Configuration	C Filter
Capacitance Measurement	@ 1000hr Point
Current Rating	10A
Insulation Resistance (IR)	10GΩ or 1000ΩF
Temperature Rating	-55°C to +125°C
Ferrite Inductance (Typical)	Not Applicable
Mechanical Details	
Head A/F	6.35mm (0.250")
Nut A/F	6.35mm (0.250")
Washer Diameter	9.1mm (0.358")
Mounting Torque	0.6Nm (5.31lbf in) max. if using nut 0.3Nm (2.65lbf in) max. into tapped hole
Mounting Hole Diameter	4.9mm ± 0.1 (0.193" ± 0.004")
Max. Panel Thickness	3.4mm (0.134")
Weight (Typical)	1.8g (0.06oz)
Finish	Silver plate on copper undercoat

Product Code	Hardware (Nuts & Washers etc.)	Capacitance ±20% UOS	Dielectric	Rated Voltage (dc)	DWV (dc)	Typical Insertion Loss (db)					
						0.01MHz	0.1MHz	1MHz	10MHz	100MHz	1GHz
*SFCIC5000100ZC	0 = No hardware supplied 1 = supplied with standard nut and wavy washer Other options available – please contact factory	10pF -20% / +80%	COG	500	750						4
SFCIC5000150ZC		15pF -20% / +80%	COG	500	750						7
SFCIC5000220ZC		22pF -20% / +80%	COG	500	750						10
SFCIC5000330ZC		33pF -20% / +80%	COG	500	750						12
*SFCIC5000470ZC		47pF -20% / +80%	COG	500	750						15
*SFCIC5000680MC		68pF	COG	500	750					1	18
*SFCIC5000101MC		100pF	COG	500	750					4	22
SFCIC5000151MC		150pF	COG	500	750					7	25
*SFCIC5000221MC		220pF	COG	500	750					10	29
*SFCIC5000331MC		330pF	COG	500	750					13	33
*SFCIC5000471MX		470pF	†X7R	500	750				1	16	35
SFCIC5000681MX		680pF	†X7R	500	750				2	19	36
*SFCIC5000102MX		1.0nF	X7R	500	750				4	23	41
SFCIC5000152MX		1.5nF	X7R	500	750				7	26	45
*SFCIC5000222MX		2.2nF	X7R	500	750				10	30	50
SFCIC5000332MX		3.3nF	X7R	500	750				13	33	52
*SFCIC5000472MX		4.7nF	X7R	500	750				1	16	36
SFCIC5000682MX		6.8nF	X7R	500	750				2	19	39
*SFCIC5000103MX		10nF	X7R	500	750				4	22	41
*SFCIC5000153MX		15nF	X7R	500	750				7	25	44
*SFCIC5000223MX		22nF	X7R	500	750				10	29	46
SFCIC5000333MX		33nF	X7R	500	750				13	33	48
*SFCIC5000473MX		47nF	X7R	500	750			1	16	35	50
SFCIC5000683MX		68nF	X7R	500	750			2	19	39	54
SFCIC5000104MX		100nF	X7R	500	750			4	22	41	57
SFCIC5000154MX		150nF	X7R	500	750			7	25	45	60
*SFCIC2000224MX		220nF	X7R	200	500			10	29	49	62
SFCIC1000334MX		330nF	X7R	100	250			13	33	52	66
*SFCIC1000474MX		470nF	X7R	100	250		1	16	35	55	68
SFCIC0500684MX		680nF	X7R	50	125		2	19	38	58	70

\* Recommended values

† Also available in COG

**Ordering Information**

Type	Case Style	Thread	Electrical configuration	Voltage (dc)	Capacitance in picofarads (pF)	Capacitance Tolerance	Dielectric	Hardware
SF	C	I	C	500	0102	M	X	O
Syfer Filter	6.35mm Hex Head	2BA	C = C Filter	050 = 50V 100 = 100V 200 = 200V 500 = 500V	First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is the number of zeros following. Examples: 0101 = 100pF 0332 = 3300pF	M = ±20% Z = -20+80%	C = COG/NPO X = X7R	0 = Without 1 = With

Note: The addition of a 4-digit numerical suffix code can be used to denote changes to the standard part.

Options include for example: change of pin length / custom body dimensions or threads / alternative voltage rating / non-standard intermediate capacitance values / test requirements.

Please refer specific requests to the factory.



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [EMI Feedthrough Filters](#) category:*

*Click to view products by [Knowles](#) manufacturer:*

Other Similar products are found below :

[FN7561-63-M6](#) [FN7611-63-M6](#) [FN7612-10-M3](#) [FN7660-100-M8](#) [1202F-054](#) [1609991-8](#) [1609992-2](#) [16DFC6-C](#) [16FFD6-HE](#) [2-1609992-2](#)  
[2443-007-X5S0-102MLF](#) [2443-007-X5W0-502ZLF](#) [1609990-8](#) [1609991-3](#) [1609992-1](#) [1609992-3](#) [1609993-1](#) [1609993-7](#) [200AFC6-P](#)  
[200DFC6-P](#) [FN7510-100-M8](#) [FN7510-32-M4](#) [FN7562-100-M8](#) [FN7562-200-M10](#) [FN7563-100-M8](#) [FN7611-10-M3](#) [FN7612-63-M6](#) [2450-](#)  
[001-X5U0-102PLF](#) [2499-003-X5S0-152MLF](#) [32AFC6-H](#) [4100-000LF](#) [4201-050LF](#) [4204-001LF](#) [4253-002LF](#) [4305-001LF](#) [4306-019LF](#)  
[4101-004LF](#) [4201-003LF](#) [4208-000LF](#) [4600-067](#) [094-6526-0000](#) [100AFC6-G](#) [10AFC6-B](#) [10DFC6-C](#) [1-1609990-3](#) [1-1609990-7](#) [1-](#)  
[1609992-8](#) [1-1609990-1](#) [1-1609991-1](#) [FN7510-16-M4](#)