**Electrical Details**

|                              |                 |
|------------------------------|-----------------|
| Electrical Configuration     | C Filter        |
| Capacitance Measurement      | @ 1000hr Point  |
| Current Rating               | 15A             |
| Insulation Resistance (IR)   | 10GΩ or 1000MΩ  |
| Temperature Rating           | -55°C to +125°C |
| Ferrite Inductance (Typical) | Not Applicable  |

**Mechanical Details**

|                        |   |
|------------------------|---|
| Head Diameter          | 9.8mm (0.386")                            |
| Nut A/F                | 8.0mm (0.315")                            |
| Washer Diameter        | 11.35mm (0.447")                          |
| Mounting Torque        | 0.9Nm (7.97lbf in) max.                   |
| Mounting Hole Diameter | 6.2mm (0.244") O.D.<br>5.3mm (0.208") A/F |
| Max. Panel Thickness   | 2.9mm (0.114")                            |
| Weight (Typical)       | 3.0g (0.11oz)                             |
| Finish                 | Silver plate on copper undercoat          |

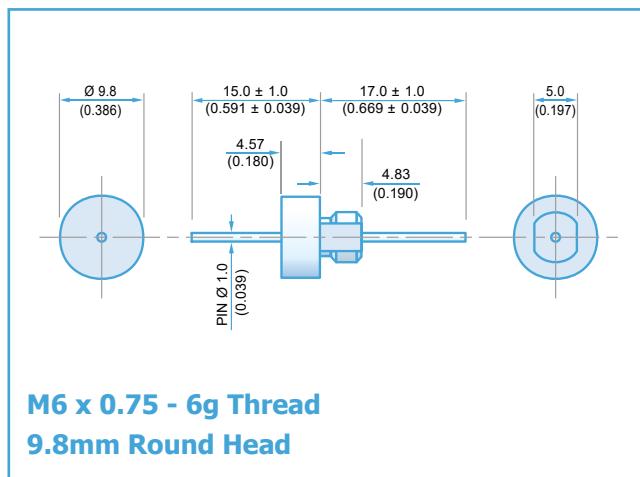
| Product Code     | Capacitance<br>(±20%) | Dielectric | Rated Voltage<br>(Vdc) | DWV<br>(Vdc) | Typical No-Load Insertion Loss (dB) |        |      |       |        |      |     |     |     |
|------------------|-----------------------|------------|------------------------|--------------|-------------------------------------|--------|------|-------|--------|------|-----|-----|-----|
|                  |                       |            |                        |              | 0.01MHz                             | 0.1MHz | 1MHz | 10MHz | 100MHz | 1GHz |     |     |     |
| SFJNC3K00101MC   | 100pF                 | COG/NP0    | 3kV#                   | 3.6kV        |                                     |        |      |       |        | 4    | 22  |     |     |
| SFJNC3K00151MC   | 150pF                 |            |                        |              |                                     |        |      |       |        | 7    | 25  |     |     |
| SFJNC3K00221MC   | 220pF                 |            |                        |              |                                     |        |      |       |        | 10   | 29  |     |     |
| SFJNC2K00331MC   | 330pF                 |            |                        |              |                                     |        |      |       |        | 13   | 33  |     |     |
| SFJNC2K00471MC   | 470pF                 |            | 2kV#                   | 2.4kV        |                                     |        |      |       |        | 1    | 16  | 35  |     |
| SFJNC2K00681MC   | 680pF                 |            |                        |              |                                     |        |      |       |        | 2    | 19  | 39  |     |
| SFJNC2K00102MC   | 1.0nF                 |            |                        |              |                                     |        |      |       |        | 4    | 23  | 41  |     |
| SFJNC2K00152MX   | 1.5nF                 |            | 1kV#                   | 1.2kV        |                                     |        |      |       |        | 7    | 26  | 45  |     |
| SFJNC2K00222MX   | 2.2nF                 |            |                        |              |                                     |        |      |       |        | 10   | 30  | 50  |     |
| *SFJNC2K00332MX  | 3.3nF                 |            |                        |              |                                     |        |      |       |        | 13   | 33  | 52  |     |
| SFJNC2K00472MX   | 4.7nF                 |            |                        |              |                                     |        |      |       |        | 1    | 16  | 36  | 55  |
| *SFJNC2K00682MX  | 6.8nF                 |            | 500#                   | 750          |                                     |        |      |       |        | 2    | 19  | 39  | 57  |
| *SFJNC2K00103MX  | 10nF                  |            |                        |              |                                     |        |      |       |        | 4    | 22  | 41  | 60  |
| SFJNC1K00153MX   | 15nF                  |            |                        |              |                                     |        |      |       |        | 7    | 25  | 44  | 62  |
| SFJNC1K00223MX   | 22nF                  |            |                        |              |                                     |        |      |       |        | 10   | 29  | 46  | 65  |
| *SFJNC1K00333MX  | 33nF                  | X7R        | 1kV#                   | 1.2kV        |                                     |        |      |       |        | 13   | 33  | 48  | 68  |
| SFJNC1K00473MX   | 47nF                  |            |                        |              |                                     |        |      |       |        | 1    | 16  | 35  | 70  |
| *SFJNC1K00683MX  | 68nF                  |            |                        |              |                                     |        |      |       |        | 2    | 19  | 39  | 54  |
| SFJNC5000104MX   | 100nF                 |            | 500#                   | 750          |                                     |        |      |       |        | 4    | 22  | 41  | >70 |
| *SFJNC5000154MX  | 150nF                 |            |                        |              |                                     |        |      |       |        | 7    | 25  | 45  | >70 |
| SFJNC5000224MX   | 220nF                 |            |                        |              |                                     |        |      |       |        | 10   | 29  | 49  | >70 |
| *SFJNC5000334MX  | 330nF                 |            |                        |              |                                     |        |      |       |        | 13   | 33  | 52  | >70 |
| SFJNC5000474MX   | 470nF                 |            | 500                    | 750          |                                     |        |      |       |        | 1    | 16  | 35  | >70 |
| SFJNC3000684MX   | 680nF                 |            |                        |              |                                     |        |      |       |        | 2    | 19  | 39  | >70 |
| *SFJNC2000105MX  | 1.0μF                 |            |                        |              |                                     |        |      |       |        | 4    | 22  | 41  | >70 |
| *SFJNC1000155MX  | 1.5μF                 |            |                        |              |                                     |        |      |       |        | 7    | 25  | 45  | >70 |
| * SFJNC1000225MX | 2.2μF                 |            | 200                    | 500          |                                     |        |      |       |        | 10   | 29  | 49  | >70 |
| SFJNC0500335MX   | 3.3μF                 |            |                        |              |                                     |        |      |       |        | 13   | 33  | 52  | >70 |
|                  |                       |            | 100                    | 250          |                                     |        |      |       |        | 1    | 16  | 35  | >70 |
|                  |                       |            |                        |              |                                     |        |      |       |        | 2    | 19  | 48  | >70 |
|                  |                       |            | 50                     | 125          |                                     |        |      |       |        | 50   | 125 | 52  | >70 |
|                  |                       |            |                        |              |                                     |        |      |       |        | 14   | 34  | 52  | >70 |
|                  |                       |            |                        |              |                                     |        |      |       |        | 34   | 52  | 70  | >70 |
|                  |                       |            |                        |              |                                     |        |      |       |        | 52   | 70  | >70 | >70 |

# Also rated for operation at 115Vac 400Hz. Self-heating will occur - evaluation in situ recommended. \* Recommended values.


**Ordering Information - SFJNC range**

| SF           | J          | N      | C                        | 050  | 0335  |  | M               | X                                    | 1                                     |
|--------------|------------|--------|--------------------------|--|---|--|-----------------|--------------------------------------|---------------------------------------|
| Type         | Case style | Thread | Electrical configuration | Voltage (dc)   | Capacitance in picofarads (pF)  |  | Tolerance       | Dielectric                           | Nuts & Washers                        |
| Syfer Filter | 9.8mm dia. | M6     | <b>C</b> = C Filter      | <b>050</b> = 50V<br><b>100</b> = 100V<br><b>200</b> = 200V<br><b>300</b> = 300V<br><b>500</b> = 500V<br><b>1K0</b> = 1kV<br><b>2K0</b> = 2kV<br><b>3K0</b> = 3kV | First digit is 0. Second and third digits are significant figures of capacitance code.<br>The fourth digit is number of zeros following | Example: <b>0101</b> = 100pF<br><b>0332</b> = 3300pF | <b>M</b> = ±20% | <b>C</b> = COG/NP0<br><b>X</b> = X7R | <b>0</b> = Without<br><b>1</b> = With |

Note: The addition of a 4-digit numerical suffix code can be used to denote changes to the standard part.  
Options include for example: change of pin length / custom body dimensions or threads / alternative voltage rating / non-standard intermediate capacitance values / test requirements.  
Please refer specific requests to the factory.

**Electrical Details**

|                              |                 |
|------------------------------|-----------------|
| Electrical Configuration     | L-C Filter      |
| Capacitance Measurement      | @ 1000hr Point  |
| Current Rating               | 15A             |
| Insulation Resistance (IR)   | 10GΩ or 1000MΩ  |
| Temperature Rating           | -55°C to +125°C |
| Ferrite Inductance (Typical) | 500nH           |

**Mechanical Details**

|                 |                         |
|-----------------|-------------------------|
| Head Diameter   | 9.8mm (0.386")          |
| Nut A/F         | 8.0mm (0.315")          |
| Washer Diameter | 11.35mm (0.447")        |
| Mounting Torque | 0.9Nm (7.97lbf in) max. |

|                        |   |
|------------------------|---|
| Mounting Hole Diameter | 6.2mm (0.244") O.D.<br>5.3mm (0.208") A/F |
|------------------------|---|

|                      |                |
|----------------------|----------------|
| Max. Panel Thickness | 2.9mm (0.114") |
|----------------------|----------------|

|                  |               |
|------------------|---------------|
| Weight (Typical) | 3.0g (0.11oz) |
|------------------|---------------|

|        |                                  |
|--------|----------------------------------|
| Finish | Silver plate on copper undercoat |
|--------|----------------------------------|

| Product Code    | Capacitance<br>(±20%) | Dielectric | Rated Voltage<br>(Vdc) | DWV<br>(Vdc) | Typical No-Load Insertion Loss (dB) |        |      |       |        |      |    |     |
|-----------------|-----------------------|------------|------------------------|--------------|-------------------------------------|--------|------|-------|--------|------|----|-----|
|                 |                       |            |                        |              | 0.01MHz                             | 0.1MHz | 1MHz | 10MHz | 100MHz | 1GHz |    |     |
| SFJNL3K00101MC  | 100pF                 | COG/NP0    | 3kV#                   | 3.6kV        |                                     |        |      |       | 7      | 24   |    |     |
| SFJNL3K00151MC  | 150pF                 |            |                        |              |                                     |        |      |       | 10     | 27   |    |     |
| SFJNL3K00221MC  | 220pF                 |            |                        |              |                                     |        |      |       | 12     | 30   |    |     |
| SFJNL2K00331MC  | 330pF                 |            | 2kV#                   | 2.4kV        |                                     |        |      |       | 1      | 16   | 34 |     |
| SFJNL2K00471MC  | 470pF                 |            |                        |              |                                     |        |      |       | 2      | 19   | 38 |     |
| SFJNL2K00681MC  | 680pF                 |            |                        |              |                                     |        |      |       | 3      | 22   | 41 |     |
| SFJNL2K00102MC  | 1.0nF                 |            |                        |              |                                     |        |      |       | 6      | 25   | 44 |     |
| SFJNL2K00152MX  | 1.5nF                 |            | X7R                    | 1.2kV        |                                     |        |      |       | 9      | 29   | 48 |     |
| SFJNL2K00222MX  | 2.2nF                 |            |                        |              |                                     |        |      |       | 12     | 31   | 51 |     |
| *SFJNL2K00332MX | 3.3nF                 |            |                        |              |                                     |        |      |       | 15     | 35   | 54 |     |
| SFJNL2K00472MX  | 4.7nF                 |            |                        |              |                                     |        |      |       | 1      | 18   | 39 | 57  |
| *SFJNL2K00682MX | 6.8nF                 |            | 1kV#                   | 1.2kV        |                                     |        |      |       | 2      | 21   | 41 | 60  |
| *SFJNL2K00103MX | 10nF                  |            |                        |              |                                     |        |      |       | 4      | 23   | 43 | 63  |
| SFJNL1K00153MX  | 15nF                  |            |                        |              |                                     |        |      |       | 7      | 27   | 46 | 66  |
| SFJNL1K00223MX  | 22nF                  |            |                        |              |                                     |        |      |       | 10     | 30   | 48 | 68  |
| *SFJNL1K00333MX | 33nF                  |            | 500#                   | 750          |                                     |        |      |       | 13     | 34   | 50 | 70  |
| SFJNL1K00473MX  | 47nF                  |            |                        |              |                                     |        |      |       | 1      | 17   | 37 | >70 |
| *SFJNL1K00683MX | 68nF                  |            |                        |              |                                     |        |      |       | 2      | 20   | 40 | 55  |
| SFJNL5000104MX  | 100nF                 |            |                        |              |                                     |        |      |       | 4      | 22   | 44 | >70 |
| *SFJNL5000154MX | 150nF                 |            | 500                    | 600          |                                     |        |      |       | 7      | 25   | 47 | >70 |
| SFJNL5000224MX  | 220nF                 |            |                        |              |                                     |        |      |       | 10     | 29   | 49 | >70 |
| *SFJNL5000334MX | 330nF                 |            |                        |              |                                     |        |      |       | 13     | 33   | 53 | >70 |
| SFJNL5000474MX  | 470nF                 |            |                        |              |                                     |        |      |       | 1      | 16   | 35 | >70 |
| SFJNL3000684MX  | 680nF                 |            | 300                    | 500          |                                     |        |      |       | 4      | 22   | 44 | >70 |
| *SFJNL2000105MX | 1.0μF                 |            |                        |              |                                     |        |      |       | 7      | 25   | 47 | >70 |
| *SFJNL1000155MX | 1.5μF                 |            |                        |              |                                     |        |      |       | 10     | 29   | 49 | >70 |
| *SFJNL1000225MX | 2.2μF                 |            |                        |              |                                     |        |      |       | 13     | 33   | 53 | >70 |
| SFJNL0500335MX  | 3.3μF                 |            | 100                    | 250          |                                     |        |      |       | 1      | 16   | 35 | >70 |
|                 |                       |            |                        |              |                                     |        |      |       | 2      | 20   | 40 | >70 |
|                 |                       |            | 100                    | 125          |                                     |        |      |       | 4      | 22   | 44 | >70 |
|                 |                       |            |                        |              |                                     |        |      |       | 7      | 25   | 47 | >70 |
|                 |                       |            | 50                     | 14           |                                     |        |      |       | 10     | 29   | 49 | >70 |
|                 |                       |            |                        |              |                                     |        |      |       | 13     | 33   | 53 | >70 |

# Also rated for operation at 115Vac 400Hz. Self-heating will occur - evaluation in situ recommended. \* Recommended values.

**Ordering Information - SFJNL range**

| SF           | J          | N      | L                        | 050  | 0335  | M               | X                                    | 1                                     |
|--------------|------------|--------|--------------------------|--|---|-----------------|--------------------------------------|---------------------------------------|
| Type         | Case style | Thread | Electrical configuration | Voltage (dc)   | Capacitance in picofarads (pF)  | Tolerance       | Dielectric                           | Nuts & Washers                        |
| Syfer Filter | 9.8mm dia. | M6     | L = L-C Filter           | <b>050</b> = 50V<br><b>100</b> = 100V<br><b>200</b> = 200V<br><b>300</b> = 300V<br><b>500</b> = 500V<br><b>1K0</b> = 1kV<br><b>2K0</b> = 2kV<br><b>3K0</b> = 3kV | First digit is 0. Second and third digits are significant figures of capacitance code.<br>The fourth digit is number of zeros following<br>Example: <b>0101</b> = 100pF<br><b>0332</b> = 3300pF | <b>M</b> = ±20% | <b>C</b> = COG/NP0<br><b>X</b> = X7R | <b>0</b> = Without<br><b>1</b> = With |

Note: The addition of a 4-digit numerical suffix code can be used to denote changes to the standard part.  
Options include for example: change of pin length / custom body dimensions or threads / alternative voltage rating / non-standard intermediate capacitance values / test requirements.  
Please refer specific requests to the factory.

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for EMI Feedthrough Filters category:***

***Click to view products by Knowles manufacturer:***

Other Similar products are found below :

[FN7561-63-M6](#) [FN7611-63-M6](#) [FN7612-10-M3](#) [FN7660-100-M8](#) [1202F-054](#) [1609991-8](#) [1609992-2](#) [16DFC6-C](#) [16FFD6-HE](#) [2-1609992-2](#)  
[2443-007-X5S0-102MLF](#) [2443-007-X5W0-502ZLF](#) [1609990-8](#) [1609991-3](#) [1609992-1](#) [1609992-3](#) [1609993-1](#) [1609993-7](#) [200AFC6-P](#)  
[200DFC6-P](#) [FN7510-100-M8](#) [FN7510-32-M4](#) [FN7562-100-M8](#) [FN7562-200-M10](#) [FN7563-100-M8](#) [FN7611-10-M3](#) [FN7612-63-M6](#) [2450-001-X5U0-102PLF](#) [2499-003-X5S0-152MLF](#) [32AFC6-H](#) [4100-000LF](#) [4201-050LF](#) [4204-001LF](#) [4253-002LF](#) [4305-001LF](#) [4306-019LF](#)  
[4101-004LF](#) [4201-003LF](#) [4208-000LF](#) [4600-067](#) [094-6526-0000](#) [100AFC6-G](#) [10AFC6-B](#) [10DFC6-C](#) [1-1609990-3](#) [1-1609990-7](#) [1-1609992-8](#) [1-1609990-1](#) [1-1609991-1](#) [FN7510-16-M4](#)