

FBS Series
SMD EMI Suppression Ferrite Bead
Size 1206




CHARACTERISTICS

- Noise countermeasures for general signals, high-speed signals and power line
- Impedance up to 1000Ω
- Up to 6A of rated current
- Quantity: 3000pcs


APPLICATION

- Data lines and low power lines
- Connection between digital and analog circuit

Dimensions: [mm]

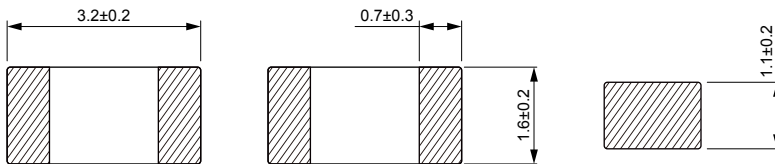

Land Pattern: [mm]



WIDE BAND / HIGH SPEED: W = 4.2
 HIGH CURRENT: W = 5.2













Electrical Properties:








Part No	Impedance @ 100MHz (Ω)	Tolerance	Temperature Rise Current (mA)	DC Resistance (Ω)
FBSWB1206-310-801R	31	±25%	800	0.100
FBSWB1206-700-501R	70	±25%	500	0.150
FBSWB1206-900-501R	90	±25%	500	0.150
FBSWB1206-221-351R	220	±25%	350	0.200
FBSWB1206-601-501R	600	±25%	500	0.250
FBSWB1206-102-351R	1000	±25%	350	0.350
FBSWB1206-122-201R	1200	±25%	200	0.700
FBSHC1206-190-302R	19	±25%	3000	0.030
FBSHC1206-260-602R	26	±25%	6000	0.006
FBSHC1206-520-302R	52	±25%	3000	0.030
FBSHC1206-800-302R	80	±25%	3000	0.040
FBSHC1206-800-402R	80	±25%	4000	0.020
FBSHC1206-121-302R	120	±25%	3000	0.050
FBSHC1206-301-302R	300	±25%	3000	0.060
FBSHC1206-501-252R	500	±25%	2500	0.070
FBSHC1206-501-302R	500	±25%	3000	0.040
FBSHC1206-601-202R	600	±25%	2000	0.080
FBSHC1206-601-252R	600	±25%	2500	0.070
FBSHC1206-102-102R	1000	±25%	1000	0.300

Operating temperature : -55 °C to +125 °C

Temperature Rise Current: The actual value of DC current when the temperature rise is ΔT=40°C

Typical Electrical Characteristics:

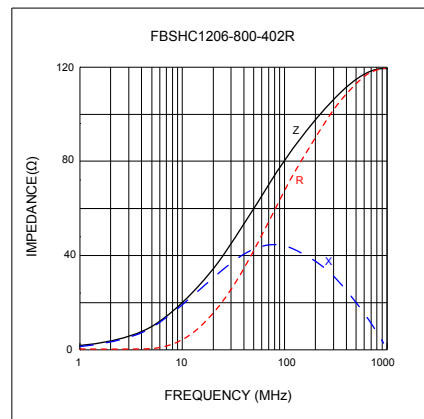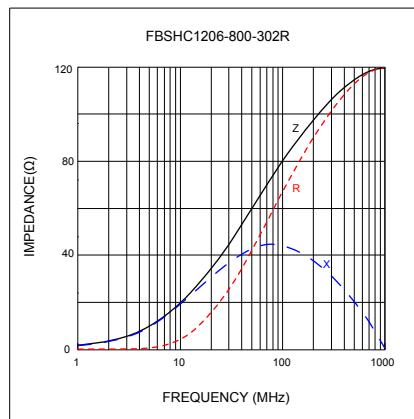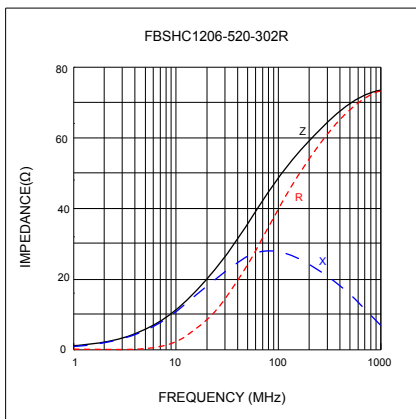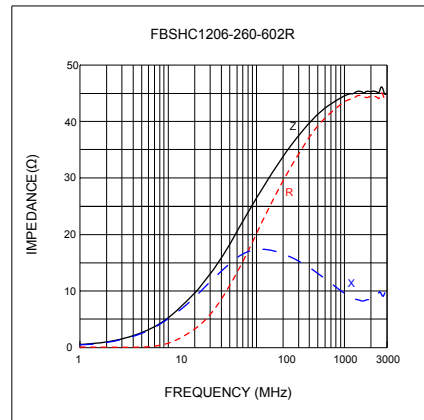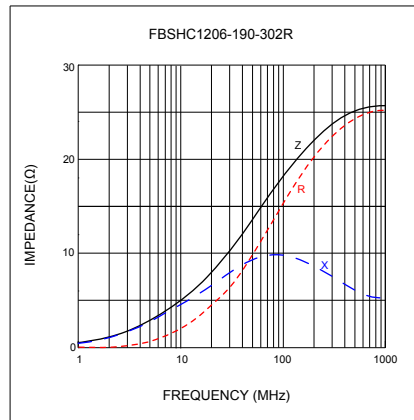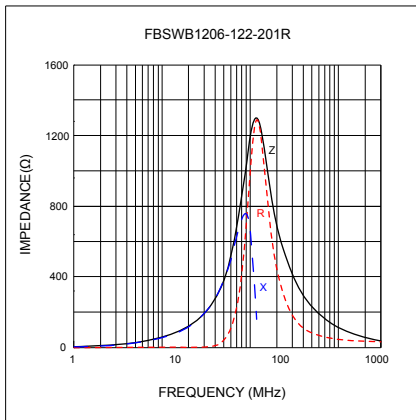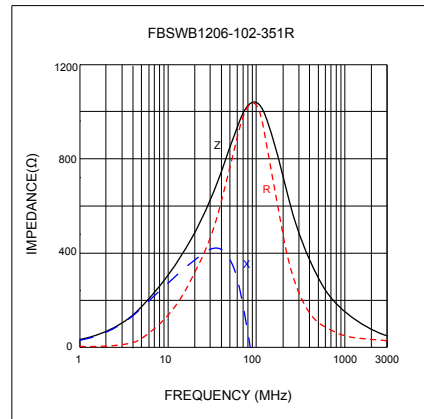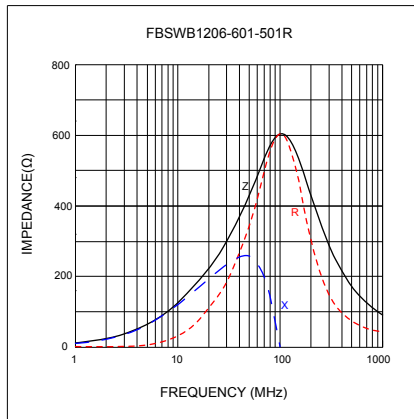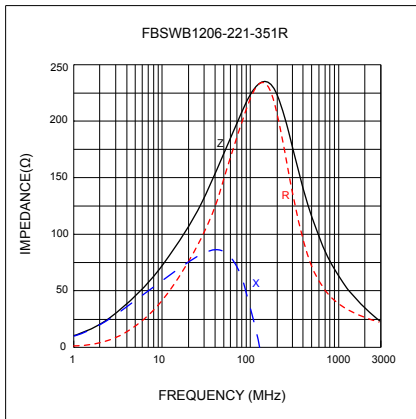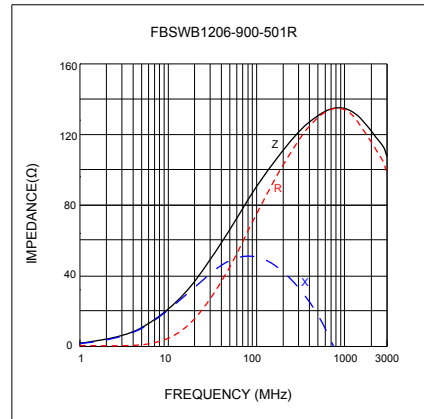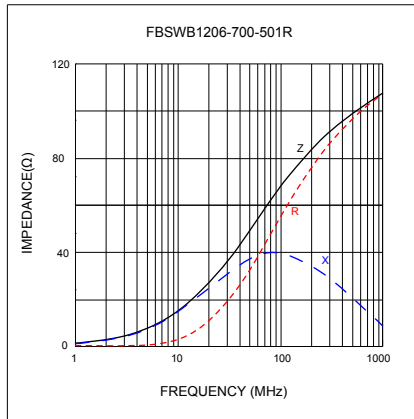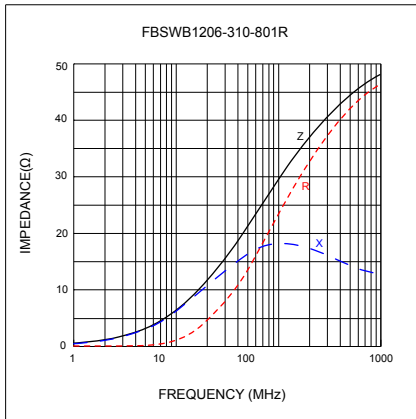

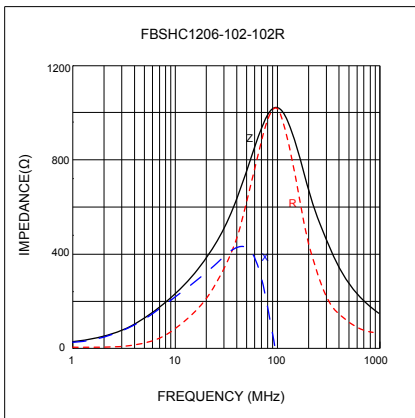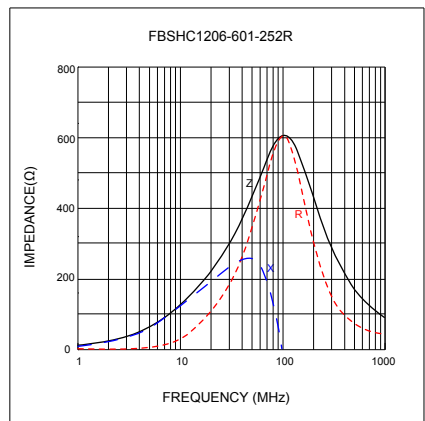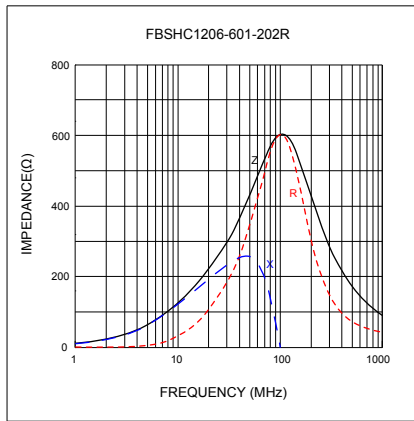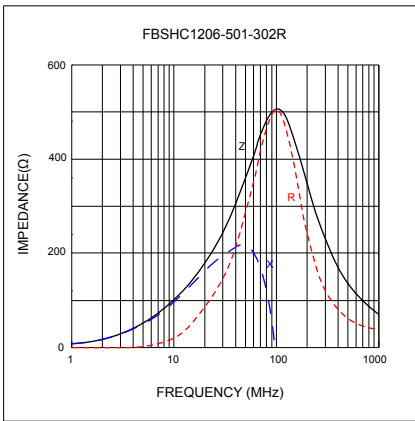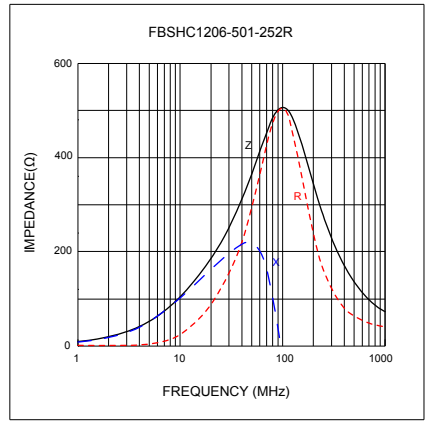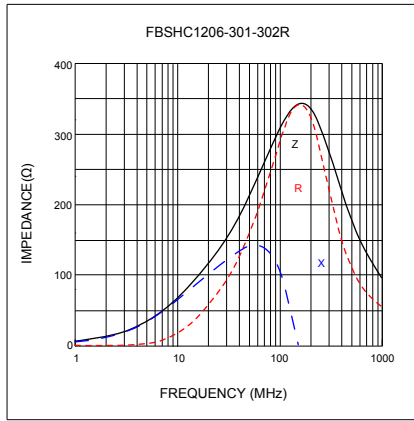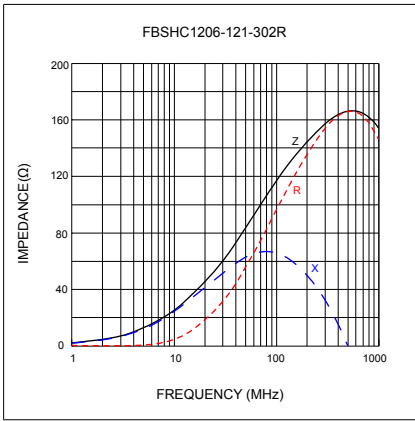

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ferrite Beads](#) category:

Click to view products by [KOHER](#) manufacturer:

Other Similar products are found below :

[CZB1EGTTP700P](#) [CZB1JGTTD152P](#) [CZB2AFTTD800P](#) [CZB2AGTTD121P](#) [CZB2AGTTD601P](#) [CZB2BFTTE600P](#) [PE-0402FB121ST](#)
[DER0705-2.2](#) [NCB0603R301TR050F](#) [NCB-H1206B680TR300F](#) [CZB1JGTTD221P](#) [CZB1JGTTD600P](#) [CZB2AGTTD301P](#)
[CZB2BFTTE301P](#) [CZB2BFTTE601P](#) [4221R-1](#) [432703041971](#) [EMI0805R-600](#) [SBY100505T-100Y-N](#) [NCB-GH0402D121TR060F](#)
[NCB0402P301TR005F](#) [NCB0603R152TR030F](#) [NCB0805A121TR050F](#) [NCB0805A301TR070F](#) [NCB3312K900TR500F](#) [NCB-](#)
[H1206B101TR300F](#) [NCB0402P221TR030F](#) [NCB0805A102TR040F](#) [NCB-H0402P100TR200F](#) [NCB-H0603R121TR300F](#) [NCB-](#)
[H0805A220TR600F](#) [NCB-H1206B601TR200F](#) [CZB1JGTTD202P](#) [CBH160808W221T](#) [EMI1206R-600](#) [WLBD1005HCU330TL](#)
[WLBD2012HCU121TH](#) [WLBD2012HCU221TH](#) [WQBD1608HCU121TH](#) [WLBD1608K2U800TP](#) [74279230](#) [BMB1E0030AN8](#)
[BMB1E0220AN8](#) [BMB1E0300AN8](#) [BMB1E0470AN8](#) [BMB1E0600AN8](#) [BMB1E1000AN8](#) [BMB1J0030AN8](#) [BMB1J0060AN8](#)
[BMB1J0080AN8](#)