


# Silicon Photodetectors

# AEPX Series


The AEPX Series of photodiodes is offered in a range of small active area sizes suitable for high frequency fibre optic applications. These photodetectors take advantage of an epitaxial structure to achieve good high frequency response at operating voltages as low as 5 volts. The detectors may also be operated at higher bias levels up to 20 volts to achieve extremely fast pulsed response.

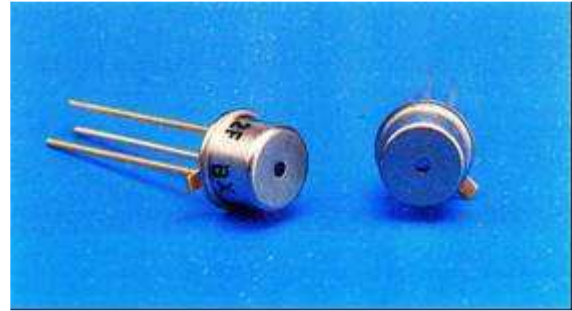


## ABSOLUTE MAXIMUM RATINGS

	Max. Rating
DC Reverse Voltage	30V
Peak Pulse Current (1 $\mu$ s, 1% duty cycle)	200mA
Peak DC Current	10mA
Storage Temperature Range	-55°C to + 125°C
Operating Temperature Range	-55°C to + 120°C
Soldering Temperature Range	200°C

Series AEPX – Typical Spectral Response

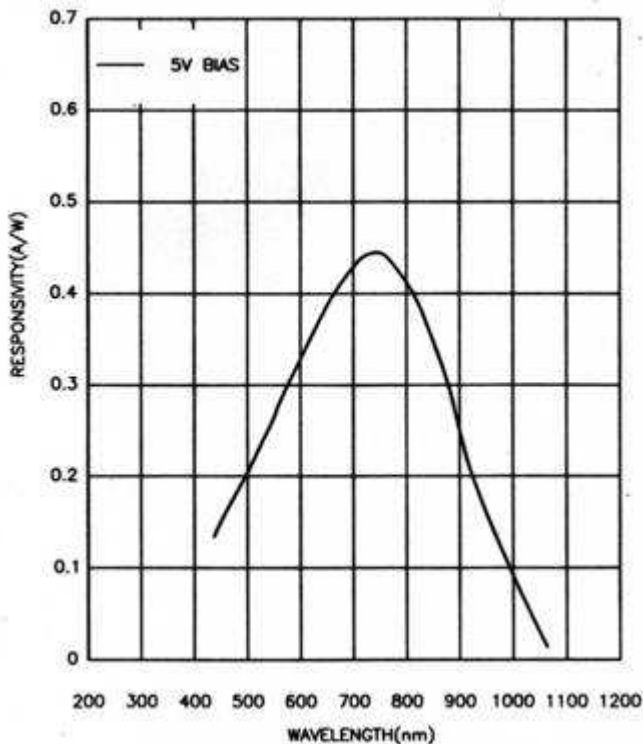

Series AEPX – Typical Capacitance versus Bias Voltage

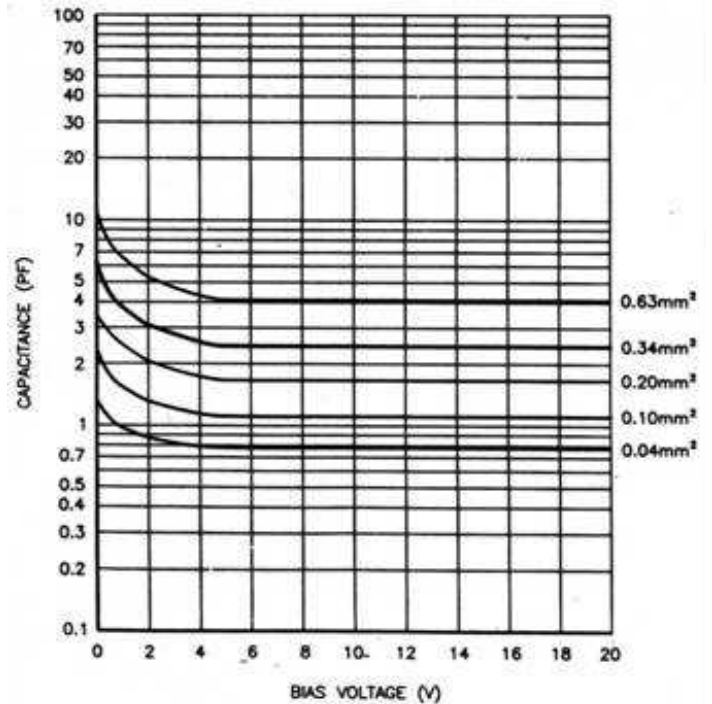

## Electrical / Optical Specifications

Characteristics measured at 22°C (±2) ambient and a reverse bias of 5V unless otherwise stated.

## Single Elements

Type No.	Active Area		Responsivity A/W $\lambda = 820 \text{ nm}$ Typ.	Dark Current nA (5V)		NEP $\text{WHz}^{-1/2}$ $\lambda = 900 \text{ nm}$ 5V Typ.	Capacitance pF		Risetime ns $\lambda = 820 \text{ nm}$ $R_L = 50 \Omega$ Vr = 5V Typ.	Package
	mm <sup>2</sup>	mm		Max.	Typ.		Vr = 5V Max.	Vr = 5V Typ.		
AEPX65R2F	0.55	0.84 dia	0.35	10	2	$6.8 \times 10^{-14}$	8	6	0.6	TO46
AEPX35	0.34	0.66 dia	0.35	5	1	$4.8 \times 10^{-14}$	5	4	0.5	TO46
AEPX20	0.20	0.51 dia	0.35	3	1	$4.8 \times 10^{-14}$	4	3	0.4	TO46
AEPX10	0.10	0.36 dia	0.35	3	0.5	$3.4 \times 10^{-14}$	3	2	0.3	TO46
AEPX04	0.04	0.23 dia	0.35	2	0.2	$2.2 \times 10^{-14}$	2	1.5	0.3	TO46
AEPX008	0.008	0.10 dia	0.35	1	0.1	$1.5 \times 10^{-14}$	1.5	1	0.3	TO46

Highlighted items are Centronic standard products generally available from stock

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [centronic manufacturer](#):*

Other Similar products are found below :

[PHS6/32](#) [EFS-1-40-G](#) [AEPX65](#) [BPX65](#) [BPX65RT](#)