

**FHC Series**  
**SMD Flat Wire High Current Inductor**  
**Size 1890**




**CHARACTERISTICS**

- Low Rdc with flat wire design
- Low cooper losses at high frequency
- Magnetic shielded structure
- Quantity: 150pcs


**APPLICATION**

- High current DC/DC converter
- LC filter

**Dimensions: [mm]**

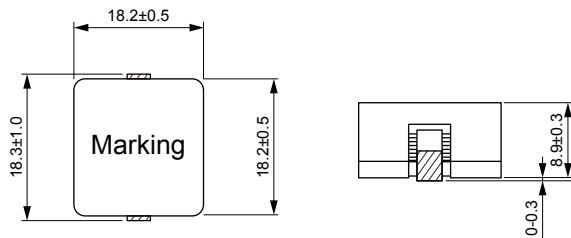

**Land Pattern: [mm]**

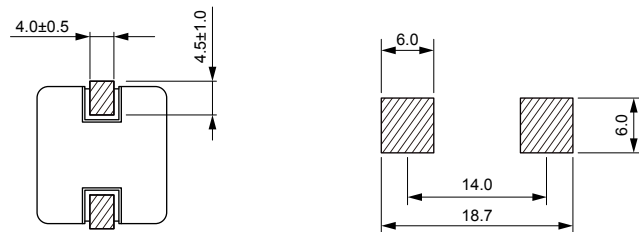

**Electrical Properties:**










Part No	Inductance (μH)	Tolerance	Temperature Rise Current (A)	Saturation Current (A)	DC Resistance Typ. (mΩ)	DC Resistance Max. (mΩ)
FHC1890-R82M	0.82	±20%	41.5	65.0	0.54	0.59
FHC1890-1R3M	1.30	±20%	34.5	62.0	0.94	1.03
FHC1890-1R9M	1.90	±20%	32.5	52.0	1.20	1.30
FHC1890-2R6M	2.60	±20%	31.5	50.0	1.58	1.74
FHC1890-3R5M	3.50	±20%	22.5	37.0	3.10	3.40
FHC1890-4R5M	4.50	±20%	20.5	37.0	3.40	3.70
FHC1890-5R6M	5.60	±20%	19.0	33.0	3.70	4.10
FHC1890-6R8M	6.80	±20%	18.5	27.0	4.10	4.50
FHC1890-100M	10.0	±20%	15.0	21.5	6.90	7.60

Operating Temperature : -40 °C to +125 °C

Temperature Rise Current: the actual value of DC current when the temperature rise is ΔT50 °C

Saturation Current that will cause initial inductance to drop approximately 30%

Typical Electrical Characteristics:

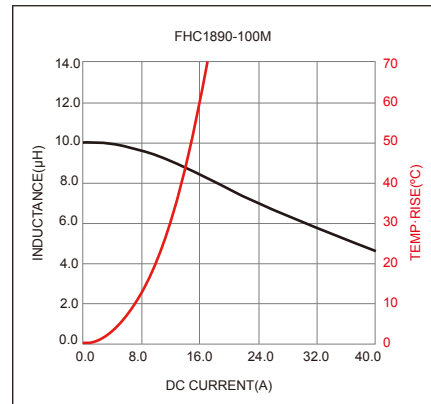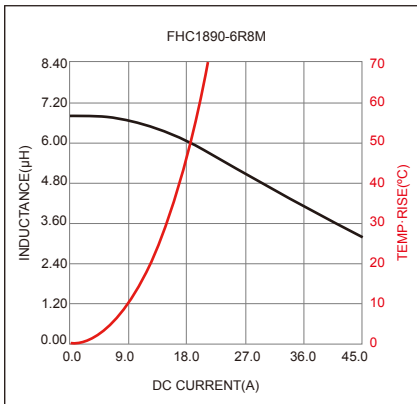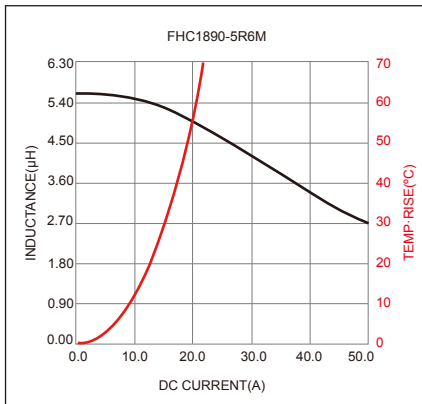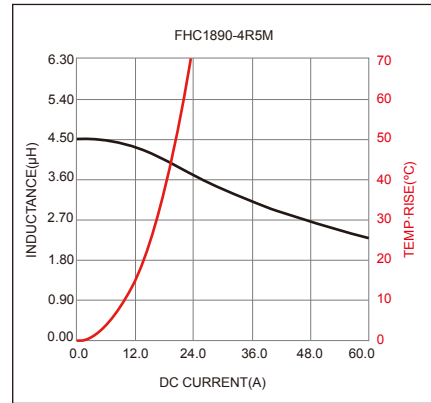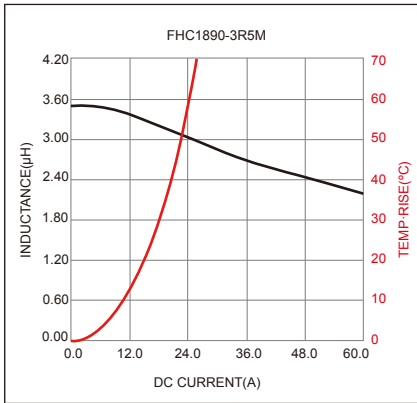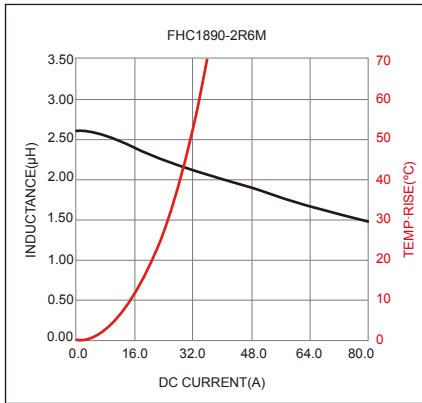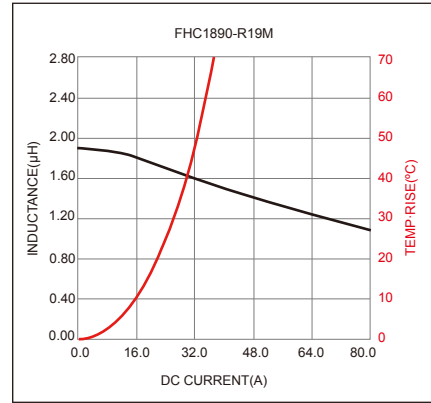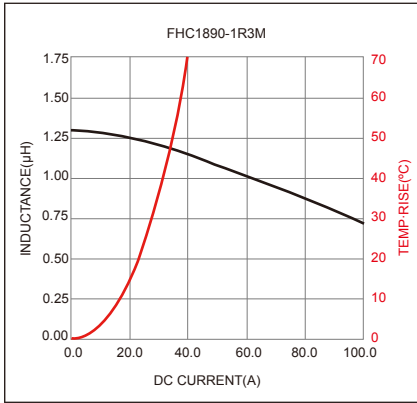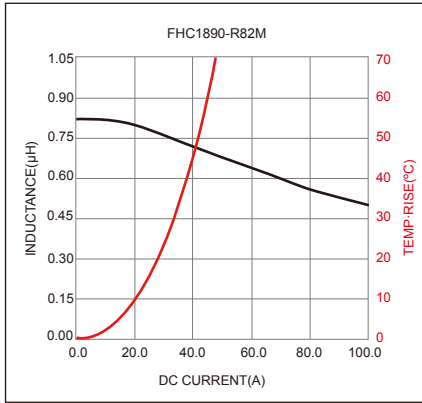

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [KOHER](#) manufacturer:*

Other Similar products are found below :

[CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#) [CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#)