

FHC Series
SMD Flat Wire High Current Inductor
Size 5040




CHARACTERISTICS

- Low Rdc with flat wire design
- Low cooper losses at high frequency
- Magnetic shielded structure
- Quantity: 1500pcs


APPLICATION

- High current DC/DC converter
- LC filter

Dimensions: [mm]

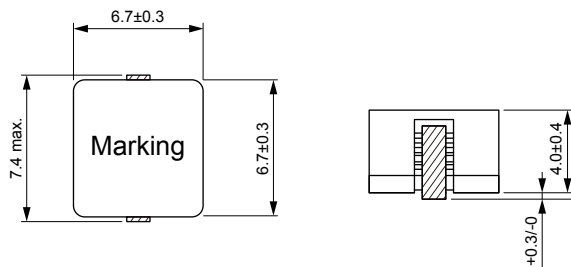

Land Pattern: [mm]

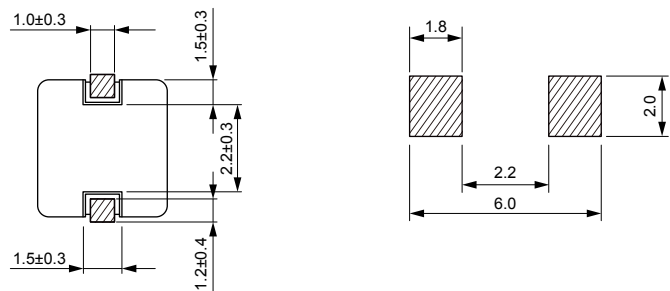

Electrical Properties:

Part No	Inductance (μH)	Tolerance	Temperature Rise Current (A)	Saturation Current (A)	DC Resistance Typ. (mΩ)	DC Resistance Max. (mΩ)
FHC5040-R22M	0.22	±20%	20.0	25.0	1.25	1.38
FHC5040-R33M	0.33	±20%	18.5	20.0	1.75	1.93
FHC5040-R47M	0.47	±20%	15.0	16.0	2.75	3.00
FHC5040-R68M	0.68	±20%	12.8	13.5	4.00	4.40
FHC5040-1R0M	1.00	±20%	11.5	11.5	4.75	5.20
FHC5040-1R5M	1.50	±20%	9.00	9.00	8.15	9.00
FHC5040-2R2M	2.20	±20%	7.50	7.50	11.3	12.4
FHC5040-3R3M	3.30	±20%	5.80	5.80	18.5	20.4
FHC5040-4R7M	4.70	±20%	4.75	4.70	24.5	27.0
FHC5040-5R6M	5.60	±20%	4.50	4.60	28.5	31.4


Operating Temperature: -55°C to +150°C

Temperature Rise Current the actual value of DC current when the temperature rise is ΔT50°C max.


Saturation Current that will cause initial inductance to drop approximately 30%

Typical Electrical Characteristics:

Inductance vs Current Characteristics:

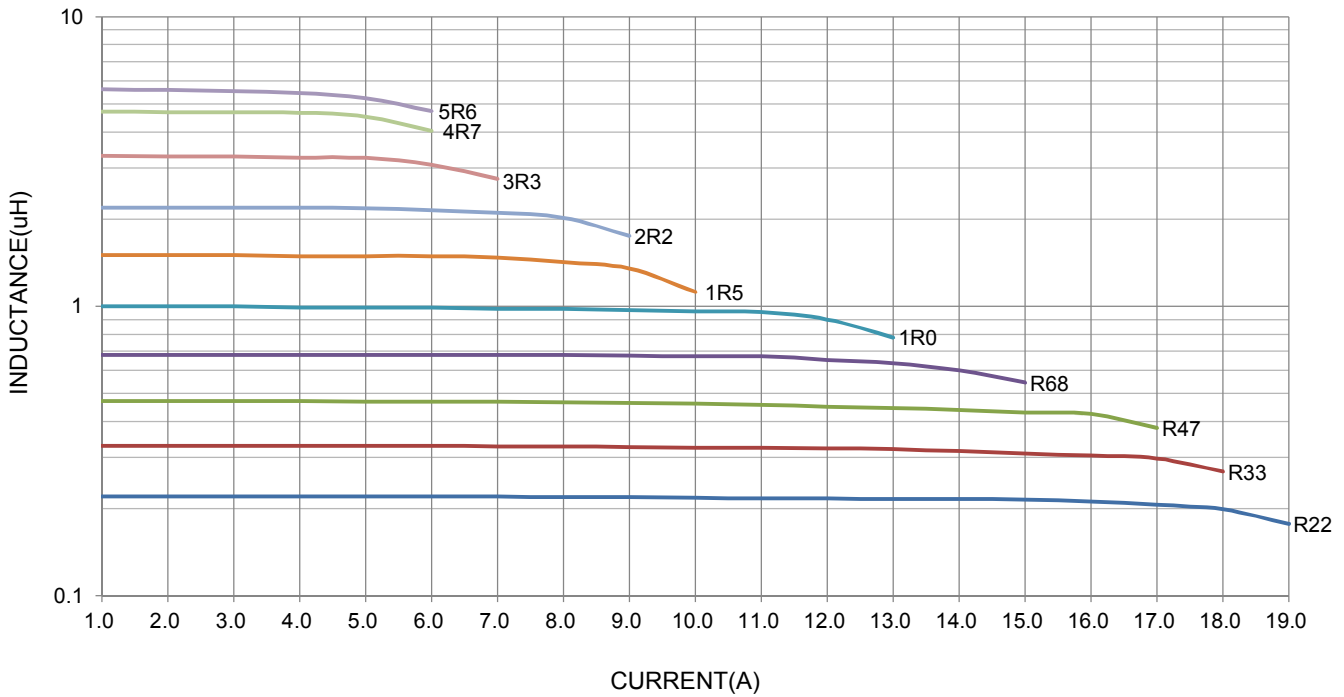

Temperature Rise vs Current Characteristics:

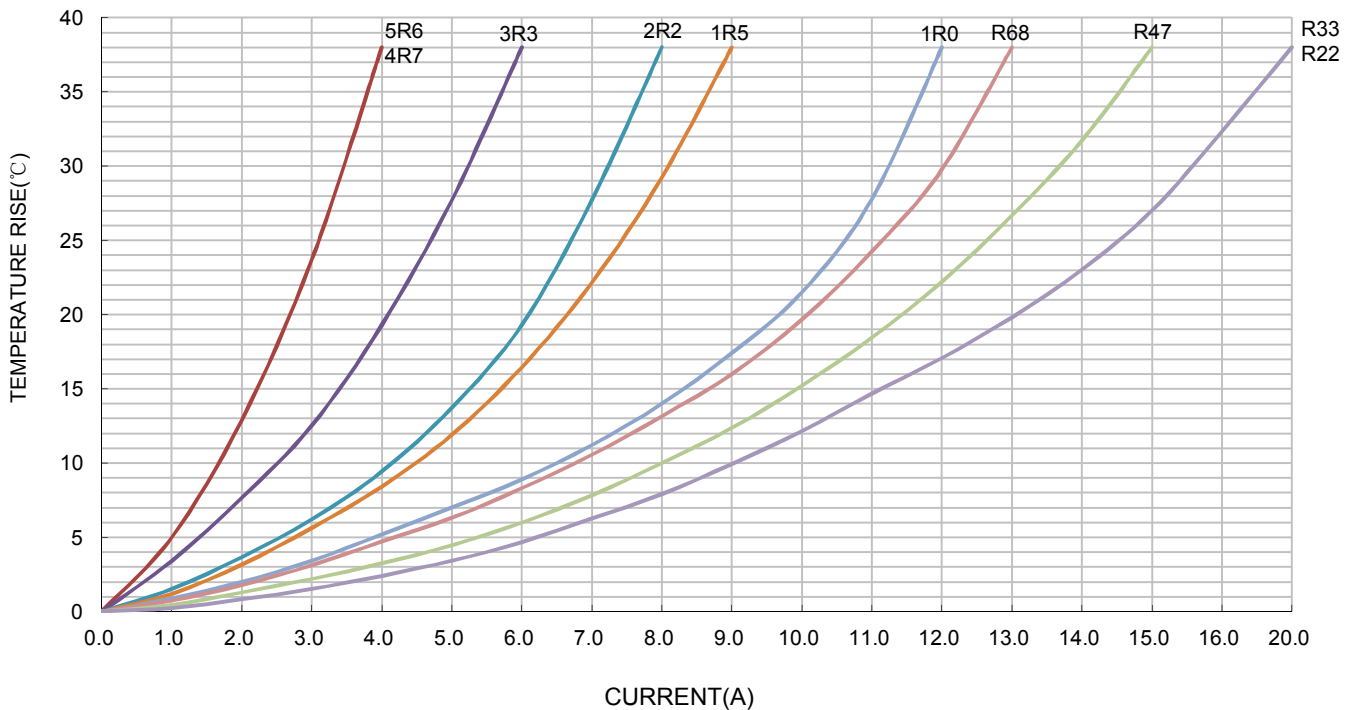

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [KOHER](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [70F224AI](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#)
[PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#)
[HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-](#)
[RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)
[1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#) [1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-](#)
[HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#) [NIN-HDR82JTRF](#) [NIN-HK2N7STRF](#) [NIN-PA150KTR370F](#) [NIN-PB100KTR550F](#)