

7/8"-Splitters/T-Connectors

0906 UTP 301




1 x 7/8" male and 2 x 7/8" Female

Splitter/T-connector, with one 7/8" female, one 7/8" male, and one 7/8" female connectors, 5-poles.

– especially suitable for DeviceNet modules with 7/8" bus connection –


0906 UTP 301

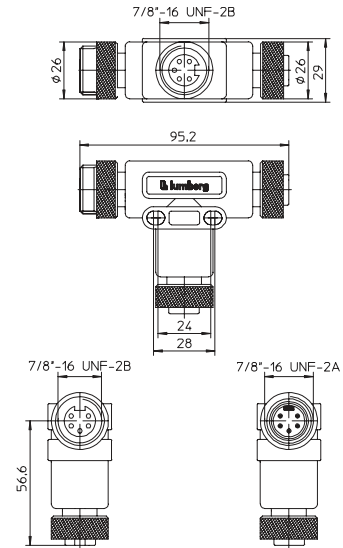

Pin Assignments


Face Views

7/8" - 5 poles



- 1 = drain
- 2 = + 24 V
- 3 = GND (0 V)
- 4 = CAN_H
- 5 = CAN_L

Wiring Diagrams

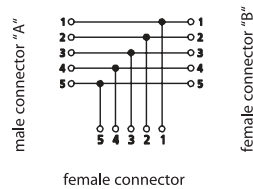



Be Certain with Belden

7/8"-Splitters/T-Connectors

0906 UTP 301

Technical Data

Environmental


Degree of protection IP 67 / NEMA 6P
 Operating temperature range -25°C (-13°F) / +90°C (+194°F)

Mechanical

Housing / Molded body TPU
 Insert TPU
 Contact CuZn, pre-nickel and
 0.8 microns gold-plated
 Coupling nut Aluminum, black anodized

Electrical

Contact resistance $\leq 5 \text{ m}\Omega$
 Nominal current at 20°C
 Trunk: 8 A
 Drop: 4 A
 Nominal voltage 300 V
 Insulation resistance $> 10^9 \Omega$
 Pollution degree 3

Part Number	Pins	Characteristics
0906 UTP 301	5	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular Metric Connectors](#) category:

Click to view products by [Lumberg](#) manufacturer:

Other Similar products are found below :

[1424048](#) [1021212](#) [600X518037X](#) [6STD09SAM99B70X](#) [6STD15PCR99B70A](#) [8R4000A16M020](#) [1200910002](#) [1201150041](#) [1203580030](#)
[1200700064](#) [1200700263](#) [1200700416](#) [1200730102](#) [1200770002](#) [1-2823588-2](#) [130203-0054](#) [1300140026](#) [1300150099](#) [1-3637-600-5205](#)
[1545399](#) [1594331](#) [1600413](#) [1612606](#) [1612618](#) [1614660](#) [1A4000-348](#) [CA06EW24-10P-B-03](#) [21036836414](#) [2823064-1](#) [1610759](#) [A1642LK-](#)
[II-T](#) [1R3006A20M005](#) [41-01016](#) [41-40011](#) [41-40017](#) [42-00006](#) [42-01015](#) [4-22279-4](#) [4-22281-1](#) [4-22284-9](#) [43-00002](#) [43-00113](#) [43-00130](#)
[43-01028](#) [43-01034](#) [43-01088](#) [43-01090](#) [43-01203](#) [43-01209](#) [43-01335](#)