

MDA Series

SMD Low Profile High Current Molded Inductor

Size 1350




FEATURES

- Shielded construction
- Capable of corresponding high frequency .
- Low loss realized with low DCR.
- High performance (Isat) realized by metal dust core.
- Ultra low buzz noise, due to composite construction.
- 100% Lead(Pb)-Free and RoHS compliant.
- High reliability -Reliability test complied to AEC-Q200
- Operating temperature: -55 to +155 °C (including self-temperature rise)
- Quantity: 500PCS


APPLICATION

- Headlamps, tail lamps and interior lighting
- HVAC
- Doors, window lift and seat control
- Audio subsystem
- Digital instrument cluster
- In-Vehicle Infotainment and navigation


Dimensions: [mm] 0.47 μ H-1.0 μ H

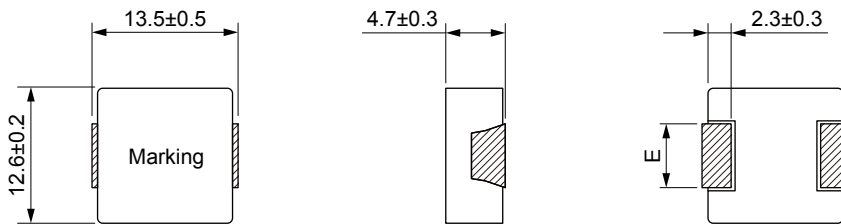


Land Pattern: [mm]

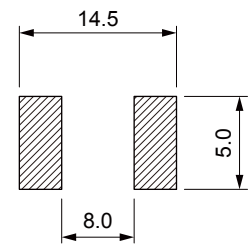

Dimensions: [mm] 1.5 μ H-33 μ H

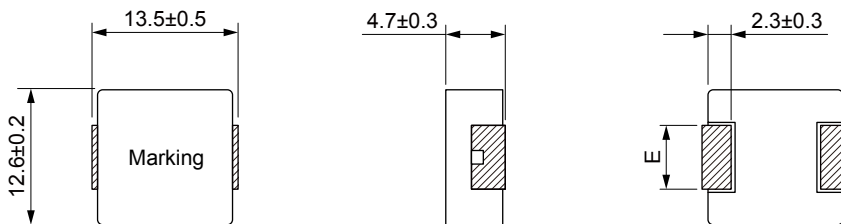

Land Pattern: [mm]

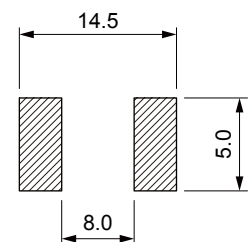

Electrical Properties:







Part No	Inductance @ 100KHz/1V (μ H)	Tolerance	Temperature Rise Current Typ. (A)	Saturation Current Typ. (A)	DC Resistance Typ. (m Ω)	DC Resistance Max. (m Ω)	E
MDA1350-R47M	0.47	±20%	38.0	65.0	0.77	0.90	4.0±0.3
MDA1350-R68M	0.68	±20%	34.0	50.0	1.30	1.55	4.0±0.3
MDA1350-1R0M	1.00	±20%	30.0	40.0	1.60	1.90	4.0±0.3







Part No	Inductance @ 100KHz/1V (μ H)	Tolerance	Temperature Rise Current Typ. (A)	Saturation Current Typ. (A)	DC Resistance Typ. (m Ω)	DC Resistance Max. (m Ω)	E
MDA1350-1R5M	1.50	$\pm 20\%$	25.0	31.0	3.20	3.80	4.7 ± 0.3
MDA1350-2R2M	2.20	$\pm 20\%$	17.0	26.0	4.10	4.80	4.7 ± 0.3
MDA1350-3R3M	3.30	$\pm 20\%$	15.5	23.0	6.00	7.00	4.7 ± 0.3
MDA1350-4R7M	4.70	$\pm 20\%$	14.0	18.5	8.80	10.2	4.7 ± 0.3
MDA1350-6R8M	6.80	$\pm 20\%$	12.0	16.5	13.0	16.0	4.7 ± 0.3
MDA1350-100M	10.0	$\pm 20\%$	10.0	13.0	19.2	22.0	4.7 ± 0.3
MDA1350-150M	15.0	$\pm 20\%$	9.4	11.0	30.0	36.0	4.7 ± 0.3
MDA1350-220M	22.0	$\pm 20\%$	8.0	8.5	42.0	52.0	4.7 ± 0.3
MDA1350-330M	33.0	$\pm 20\%$	6.0	7.3	66.0	80.0	4.7 ± 0.3

Saturation Current will cause L to drop approximately 30%

Temperature Rise Current: The actual value of DC current when the temperature rise is $\Delta T = 40^\circ\text{C}$

Typical Electrical Characteristics:

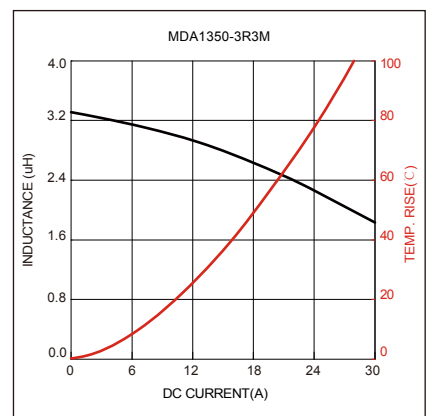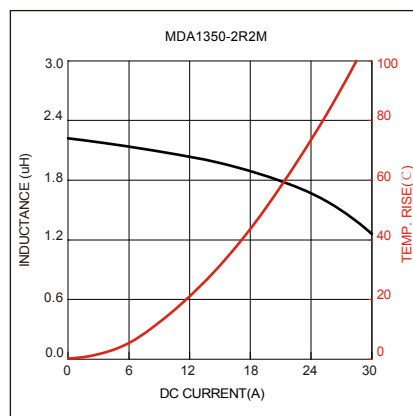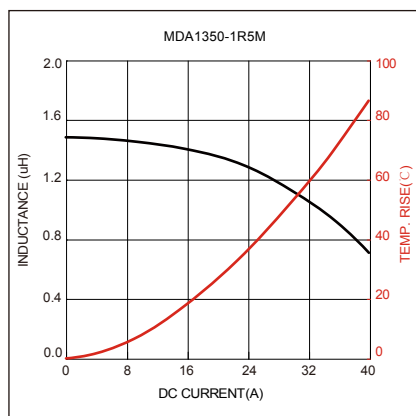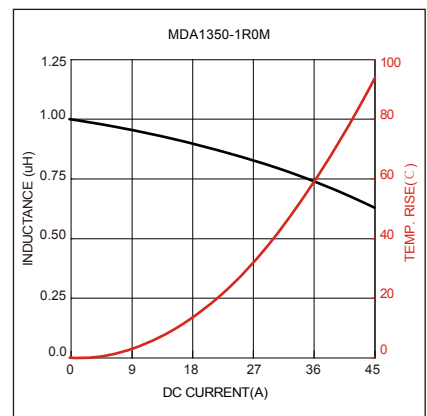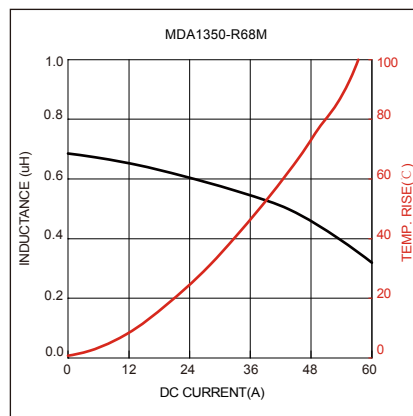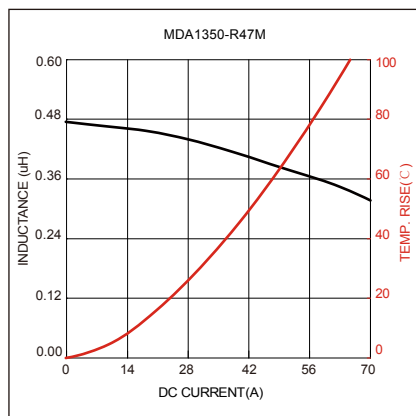

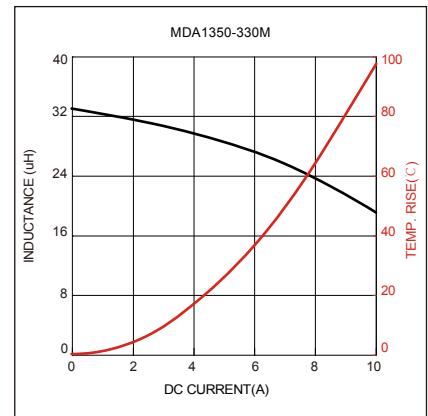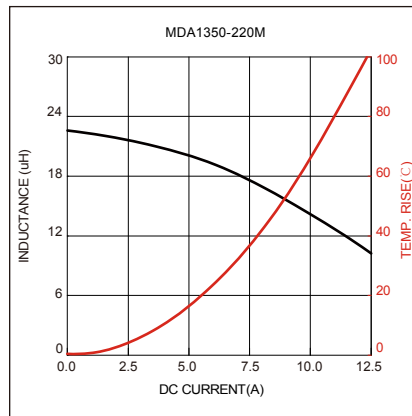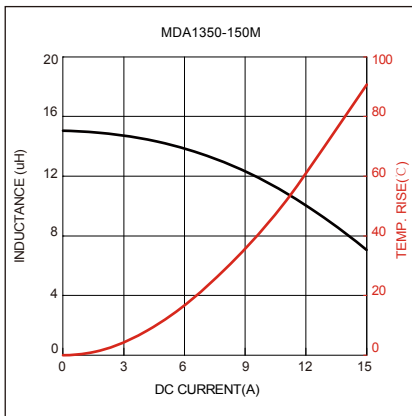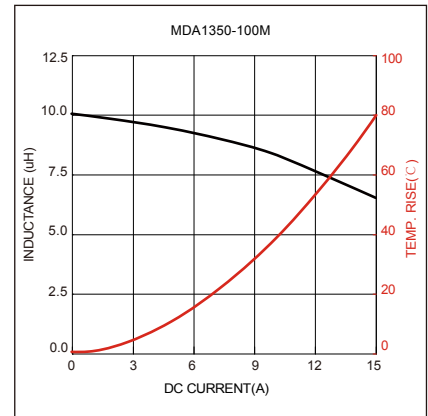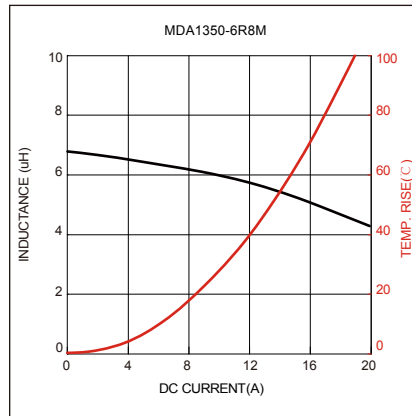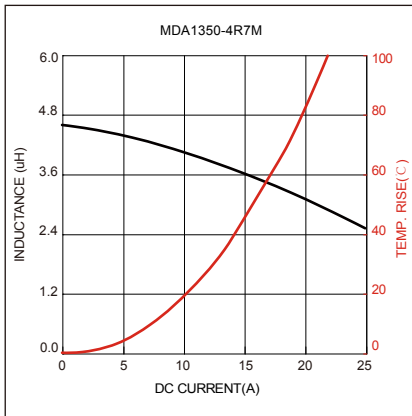

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [KOHER](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [CR54NP-470LC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#)
[MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#)
[1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#)
[RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-](#)
[223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#)
[1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#)