


**MDA Series**  
**SMD Low Profile High Current Molded Inductor**  
**Size 4020**




**FEATURES**

- Shielded construction
- Capable of corresponding high frequency .
- Low loss realized with low DCR.
- High performance (Isat) realized by metal dust core.
- Ultra low buzz noise, due to composite construction.
- 100% Lead(Pb)-Free and RoHS compliant.
- AEC-Q200 qualified
- Operating temperature: -55 to +155 °C
- Quantity: 3000PCS


**APPLICATION**

- Noise filter for various drive circuitry requiring high temp. operation and peak current handing capability.
- Boost-Converter
- Buck-Converter DC/DC

**Dimensions: [mm]**

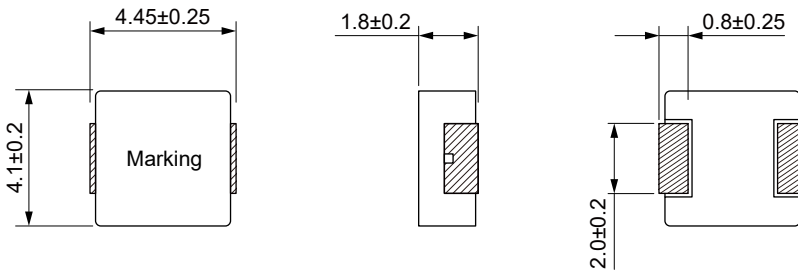

**Land Pattern: [mm]**















**Electrical Properties:**

Part No	Inductance @ 100KHz/1V (μH)	Tolerance	Temperature Rise Current Typ. (A)	Temperature Rise Current Max. (A)	Saturation Current Typ. (A)	Saturation Current Max. (A)	DC Resistance Typ. (mΩ)	DC Resistance Max. (mΩ)
MDA4020-R10M	0.10	±20%	16.0	14.0	26.0	22.0	2.90	3.20
MDA4020-R47M	0.47	±20%	10.0	9.0	9.0	8.0	9.50	11.0
MDA4020-R68M	0.68	±20%	9.0	8.0	7.6	6.6	11.6	13.5
MDA4020-1R0M	1.00	±20%	7.5	6.5	5.5	5.0	19.0	22.0
MDA4020-1R5M	1.50	±20%	6.7	5.8	5.2	4.8	27.0	31.0
MDA4020-2R2M	2.20	±20%	5.5	5.0	4.5	4.0	41.0	48.0
MDA4020-3R3M	3.30	±20%	4.5	3.5	3.1	2.7	65.0	75.0
MDA4020-4R7M	4.70	±20%	3.8	3.2	2.8	2.5	84.0	95.0
MDA4020-5R6M	5.60	±20%	3.2	2.8	2.6	2.3	97.0	115
MDA4020-6R8M	6.80	±20%	2.9	2.5	2.4	2.1	131	157
MDA4020-8R2M	8.20	±20%	2.6	2.3	2.2	2.0	140	168
MDA4020-100M	10.0	±20%	2.4	2.2	2.1	1.9	165	215

Saturation Current will cause L to drop approximately 30%

Temperature Rise Current: The actual value of DC current when the temperature rise is ΔT=40°C

Typical Electrical Characteristics:

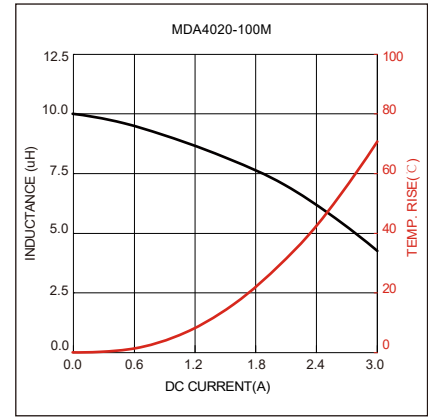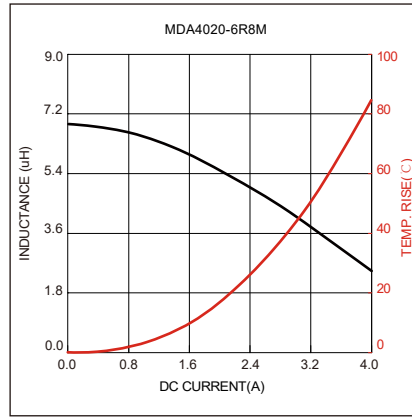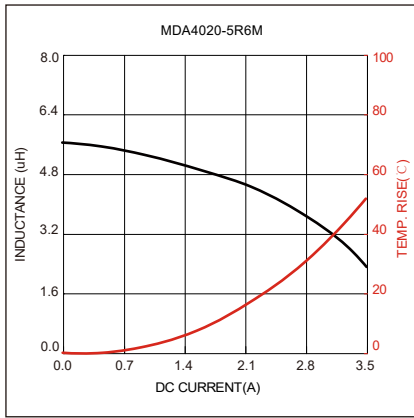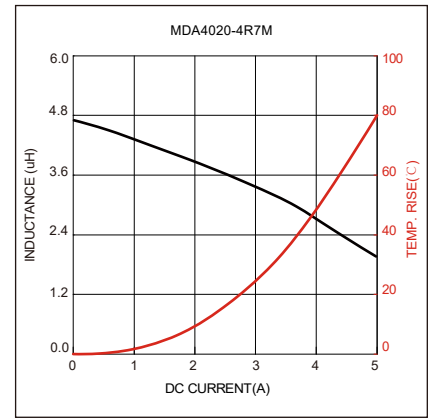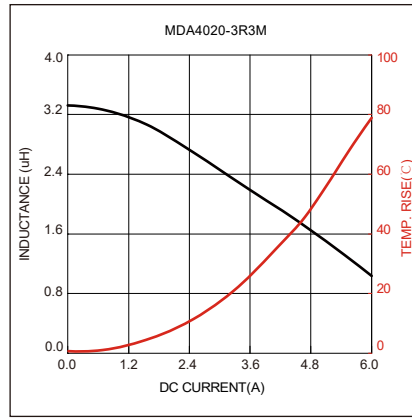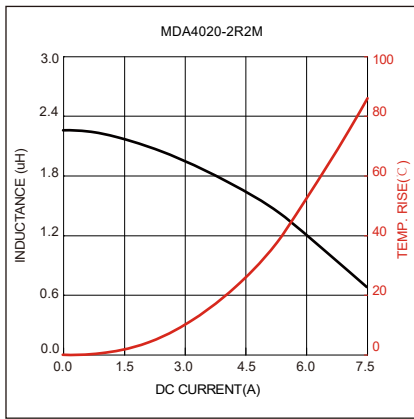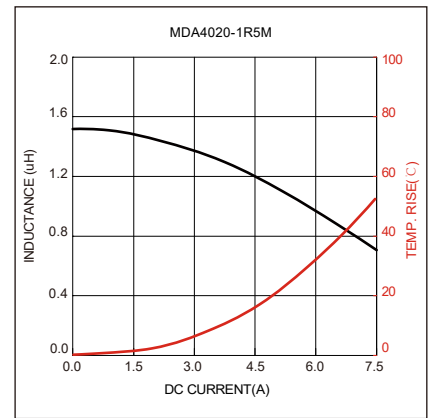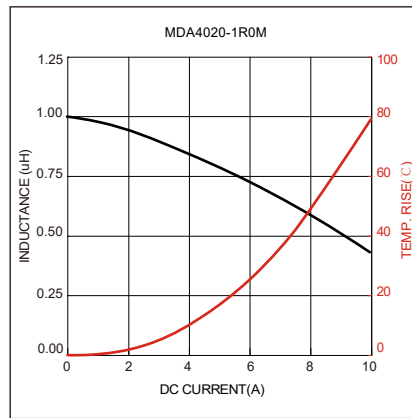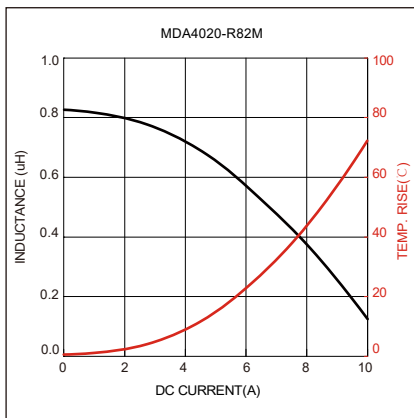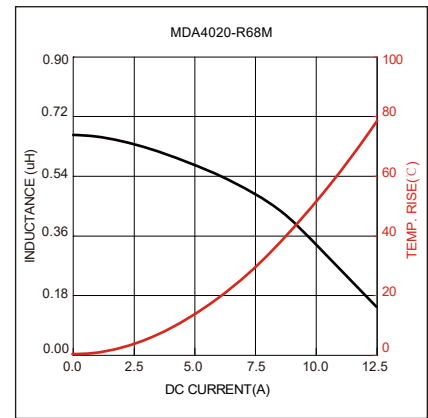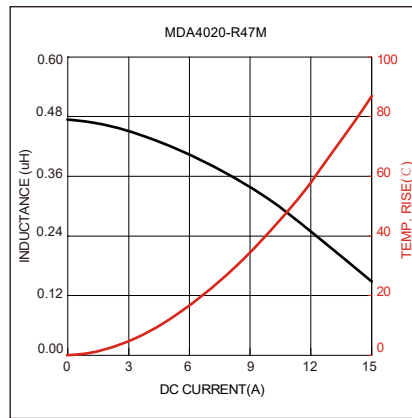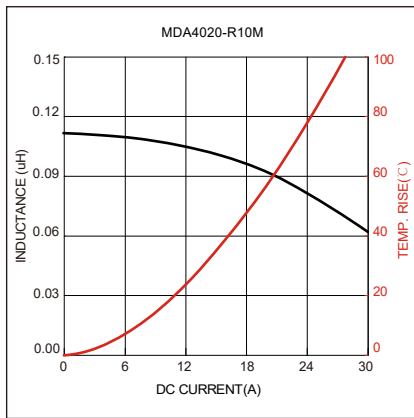

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [KOHER](#) manufacturer:*

Other Similar products are found below :

[CR32NP-100KC](#) [CR54NP-470LC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#)  
[MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#)  
[1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#)  
[RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-](#)  
[223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#)  
[1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#)