

NRSA Series
SMD Power Inductors For Automotive
Size 6045




FEATURES

- Magnetic shield type wound inductor for power circuits using a ferrite magnetic material
- High magnetic shield construction and compatible with high-density mounting.
- Larger current and lower Rdc were achieved by optimizing the ferrite core figure.
- Operating temperature: -55 to +125°C(including self-temperature rise)
- High reliability -Reliability test meet AEC-Q200
- Quantity: 1000pcs


APPLICATION

- Car navigation, car stereo and car accessories only

Dimensions: [mm]

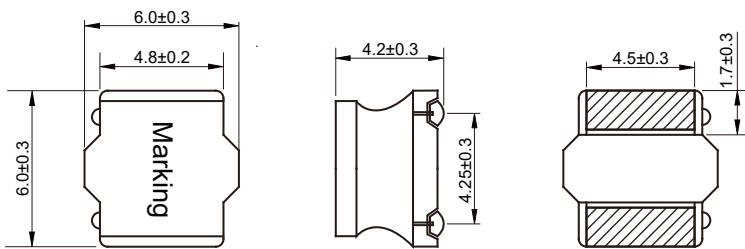

Land Pattern: [mm]



Electrical Properties:







Part No	L@1MHz/1V (μH)	Tolerance	I _{SAT} Typ. (A)	I _{SAT} Max. (A)	I _r Typ. (A)	I _r Max. (A)	R _{DC} ±20% (mΩ)
NRSA6045-R36M	0.36	±20%	18.00	16.50	9.00	8.50	4.8
NRSA6045-R47M	0.47	±20%	17.00	16.00	8.60	8.00	6.8
NRSA6045-R82M	0.82	±20%	14.50	13.50	8.20	7.50	8.5
NRSA6045-1R0M	1.0	±20%	13.50	12.50	8.00	7.30	10.0
NRSA6045-1R2M	1.2	±20%	12.50	11.50	7.50	7.00	10.5
NRSA6045-1R3M	1.3	±20%	12.50	11.50	7.50	7.00	10.5
NRSA6045-1R5M	1.5	±20%	12.00	11.00	7.00	6.60	11.7
NRSA6045-1R8M	1.8	±20%	11.00	10.00	6.80	6.20	12.0
NRSA6045-2R0M	2.0	±20%	10.50	9.50	6.50	5.80	13.5
NRSA6045-2R2M	2.2	±20%	9.50	8.55	6.00	5.30	15.0
NRSA6045-2R3M	2.3	±20%	9.30	8.20	5.80	5.00	16.0
NRSA6045-3R0M	3.0	±20%	8.00	7.50	5.20	4.60	20.0
NRSA6045-3R3M	3.3	±20%	7.80	7.30	5.00	4.50	21.0
NRSA6045-3R6M	3.6	±20%	7.40	6.90	4.90	4.30	22.5
NRSA6045-4R7M	4.7	±20%	6.80	6.20	4.50	4.00	26.0
NRSA6045-5R6M	5.6	±20%	6.40	5.70	4.10	3.70	31.0
NRSA6045-6R3M	6.3	±20%	5.90	5.30	3.80	3.50	33.0
NRSA6045-6R8M	6.8	±20%	5.70	5.15	3.60	3.30	34.0













Part No	L@1MHz/1V (μH)	Tolerance	I _{SAT} Typ. (A)	I _{SAT} Max. (A)	I _R Typ. (A)	I _R Max. (A)	R _{DC} ±20% (mΩ)
NRSA6045-8R2M	8.2	±20%	5.10	4.50	3.40	2.90	46.0
NRSA6045-100M	10	±20%	4.60	4.20	3.20	2.60	52.0
NRSA6045-150M	15	±20%	3.80	3.30	2.80	2.20	71.0
NRSA6045-180M	18	±20%	3.40	2.90	2.60	2.10	80.0
NRSA6045-220M	22	±20%	3.30	2.70	2.30	1.90	96.0
NRSA6045-330M	33	±20%	2.50	2.10	1.80	1.50	145
NRSA6045-470M	47	±20%	2.00	1.75	1.60	1.20	200
NRSA6045-560M	56	±20%	1.80	1.65	1.40	1.00	230
NRSA6045-680M	68	±20%	1.60	1.52	1.10	0.92	305
NRSA6045-820M	82	±20%	1.50	1.40	0.98	0.88	365
NRSA6045-101M	100	±20%	1.33	1.25	0.92	0.82	456
NRSA6045-121M	120	±20%	1.20	1.10	0.85	0.79	500
NRSA6045-181M	180	±20%	1.00	0.90	0.68	0.60	745
NRSA6045-221M	220	±20%	0.88	0.77	0.60	0.50	900













I_R will cause the coil temperature rise approximately Δt40 °C



I_{SAT} will cause L to drop approximately 30% .

Typical Electrical Characteristics:

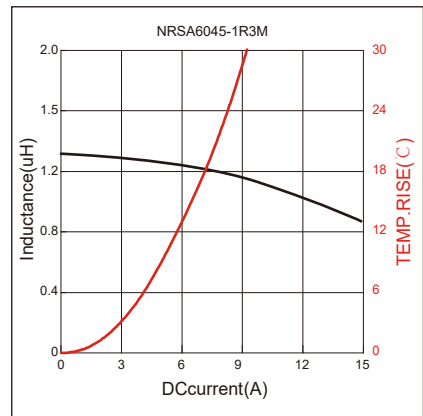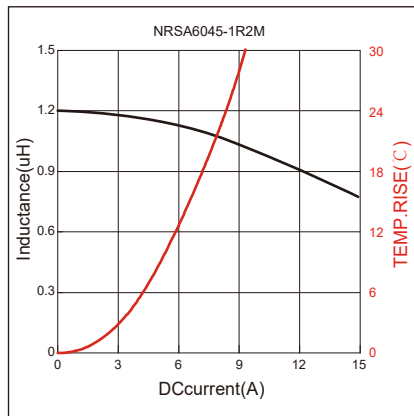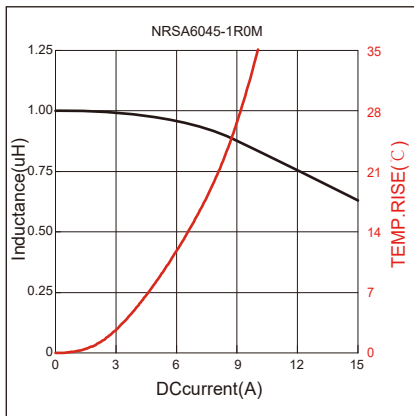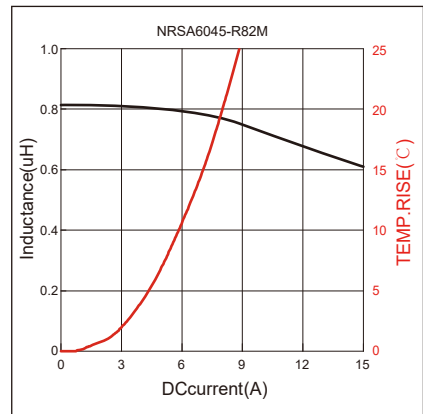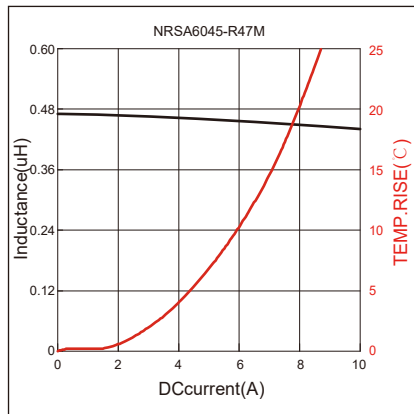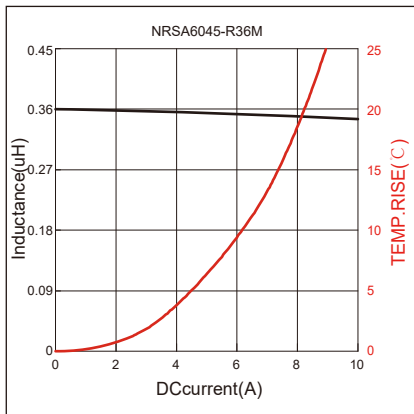

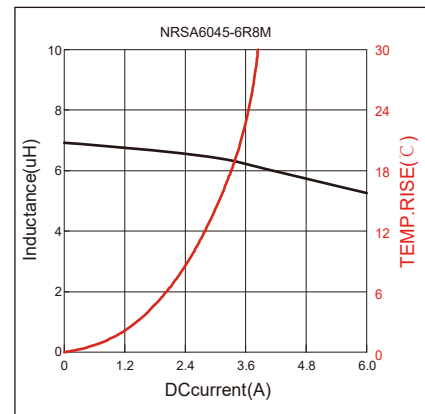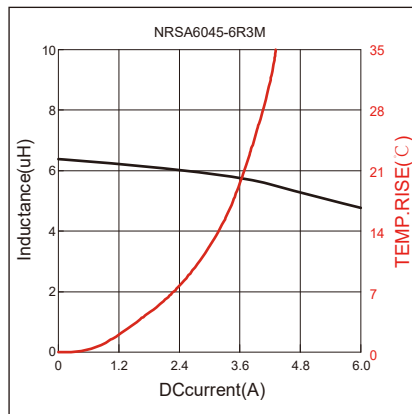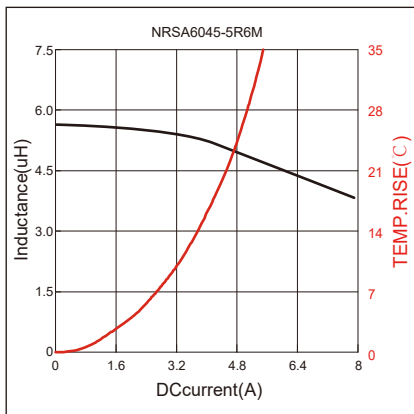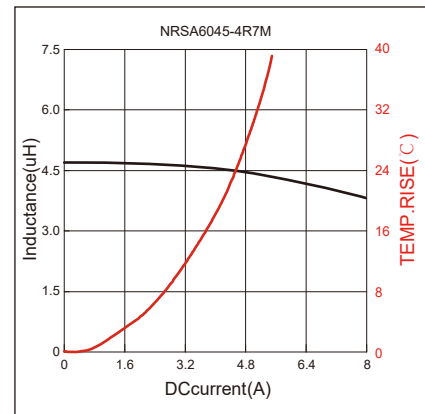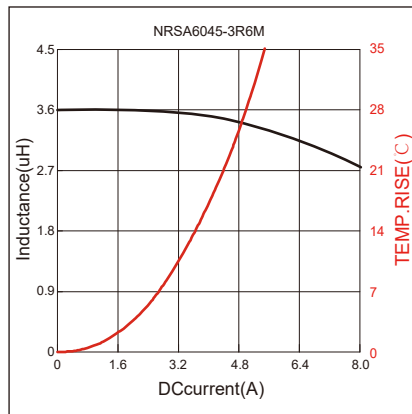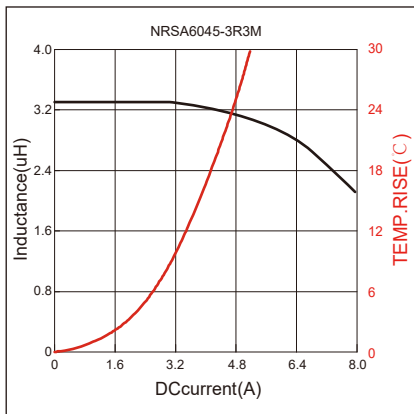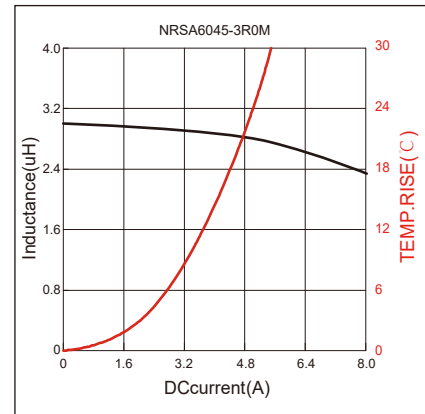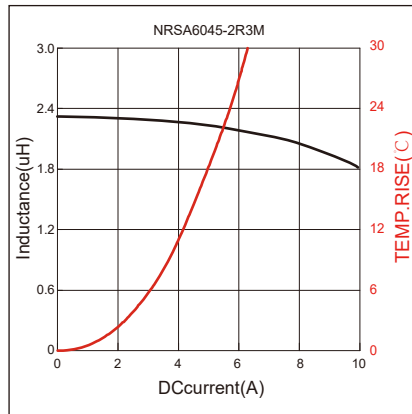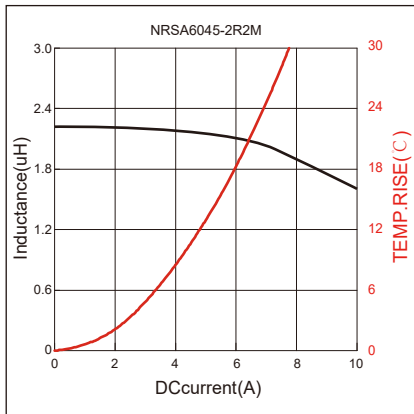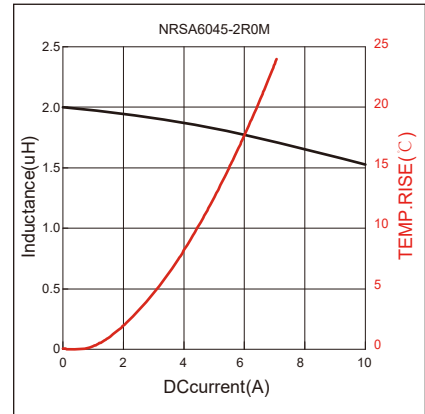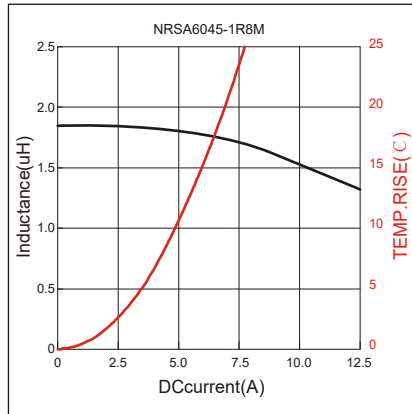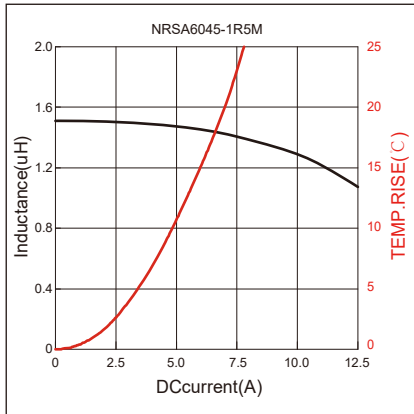

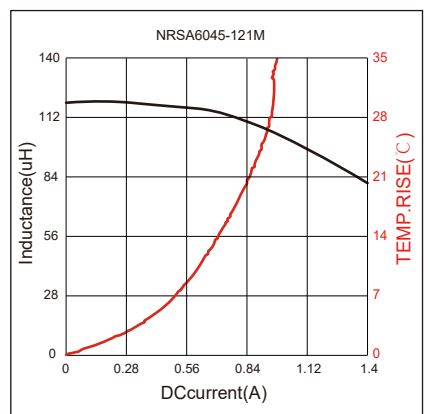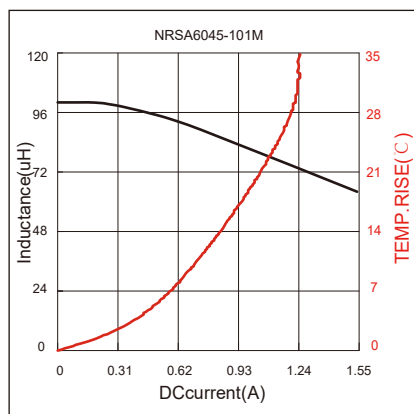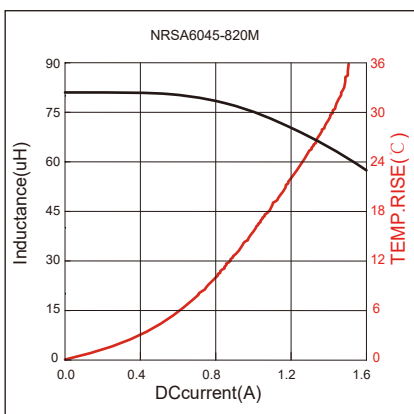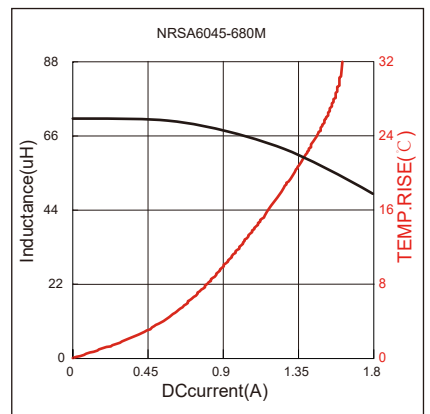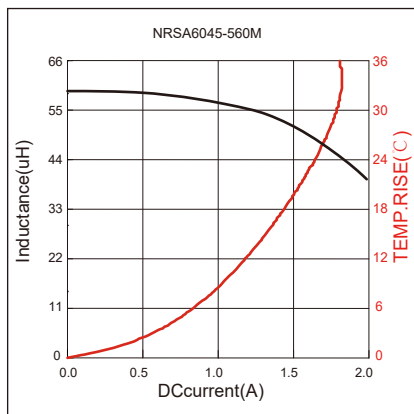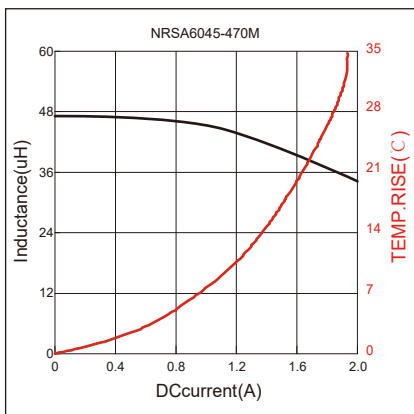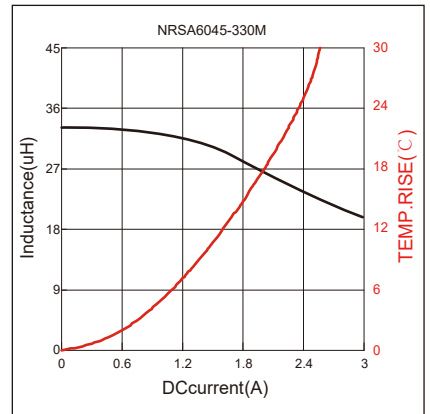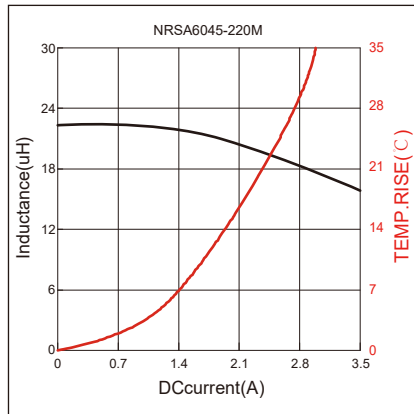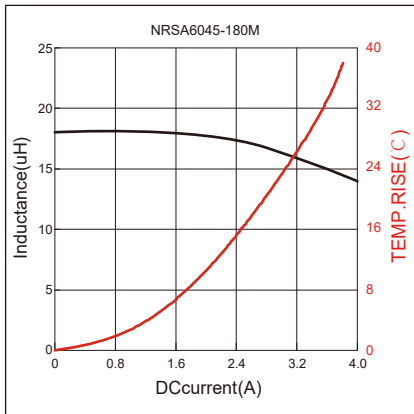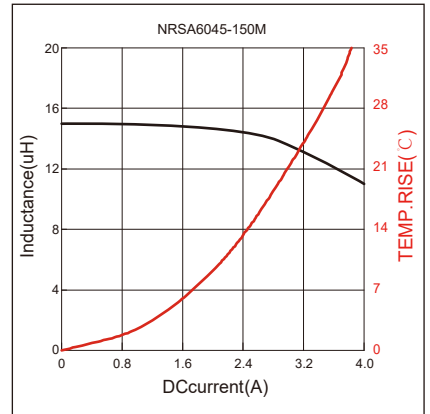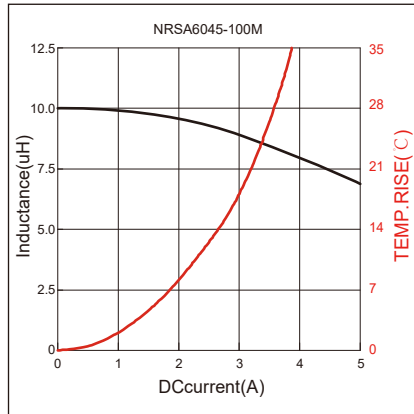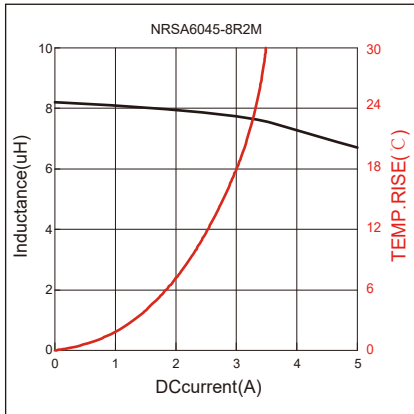

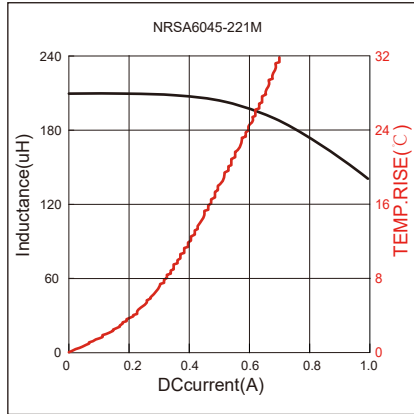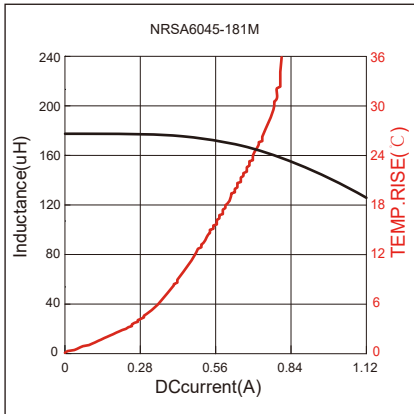

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [KOHER](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [CR54NP-470LC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#)
[MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#)
[1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#)
[RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-](#)
[223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#)
[1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#)