

PMI Series
Power Multilayer Inductor
Size 2012




CHARACTERISTICS

- Compact structure with multilayer
- Magnetically shielded with closed circuit
- Different sizes and types available
- Low loss at high switching frequency
- Quantity: 3000pcs


APPLICATION

- High switching frequency converter


Dimensions: [mm] PMI201210

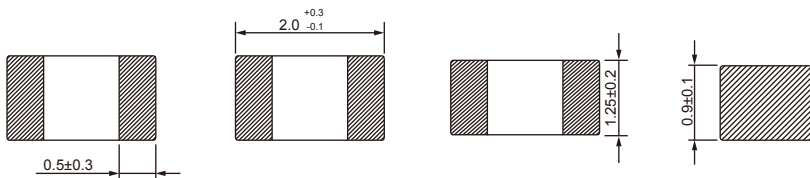


Land Pattern: [mm]



Dimensions: [mm] PMI201214

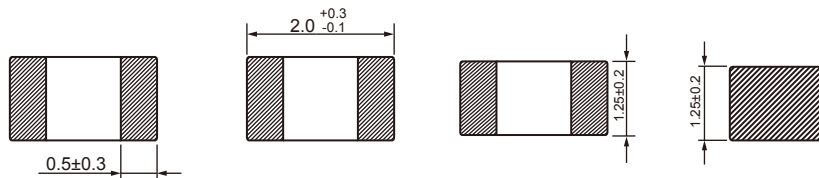

Land Pattern: [mm]



Electrical Properties:



Part No	Inductance (μH)	Tolerance	Temperature Rise Current Max. (mA)	Saturation Current Typ. (mA)	DCR Max. (mΩ)	DCR Typ. (mΩ)	SRF Min. (MHz)
PMI201210S-R47M	0.47	± 20%	1500	1200	100	80	100
PMI201210S-1R0M	1.0	± 20%	1300	1150	137	110	60
PMI201210S-1R5M	1.5	± 20%	1100	800	200	160	50
PMI201210S-2R2M	2.2	± 20%	900	500	250	200	40
PMI201210S-3R3M	3.3	± 20%	900	350	250	200	30
PMI201210S-4R7M	4.7	± 20%	800	280	312	250	30
PMI201214S-6R8M	6.8	± 20%	1000	250	375	300	45
PMI201214S-100M	10	± 20%	1000	130	375	300	35

Operating Temperature: -40 °C~+125 °C

Temperature rise current : The actual value of DC current when the temperature rise is ΔT40 °C

Saturation Current that will cause initial inductance to drop 30% approximately .

Typical Electrical Characteristics:

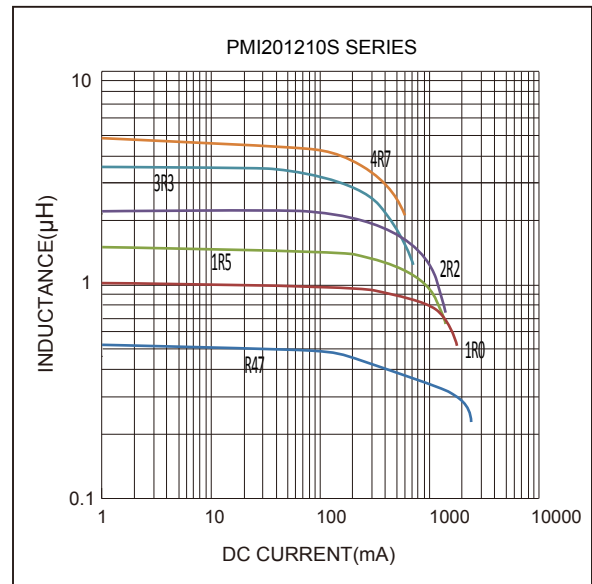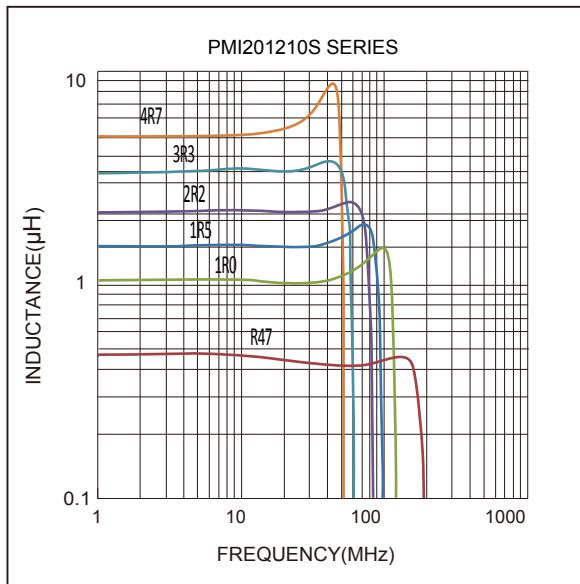

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [KOHER](#) manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHQ1005P10NJ](#)
[MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-](#)
[53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-](#)
[471XJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC3-R50-R](#) [HC8-1R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-](#)
[4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#)
[ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#)