

Part No. P622301

Embedded FR4 LTE-M/ NB-IoT / LPWA Antenna

700-960 MHz; 1710-2170 MHz

Supports: LTE-M, NB-IoT, SigFox, LoRa, Cellular LPWA, RPMA, Firstnet



KYOCERA AVX's standard antennas provide high performance. They require a smaller design keep-out area, carry lower program development risk which yields a quicker time-to-market, without sacrificing RF performance. This center feed LTE antenna provides flexible tuning options within a small PCB form factor.

Hexa Band LTE FR4 Embedded Antenna

Low Band 700 – 960 MHz
High Band 1710 - 2170 MHz

KEY BENEFITS

Reduced Costs and Time-to-Market

Standard antenna eliminates design fees and cycle time associated with a custom solution; getting products to market faster.

Greater Flexibility with Unique Form Factors

Ethertronics' technology helps you deliver more advanced ergonomic designs without adverse impact on product performance.

Environmental Compliance

Comply with latest RoHS requirements

APPLICATIONS

- IoT
- Healthcare
- Smart Metering
- Tracking
- M2M
- Industrial Devices
- SigFox
- LoRa
- Cellular
- LPWAN
- RPMA
- LTE Cat-M1

Electrical Specifications

Typical Characteristics, on 60 x 40 mm PCB

Frequency	700 - 960 MHz	1710 - 2170 MHz
Efficiency	15%	45%
Return Loss	< -2.25 dB	< -3.0 dB
Peak Gain	-0.89 dBi	1.06 dBi
Polarization	Linear	
Power Handling	2 Watts CW	
Radiation Pattern	Omni-directional	
Feed Point Impedance	50 ohms unbalanced	

Mechanical Specifications & Ordering Part Number


Ordering Part #	P622301
Dimensions (mm)	35.0 x 9.0 x 3.2
Weight (grams)	2.1
Mounting	SMT (P&P)
Packaging	1,120 pcs/reel; 5,600 pcs/box
Demo Board	P622301-01

Embedded FR4 LTE-M/ NB-IoT / LPWA Antenna Specifications.
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Dimensions

Typical antenna dimensions (mm)


Part Number	A	B	C
P622301	35.0	9.00	3.2 ± 0.3

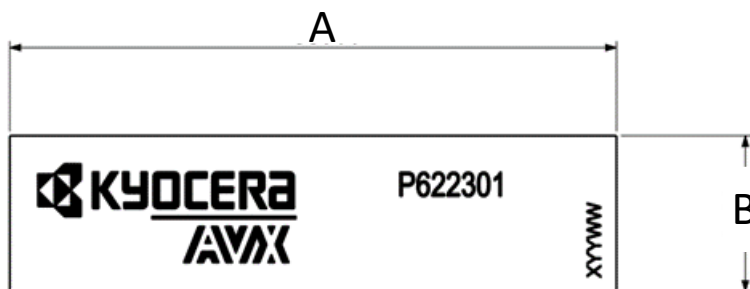


Top View

Pin Descriptions

Pin#	Description
1	Feed
2	Tuning Pad
3	Tuning Pad

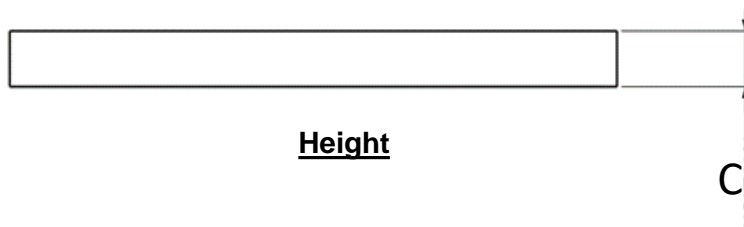

Height

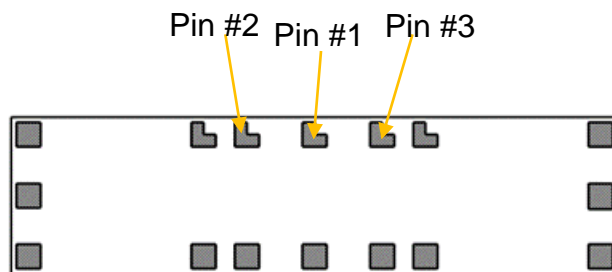


Bottom View


Embedded FR4 LTE-M/ NB-IoT / LPWA Antenna Specifications.
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Return Loss and Efficiency Plots


Typical Performance on 60 x 40 mm PCB

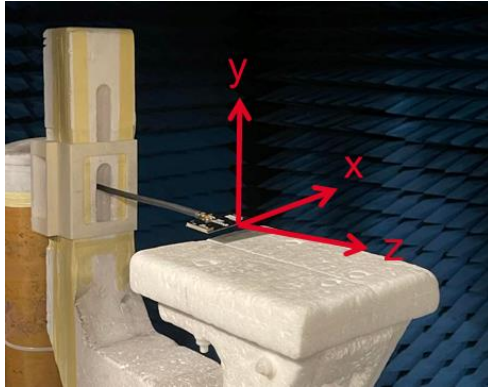


Low Band Return Loss

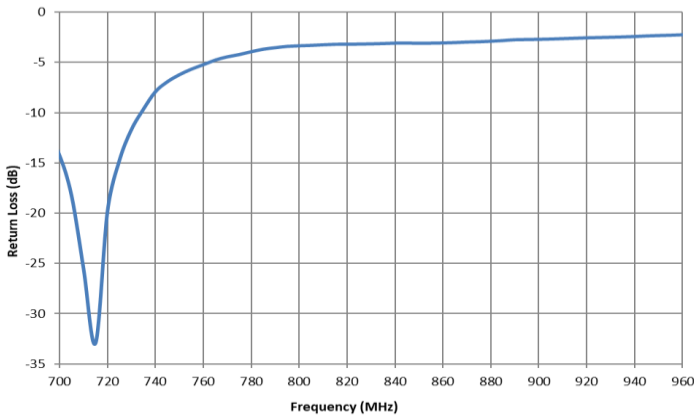


High Band Return Loss

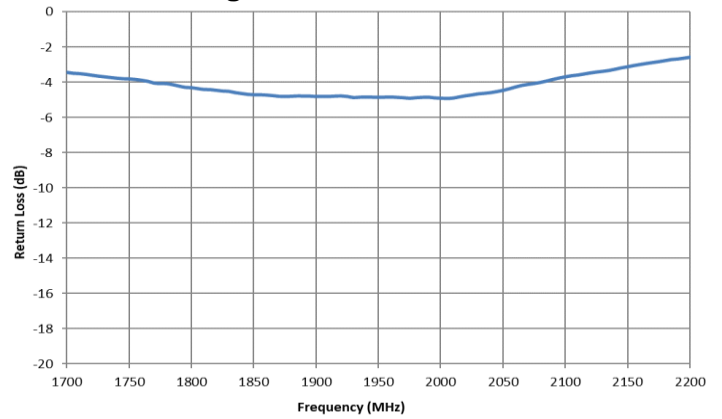

Low Band Efficiency

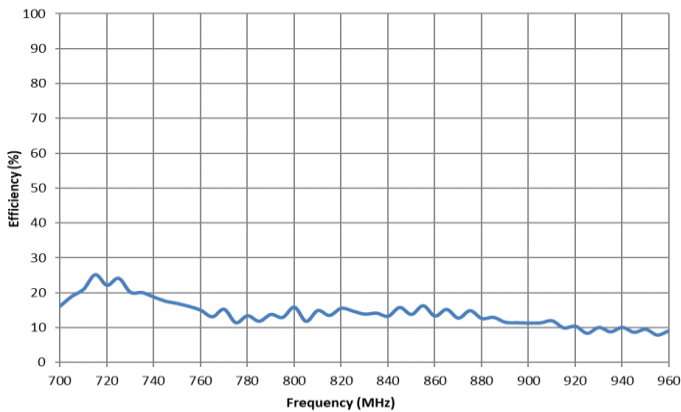


High Band Efficiency

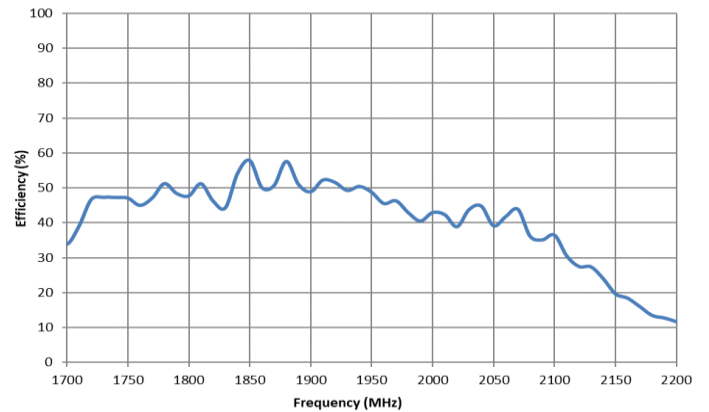


Embedded FR4 LTE-M/ NB-IoT / LPWA Antenna Specifications.
 KYOCERA AVX produces a wide variety of standard and gain custom antennas to meet user needs.

Antenna Radiation Patterns (Low & High Band)


Typical Performance on 60 x 40 mm PCB

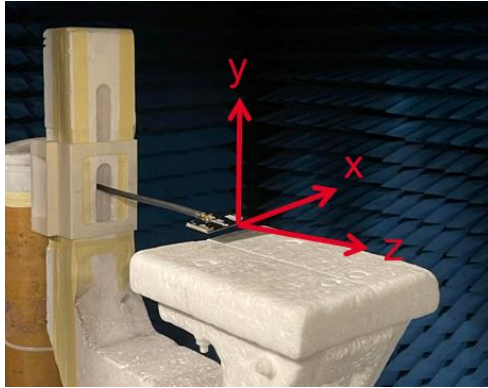

Measured at
700,750,800,900 MHz

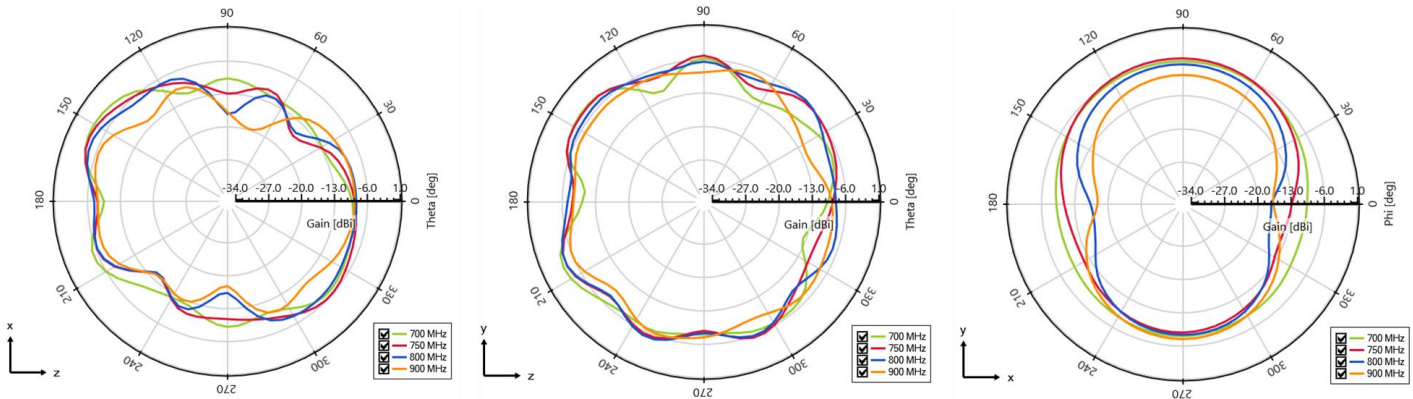



Measured at
1710,1800,1900,2100 MHz

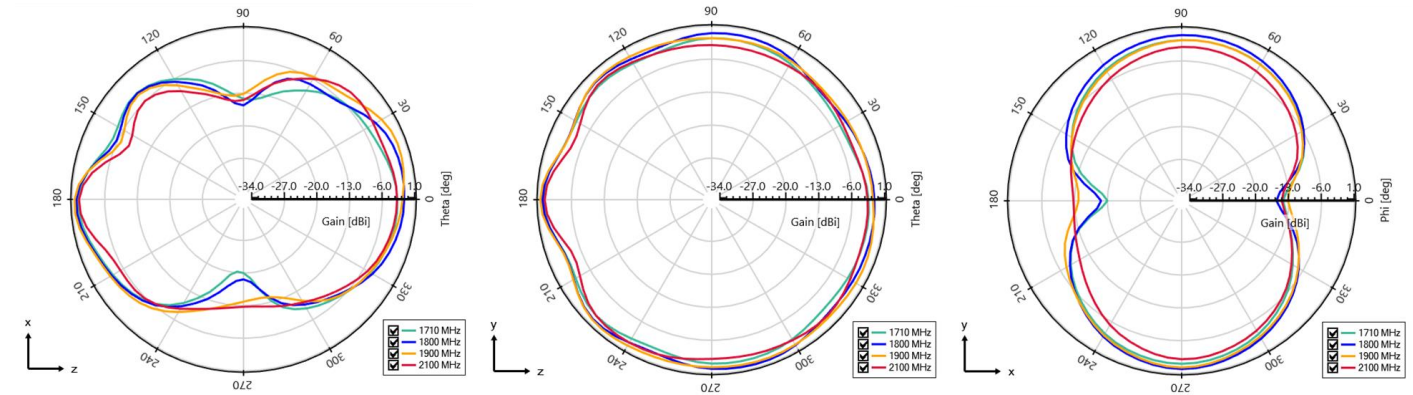

Embedded FR4 LTE-M/ NB-IoT / LPWA Antenna Specifications.
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Antenna Layout

Typical layout dimensions (mm)

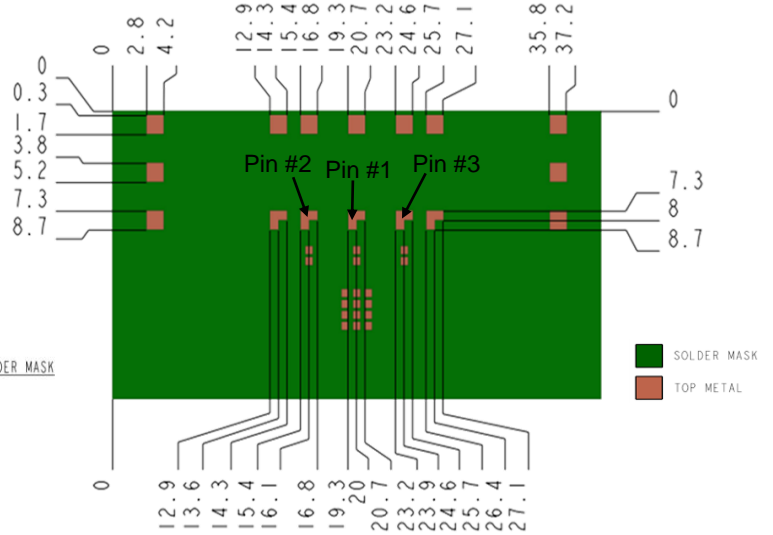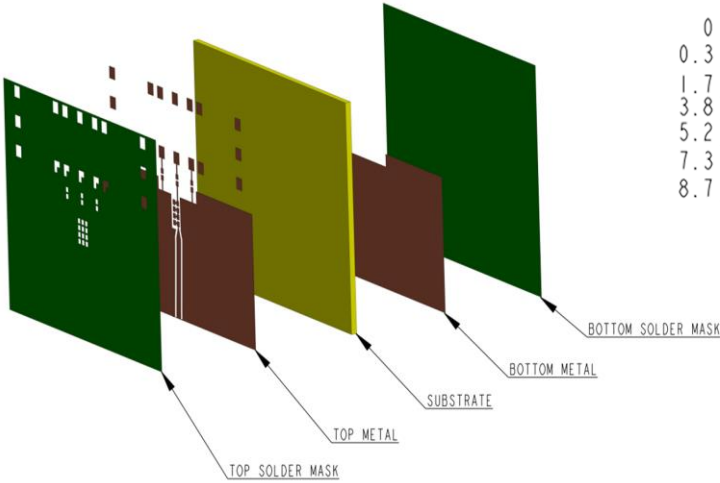



* VIAS: Diam. 0.2mm, (no vias on transmission lines).
 Via holes must be covered by solder mask

Pin Descriptions

Pin#	Description
1	Feed
2	Tuning Pad
3	Tuning Pad

Matching & Tuning Component Values

Component	Value	Tolerance
S1	0ohm	N/A
P1	13nH	± 2%
S2	2pF	± 0.02pF
P2	DNI	N/A
P3	DNI	N/A
S3	0ohm	N/A
P4	DNI	N/A
R1	20nH	± 2%
R2	22nH	± 2%

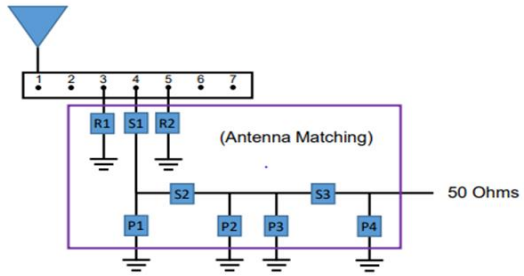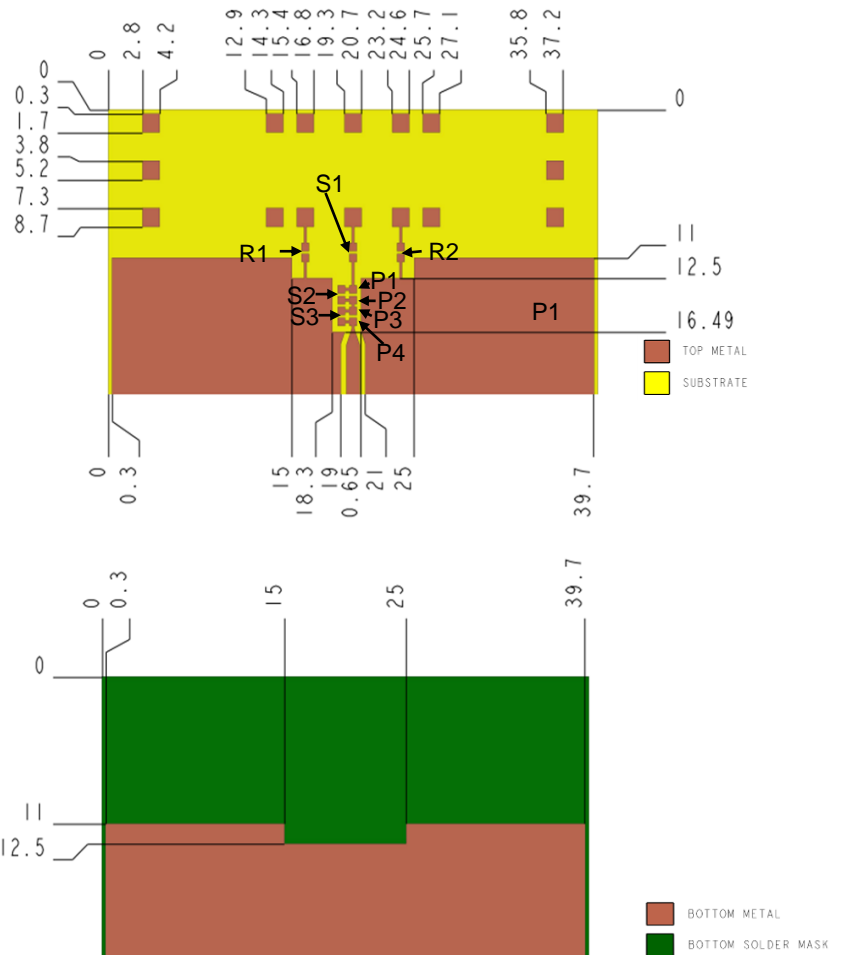


Embedded FR4 LTE-M/ NB-IoT / LPWA Antenna Specifications.
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.


Antenna Demo Board

Demo Board Front View/Back View


Part Number	A	B
P622301-01	60 ± 0.15	40 ± 0.15

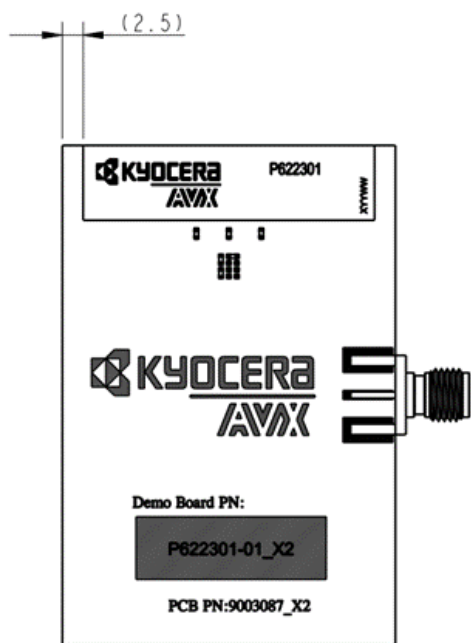

Front View

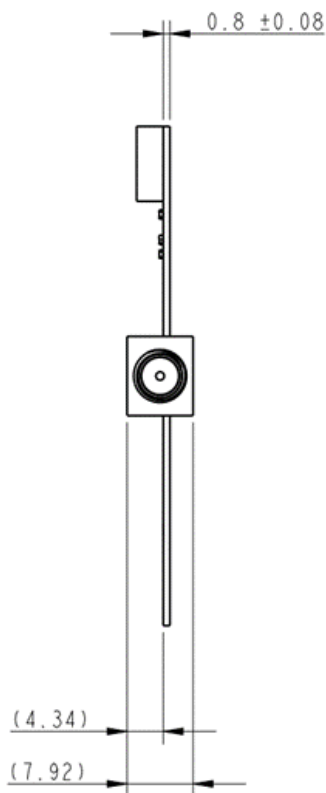

Side View

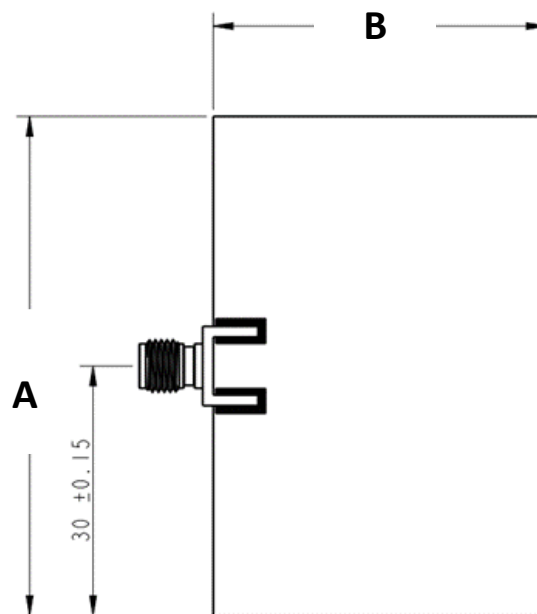


Back View

Embedded FR4 LTE-M/ NB-IoT / LPWA Antenna Specifications.
 KYOCERA AVX produces a wide variety of standard and custom antennas to meet user needs.

Recommended Reflow Soldering Profile

The recommended method for soldering the antenna to the board is forced convection reflow soldering. The following suggestions provide information on how to optimize the reflow process for the FR4 antenna:

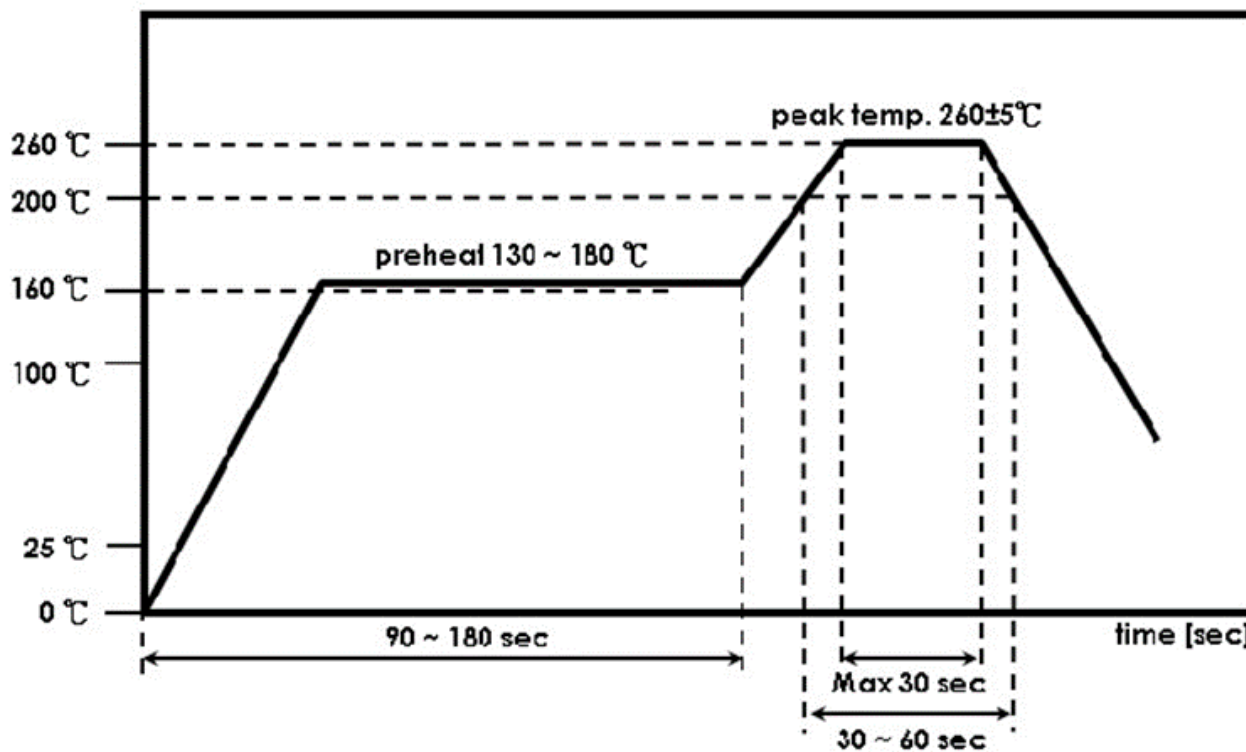

*Adjust the reflow duration to create good solder joints without raising the antenna temperature beyond the allowed maximum of 260° C.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antenna Development Tools](#) category:

Click to view products by [Kyocera AVX](#) manufacturer:

Other Similar products are found below :

[PCSD.06.A](#) [1002427-02](#) [1004796-01](#) [YC0010AAEVB](#) [1001013-02](#) [1005454-01](#) [1004795-01](#) [1002436-01](#) [ACR1004A-EVB](#) [RAC00024-EVB](#) [RAC00245-EVB](#) [ACR1004GC-EVB](#) [W3012-K](#) [W3006-K](#) [SPD.25A](#) [74889100TB](#) [A10192-U1](#) [DTAD.01.A.50](#) [SR4C033-EVB-1](#) [AEK-LTE-CER](#) [IOT-K](#) [SR4W035-EVB-1](#) [W3010-K](#) [LORA-K](#) [ISM-K](#) [REFLECTOR-EVB-1](#) [ACAG0201-2450-EVB](#) [ACAG0301-15752450-EVB](#) [ACAG0301-1575-EVB](#) [ACAG0301-24505500-EVB](#) [ACAG0301-5500-EVB](#) [ACAG0801-2450-EVB](#) [ACAG1204-433-EVB](#) [ACAG1204-868-EVB](#) [ACAG1204-915-EVB](#) [ACAR0301-SW2-EVB](#) [ACAR3005-C2WB-EVB](#) [ACAR3005-S824-EVB](#) [ACAR3705-S698-EVB](#) [ACAR4008-S698-EVB](#) [ACR0301U-EVB](#) [ACR1504I3-EVB-A](#) [ACR1504I3-EVB-S](#) [ACR2005I4-EVB](#) [ACR4006X-EVB](#) [PRO-EB-450](#) [PRO-EB-453](#) [PRO-EB-472](#) [PRO-EB-476](#) [PRO-EB-550](#)