


SEE DETAIL "A"

SECTION A-A




DETAIL "A"
CHAMFER
SCALE=3:1

NOTES: UNLESS OTHERWISE SPECIFIED

1. COSMETIC SPECIFICATION REFER TO WI-QA-038.

NET IMPEDANCE (Z)			
Frequency	300 MHz	500 MHz	1 GHz
Nominal (REF)	120 Ω	145 Ω	170 Ω
Minimum	- Ω	116 Ω	- Ω

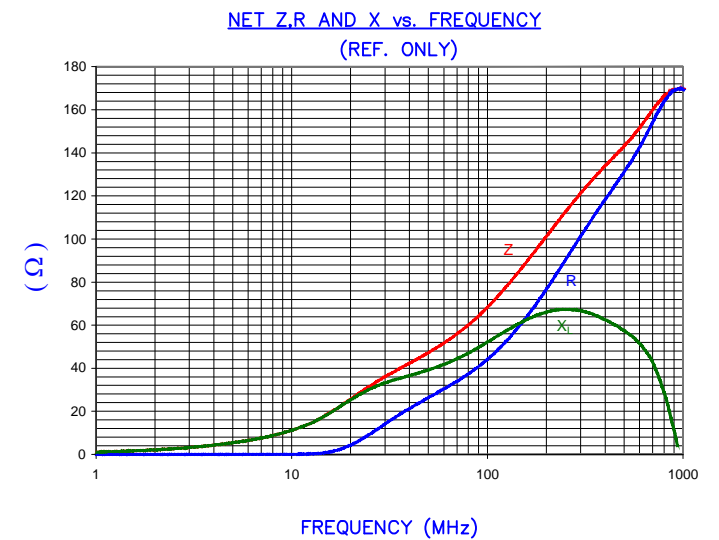

AGILENT E4991A Impedance/Material Analyzer
HP 16092A-Test Fixture

FERRITE CORE DIMENSIONS (SPEC) MM[Inches]:

A	16.00 [.630]	±	0.30 [.012]
B	9.25 [.364]	±	0.20 [.008]
C	19.00 [.748]	±	0.38 [.015]

WEIGHT/1000 12.57 kgs [27.71 Lbs]

SCALE DRAWING 1:1

HFB160093-200



DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.		Laird	
C	UPDATE COMPANY LOGO	01/07/13	QIU	PROJECT/PART NUMBER: HFB160093-200		REV: C	DRAWN BY: JRK
B	UPDATE PRINT FORMAT & Z SPECS	03/26/03	JRK	DATE: 08/23/02	SCALE: 2:1	MATERIAL: HF	
A	ORIGINAL DRAFT	08/23/02	JRK	CAD #	TOOL # B0631		
REV	DESCRIPTION	DATE	INT	HFB160093-200-C			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ferrite Cable Cores](#) category:

Click to view products by [Laird Connectivity](#) manufacturer:

Other Similar products are found below :

[FB73-422](#) [FX28R0984-0](#) [FX28R0984-2](#) [AB 3X2X3SM](#) [2643164251](#) [2643665709](#) [2661626402](#) [28R1127](#) [28R1260](#) [28R1575](#) [SM28R0760](#)
[2631006302](#) [2643165451](#) [2643178351](#) [28R0760](#) [SS7X4X3W](#) [4327 030 16141](#) [2643103102](#) [2643164151](#) [2943666671](#) [2643163851](#)
[28B1101](#) [SM28R1575](#) [2643625902](#) [2643626102](#) [2643480009](#) [2673069901](#) [28B0268-000](#) [28B0375-100](#) [28B0375-300](#) [28B0375-400](#)
[28B0500-100](#) [28B0562-000](#) [28B0562-200](#) [28B0625-100](#) [28B1020-100](#) [28B1417-200](#) [28R1101-000](#) [28R1102-100](#) [28R1127-500](#) [28R0453-](#)
[200](#) [28R0669-000](#) [28R0756-200](#) [28R0480-000](#) [28R1127-000](#) [28R0984-200](#) [28R2170-100](#) [28R0592-010](#) [28R0756-000](#) [28R0984-000](#)