



LED ULTRALITE INDICATORS

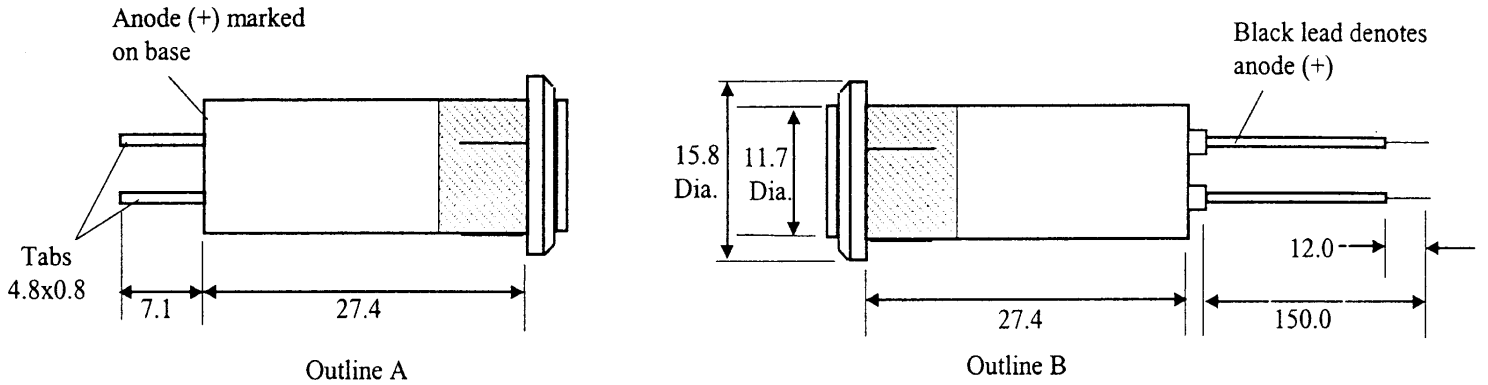


Dimensions in mm

Part Number	Lens Colour	Supply Voltage	Outline
6340001505A	Amber	*Universal	A
6340005505G	Green	*Universal	A
6340002505R	Red	*Universal	A
6340301505A	Amber	*Universal	B
6340305505G	Green	*Universal	B
6340302505R	Red	*Universal	B
6342001505A	Amber	5V dc	A
6342005505G	Green	5V dc	A
6342002505R	Red	5V dc	A
6346001505A	Amber	28V dc	A
6346005505G	Green	28V dc	A
6346002505R	Red	28V dc	A

* Externally connected current limiting resistor and diode (for ac supplies) required
Current should be limited to 30mA max.

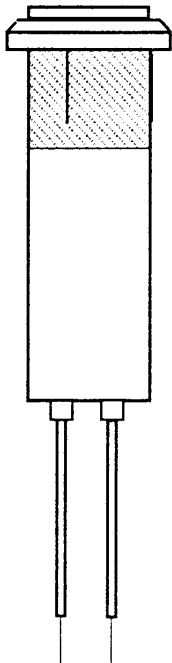

- * 4.8mm tabs or flying leads
- * 12.7mm panel cut-out required
- * Indicators are push fit or use mounting clip type 217-910-19
- * Long (LED) life operation
- * 85° C temperature rating
- * Other lead lengths and special terminations can be provided subject to minimum order requirements - please enquire for further details
- * A range of matching 230V Neon Ultralite indicators is also available

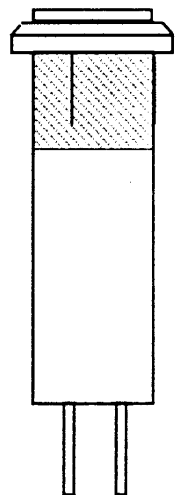

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [cml manufacturer](#):

Other Similar products are found below :

[1860623W3A](#) [19010351](#) [19300133](#) [192A0255](#) [19211252](#) [19050253](#) [19241354](#) [195A1350](#) [SK-3-2500](#) [6346002505R](#) [6275AL](#) [19041051](#)
[19010053](#) [19180351](#) [1862623W3A](#) [19272351](#) [19040351](#) [19051357](#) [19050357](#) [19010350](#) [19000352](#) [T000205](#) [1860325W3D](#) [19000353](#) [SK-](#)
[2-2500](#) [19410132M](#) [19050257](#) [192A1355](#) [7632](#) [18600M51](#) [19210363](#) [19272350](#) [1512145UR3](#) [T000015](#) [1927235WA](#) [190403Z2](#) [19211253](#)
[19740135](#) [192D0000](#) [192D0230](#) [1860245W3](#) [W643](#) [19272352](#) [19080350](#) [190A2351](#) [18606232](#) [19TR0I24](#) [1512135UG3](#) [T010309](#)
[19031253](#)