

Dual Bias Resistor Transistors

NPN and PNP Silicon Surface Mount


Transistors with Monolithic Bias

Resistor Network

LMUN5311DW1T1G Series
S-LMUN5311DW1T1G Series

The BRT (Bias Resistor Transistor) contains a single transistor with a monolithic bias network consisting of two resistors; a series base resistor and a base-emitter resistor. These digital transistors are designed to replace a single device and its external resistor bias network. The BRT eliminates these individual components by integrating them into a single device. In the LMUN5311DW1T1G series, two complementary BRT devices are housed in the SOT-363 package which is ideal for low power surface mount applications where board space is at a premium.


- Simplifies Circuit Design
- Reduces Board Space
- Reduces Component Count
- We declare that the material of product compliance with RoHS requirements and Halogen Free.
- S- prefix for automotive and other applications requiring unique site and control change requirements; AEC-Q101 qualified and PPAP capable.



MAXIMUM RATINGS (T_A = 25°C unless otherwise noted, common for Q₁

and Q₂, – minus sign for Q₁ (PNP omitted)


| Rating | Symbol | Value | Unit |
|---------------------------|------------------|-------|------|
| Collector-Base Voltage | V _{CBO} | 50 | Vdc |
| Collector-Emitter Voltage | V _{CEO} | 50 | Vdc |
| Collector Current | I _C | 100 | mAdc |



THERMAL CHARACTERISTICS

| Characteristic (One Junction Heated) | Symbol | Max | Unit |
|---|-----------------------------------|--------------------------------|-------|
| Total Device Dissipation T _A = 25°C | P _D | 187 (Note 1.) 256 (Note 2.) | mW |
| Derate above 25°C | | 1.5 (Note 1.) 2.0 (Note 2.) | mW/°C |
| Thermal Resistance – Junction-to-Ambient | R _{θJA} | 670 (Note 1.) 490 (Note 2.) | °C/W |
| Characteristic (Both Junctions Heated) | Symbol | Max | Unit |
| Total Device Dissipation T _A = 25°C | P _D | 250 (Note 1.) 385 (Note 2.) | mW |
| Derate above 25°C | | 2.0 (Note 1.) 3.0 (Note 2.) | mW/°C |
| Thermal Resistance – Junction-to-Ambient | R _{θJA} | 493 (Note 1.) 325 (Note 2.) | °C/W |
| Thermal Resistance – Junction-to-Lead | R _{θJL} | 188 (Note 1.) 208 (Note 2.) | °C/W |
| Junction and Storage Temperature | T _J , T _{stg} | -55 to +150 | °C |

MARKING DIAGRAM

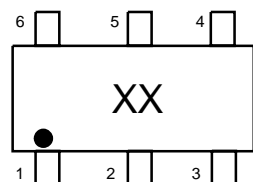

xx = Device Marking
(See Page 2)

DEVICE MARKING INFORMATION

See specific marking information in the device marking table on page 2 of this data sheet.

LMUN5311DW1T1G Series S-LMUN5311DW1T1G Series

ORDERING, SHIPPING, DEVICE MARKING AND RESISTOR VALUES

| Device | Package | Marking | R1(K) | R2(K) | Shipping |
|----------------|---------|---------|-------|-------|-----------------|
| LMUN5311DW1T1G | SOT-363 | 11 | 10 | 10 | 3000/Tape&Reel |
| LMUN5311DW1T3G | SOT-363 | 11 | 10 | 10 | 10000/Tape&Reel |
| LMUN5312DW1T1G | SOT-363 | 12 | 22 | 22 | 3000/Tape&Reel |
| LMUN5312DW1T3G | SOT-363 | 12 | 22 | 22 | 10000/Tape&Reel |
| LMUN5313DW1T1G | SOT-363 | 13 | 47 | 47 | 3000/Tape&Reel |
| LMUN5313DW1T3G | SOT-363 | 13 | 47 | 47 | 10000/Tape&Reel |
| LMUN5314DW1T1G | SOT-363 | 14 | 10 | 47 | 3000/Tape&Reel |
| LMUN5314DW1T3G | SOT-363 | 14 | 10 | 47 | 10000/Tape&Reel |
| LMUN5315DW1T1G | SOT-363 | 15 | 10 | ∞ | 3000/Tape&Reel |
| LMUN5315DW1T3G | SOT-363 | 15 | 10 | ∞ | 10000/Tape&Reel |
| LMUN5316DW1T1G | SOT-363 | 16 | 4.7 | ∞ | 3000/Tape&Reel |
| LMUN5316DW1T3G | SOT-363 | 16 | 4.7 | ∞ | 10000/Tape&Reel |
| LMUN5330DW1T1G | SOT-363 | 30 | 1 | 1 | 3000/Tape&Reel |
| LMUN5330DW1T3G | SOT-363 | 30 | 1 | 1 | 10000/Tape&Reel |
| LMUN5331DW1T1G | SOT-363 | 31 | 2.2 | 2.2 | 3000/Tape&Reel |
| LMUN5331DW1T3G | SOT-363 | 31 | 2.2 | 2.2 | 10000/Tape&Reel |
| LMUN5332DW1T1G | SOT-363 | 32 | 4.7 | 4.7 | 3000/Tape&Reel |
| LMUN5332DW1T3G | SOT-363 | 32 | 4.7 | 4.7 | 10000/Tape&Reel |
| LMUN5333DW1T1G | SOT-363 | 33 | 4.7 | 47 | 3000/Tape&Reel |
| LMUN5333DW1T3G | SOT-363 | 33 | 4.7 | 47 | 10000/Tape&Reel |
| LMUN5334DW1T1G | SOT-363 | 34 | 22 | 47 | 3000/Tape&Reel |
| LMUN5334DW1T3G | SOT-363 | 34 | 22 | 47 | 10000/Tape&Reel |
| LMUN5335DW1T1G | SOT-363 | 35 | 2.2 | 47 | 3000/Tape&Reel |
| LMUN5335DW1T3G | SOT-363 | 35 | 2.2 | 47 | 10000/Tape&Reel |

LMUN5311DW1T1G Series S-LMUN5311DW1T1G Series

ELECTRICAL CHARACTERISTICS

(T_A = 25°C unless otherwise noted, common for Q₁ and Q₂, – minus sign for Q₁ (PNP) omitted) (Continued)

| Characteristic | Symbol | Min | Typ | Max | Unit | |
|---|---|----------------------|--|---|---|-----|
| ON CHARACTERISTICS (Note 4) | | | | | | |
| DC Current Gain (V _{CE} = 10 V, I _C = 5.0 mA) | LMUN5311DW1T1G LMUN5312DW1T1G LMUN5313DW1T1G LMUN5314DW1T1G LMUN5315DW1T1G LMUN5316DW1T1G LMUN5330DW1T1G LMUN5331DW1T1G LMUN5332DW1T1G LMUN5333DW1T1G LMUN5334DW1T1G LMUN5335DW1T1G | h _{FE} | 35 60 80 80 160 160 3.0 8.0 15 80 80 80 | 60 100 140 140 350 350 5.0 15 30 200 150 140 | – – – – – – – – – – – – | |
| Collector-Emitter Saturation Voltage (I _C = 10 mA, I _B = 0.3 mA) (I _C = 10 mA, I _B = 5 mA) LMUN5330DW1T1G/LMUN5331DW1T1G (I _C = 10 mA, I _B = 1 mA) LMUN5315DW1T1G/LMUN5316DW1T1G LMUN5332DW1T1G/LMUN5333DW1T1G/LMUN5334DW1T1G | | V _{CE(sat)} | – | – | 0.25 | Vdc |
| Output Voltage (on) (V _{CC} = 5.0 V, V _B = 2.5 V, R _L = 1.0 kΩ) | LMUN5311DW1T1G LMUN5312DW1T1G LMUN5314DW1T1G LMUN5315DW1T1G LMUN5316DW1T1G LMUN5330DW1T1G LMUN5331DW1T1G LMUN5332DW1T1G LMUN5333DW1T1G LMUN5334DW1T1G LMUN5335DW1T1G (V _{CC} = 5.0 V, V _B = 3.5 V, R _L = 1.0 kΩ) LMUN5313DW1T1G | V _{OL} | – – – – – – – – – – – – – | – – – – – – – – – – – – – | 0.2 0.2 0.2 0.2 0.2 0.2 0.2 0.2 0.2 0.2 0.2 0.2 | Vdc |
| Output Voltage (off) (V _{CC} = 5.0 V, V _B = 0.5 V, R _L = 1.0 kΩ) (V _{CC} = 5.0 V, V _B = 0.050 V, R _L = 1.0 kΩ) LMUN5330DW1T1G (V _{CC} = 5.0 V, V _B = 0.25 V, R _L = 1.0 kΩ) LMUN5315DW1T1G LMUN5316DW1T1G LMUN5333DW1T1G | | V _{OH} | 4.9 | – | – | Vdc |
| Input Resistor | LMUN5311DW1T1G LMUN5312DW1T1G LMUN5313DW1T1G LMUN5314DW1T1G LMUN5315DW1T1G LMUN5316DW1T1G LMUN5330DW1T1G LMUN5331DW1T1G LMUN5332DW1T1G LMUN5333DW1T1G LMUN5334DW1T1G LMUN5335DW1T1G | R1 | 7.0 15.4 32.9 7.0 7.0 3.3 0.7 1.5 3.3 3.3 15.4 1.54 | 10 22 47 10 10 4.7 1.0 2.2 4.7 4.7 22 2.2 | 13 28.6 61.1 13 13 6.1 1.3 2.9 6.1 6.1 28.6 2.86 | k Ω |
| Resistor Ratio | LMUN5311DW1T1G/LMUN5312DW1T1G/LMUN5313DW1T1G LMUN5314DW1T1G LMUN5315DW1T1G/LMUN5316DW1T1G LMUN5330DW1T1G/LMUN5331DW1T1G/LMUN5332DW1T1G LMUN5333DW1T1G LMUN5334DW1T1G LMUN5335DW1T1G | R1/R2 | 0.8 0.17 – 0.8 0.055 0.38 0.038 | 1.0 0.21 – 1.0 0.1 0.47 0.047 | 1.2 0.25 – 1.2 0.185 0.56 0.056 | |

4. Pulse Test: Pulse Width < 300 μs, Duty Cycle < 2.0%

LMUN5311DW1T1G Series S-LMUN5311DW1T1G Series

ELECTRICAL CHARACTERISTICS

($T_A = 25^\circ\text{C}$ unless otherwise noted, common for Q_1 and Q_2 , – minus sign for Q_1 (PNP) omitted)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|---|----------------|-----|-----|------|------|
| OFF CHARACTERISTICS | | | | | |
| Collector-Base Cutoff Current ($V_{CB} = 50\text{ V}, I_E = 0$) | I_{CBO} | – | – | 100 | nAdc |
| Collector-Emitter Cutoff Current ($V_{CE} = 50\text{ V}, I_B = 0$) | I_{CEO} | – | – | 500 | nAdc |
| Emitter-Base Cutoff Current ($V_{EB} = 6.0\text{ V}, I_C = 0$) | LMUN5311DW1T1G | – | – | 0.5 | mAdc |
| | LMUN5312DW1T1G | – | – | 0.2 | |
| | LMUN5313DW1T1G | – | – | 0.1 | |
| | LMUN5314DW1T1G | – | – | 0.2 | |
| | LMUN5315DW1T1G | – | – | 0.9 | |
| | LMUN5316DW1T1G | – | – | 1.9 | |
| | LMUN5330DW1T1G | – | – | 4.3 | |
| | LMUN5331DW1T1G | – | – | 2.3 | |
| | LMUN5332DW1T1G | – | – | 1.5 | |
| | LMUN5333DW1T1G | – | – | 0.18 | |
| | LMUN5334DW1T1G | – | – | 0.13 | |
| LMUN5335DW1T1G | – | – | 0.2 | | |
| Collector-Base Breakdown Voltage ($I_C = 10\ \mu\text{A}, I_E = 0$) | $V_{(BR)CBO}$ | 50 | – | – | Vdc |
| Collector-Emitter Breakdown Voltage (Note 3) ($I_C = 2.0\text{ mA}, I_B = 0$) | $V_{(BR)CEO}$ | 50 | – | – | Vdc |

3. Pulse Test: Pulse Width < 300 μs , Duty Cycle < 2.0%

ALL LMUN5311DW1T1G SERIES DEVICES

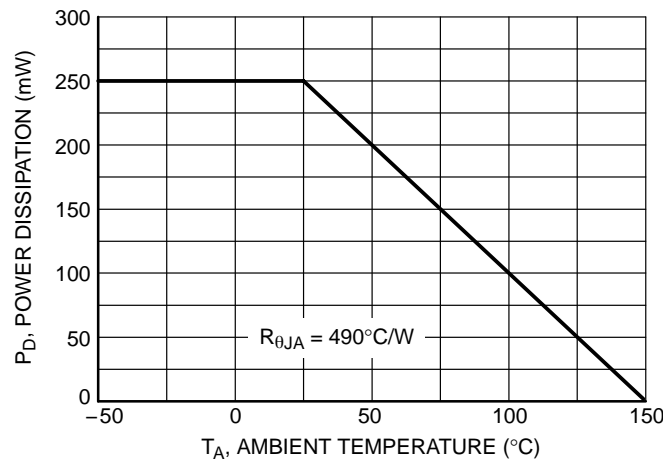


Figure 1. Derating Curve

LMUN5311DW1T1G Series S-LMUN5311DW1T1G Series

TYPICAL ELECTRICAL CHARACTERISTICS – LMUN5311DW1T1G NPN TRANSISTOR

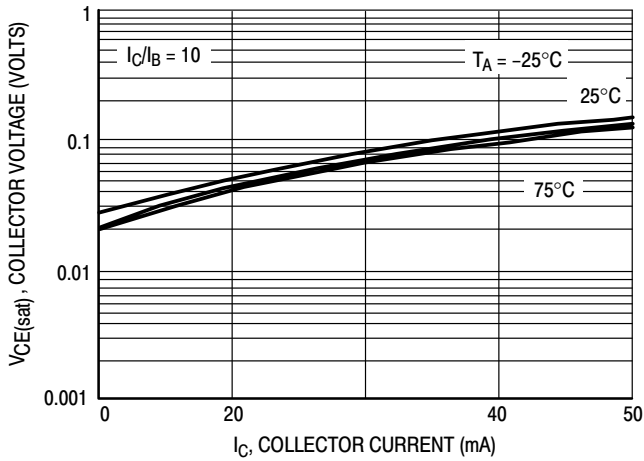


Figure 2. $V_{CE(sat)}$ versus I_C

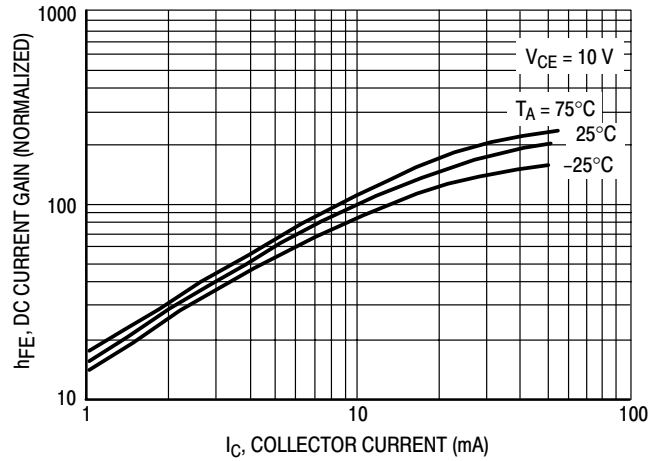


Figure 3. DC Current Gain

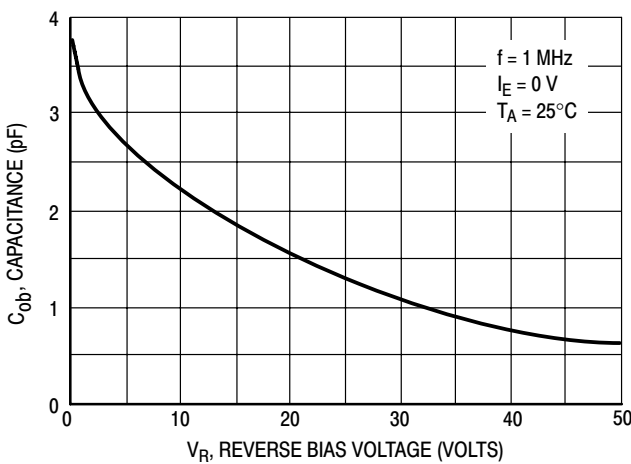


Figure 4. Output Capacitance

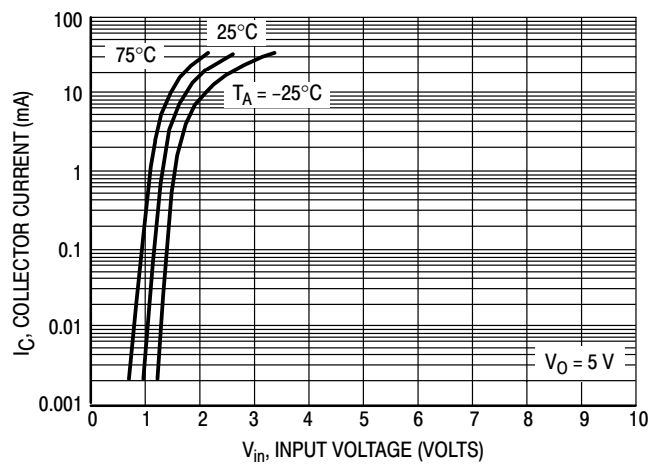


Figure 5. Output Current versus Input Voltage

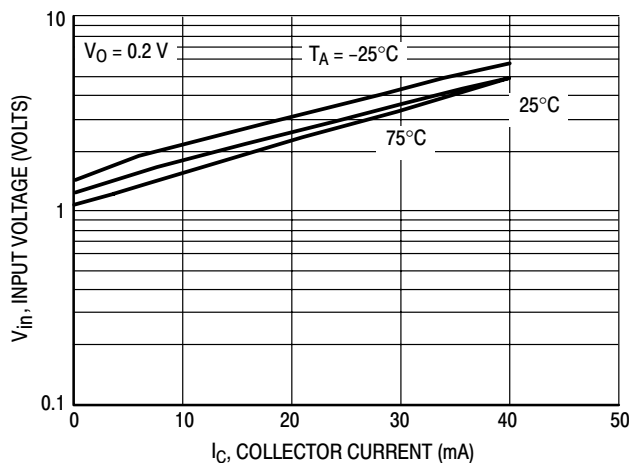


Figure 6. Input Voltage versus Output Current

LMUN5311DW1T1G Series S-LMUN5311DW1T1G Series

TYPICAL ELECTRICAL CHARACTERISTICS – LMUN5311DW1T1G PNP TRANSISTOR

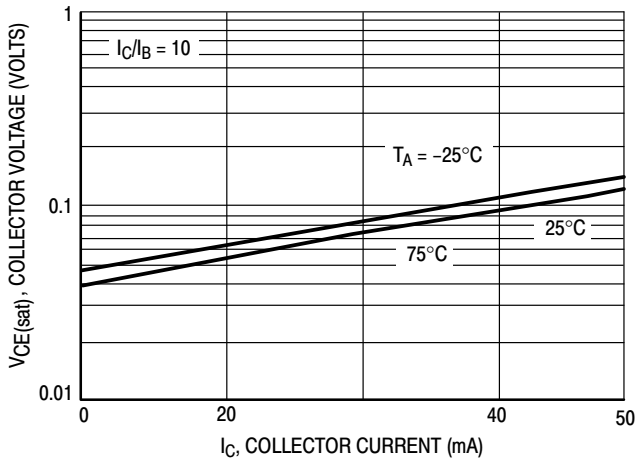


Figure 7. $V_{CE(sat)}$ versus I_C

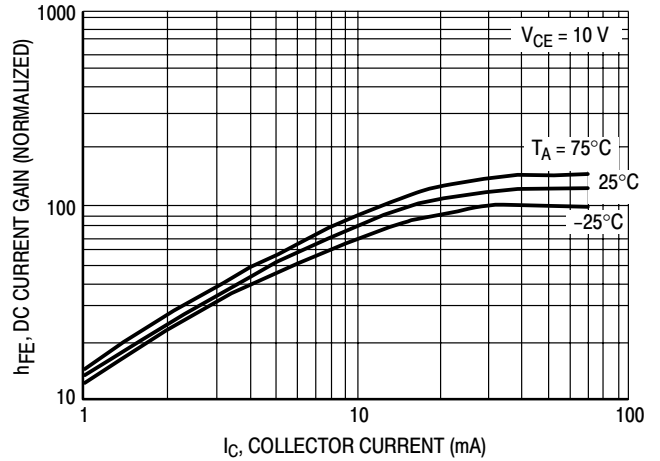


Figure 8. DC Current Gain

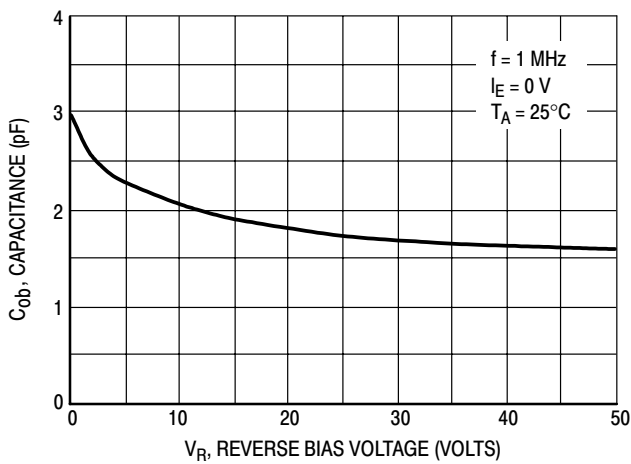


Figure 9. Output Capacitance

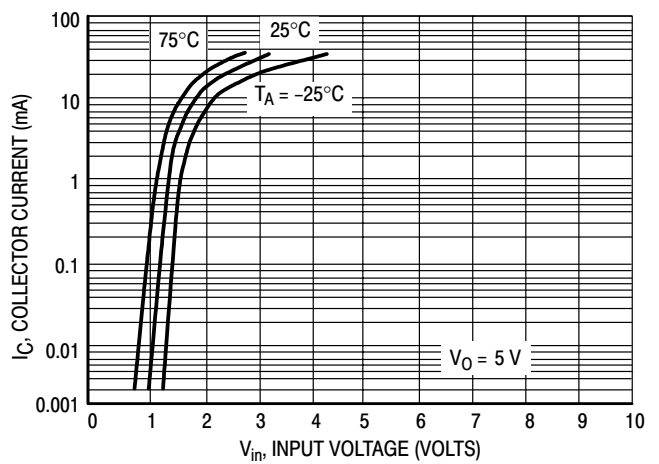


Figure 10. Output Current versus Input Voltage

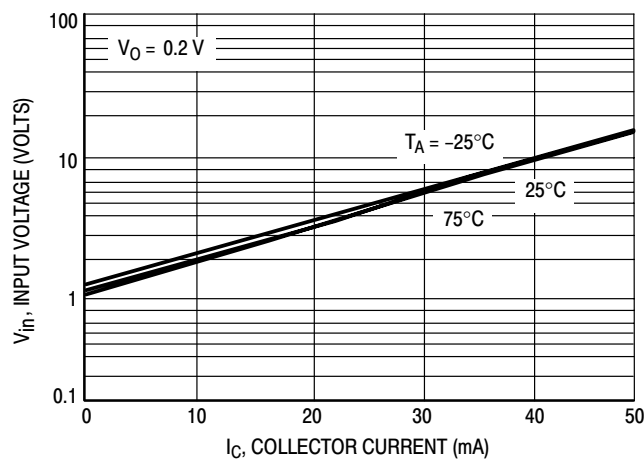


Figure 11. Input Voltage versus Output Current

LMUN5311DW1T1G Series S-LMUN5311DW1T1G Series

TYPICAL ELECTRICAL CHARACTERISTICS – LMUN5312DW1T1G NPN TRANSISTOR

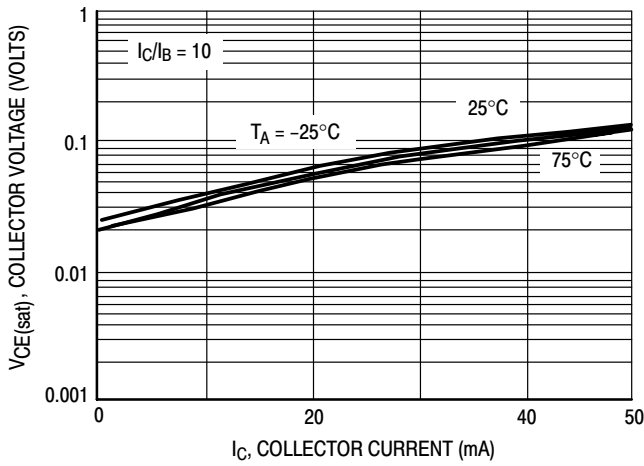


Figure 12. $V_{CE(sat)}$ versus I_C

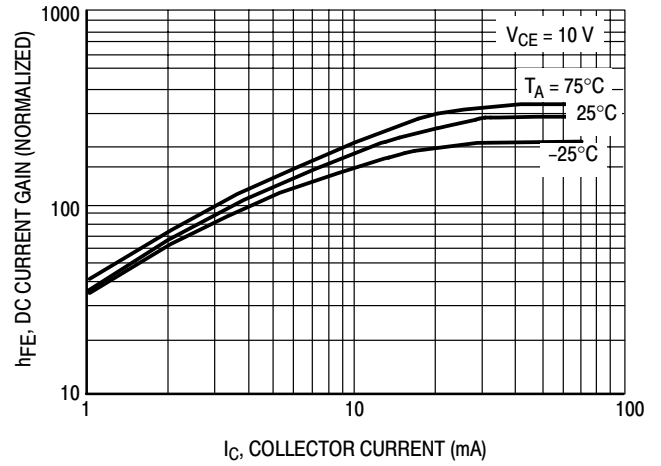


Figure 13. DC Current Gain

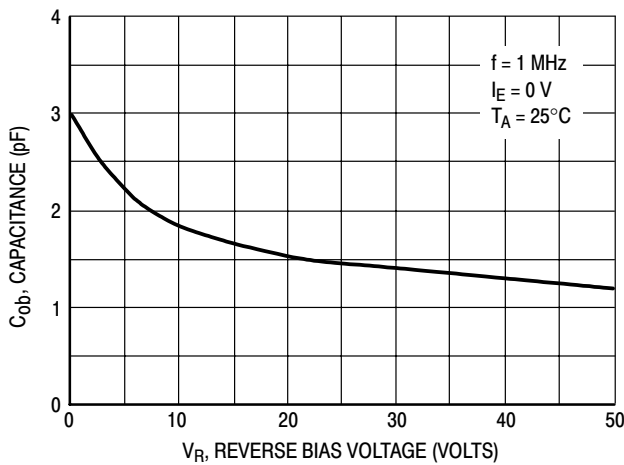


Figure 14. Output Capacitance

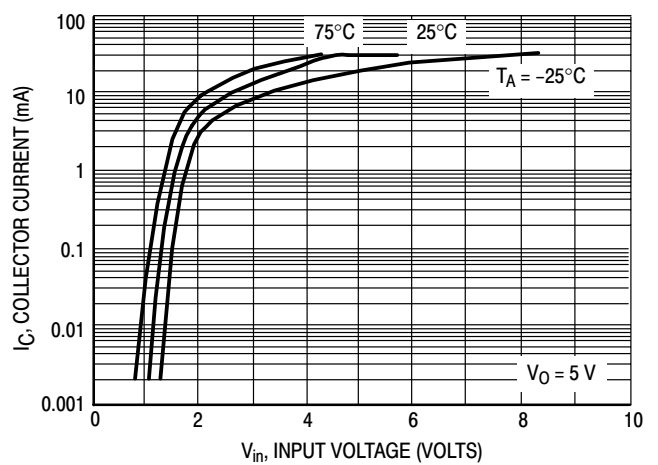


Figure 15. Output Current versus Input Voltage

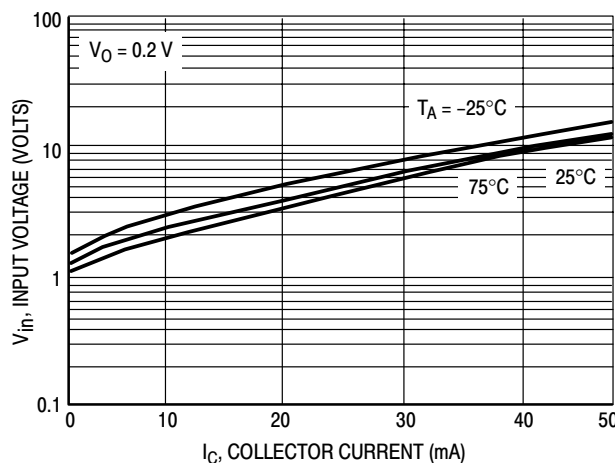


Figure 16. Input Voltage versus Output Current

TYPICAL ELECTRICAL CHARACTERISTICS – LMUN5312DW1T1G PNP TRANSISTOR

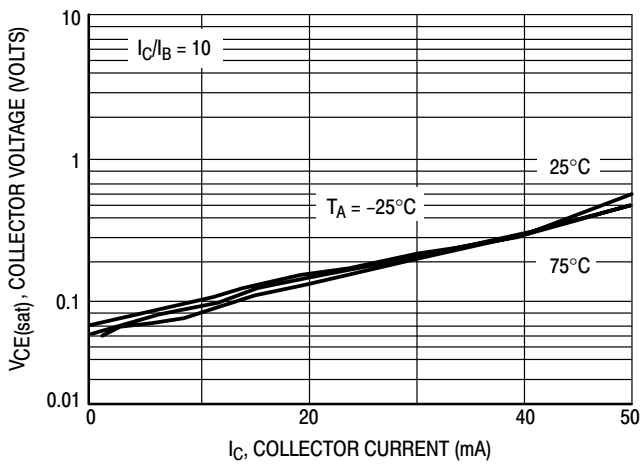


Figure 17. $V_{CE(sat)}$ versus I_C

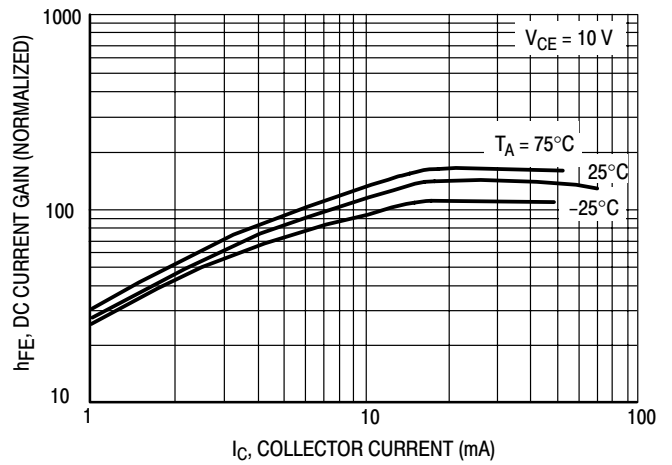


Figure 18. DC Current Gain

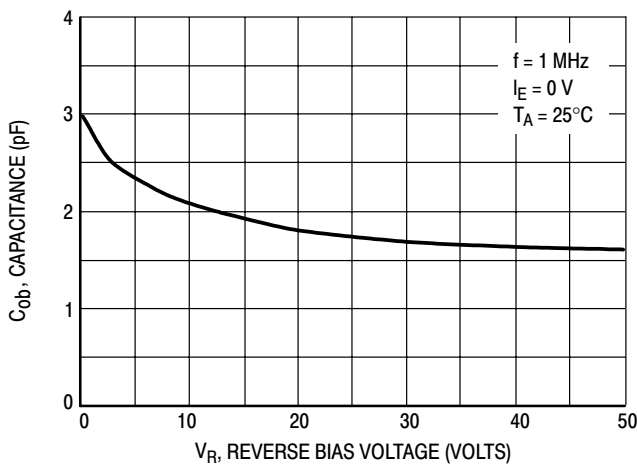


Figure 19. Output Capacitance

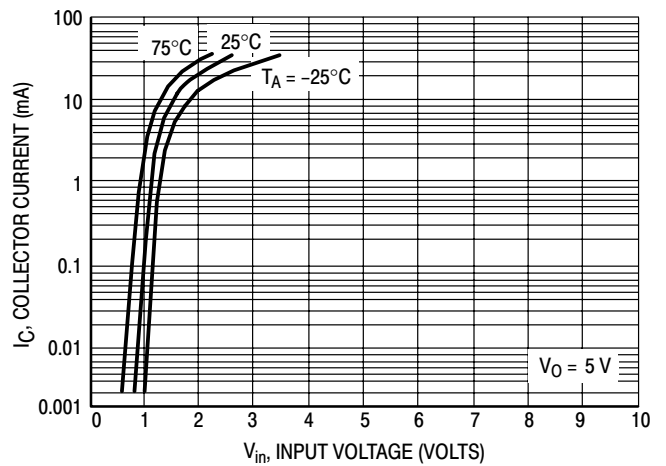


Figure 20. Output Current versus Input Voltage

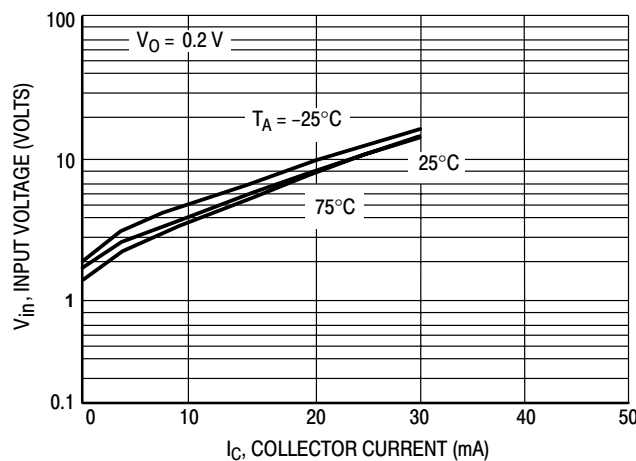


Figure 21. Input Voltage versus Output Current

LMUN5311DW1T1G Series S-LMUN5311DW1T1G Series

TYPICAL ELECTRICAL CHARACTERISTICS – LMUN5313DW1T1G NPN TRANSISTOR

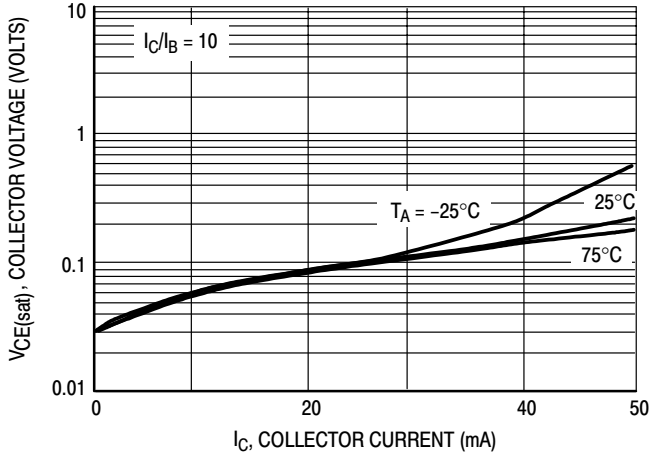


Figure 22. $V_{CE(sat)}$ versus I_C

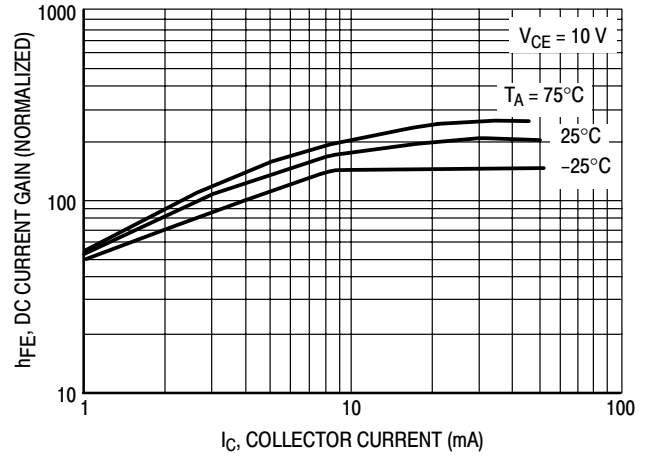


Figure 23. DC Current Gain

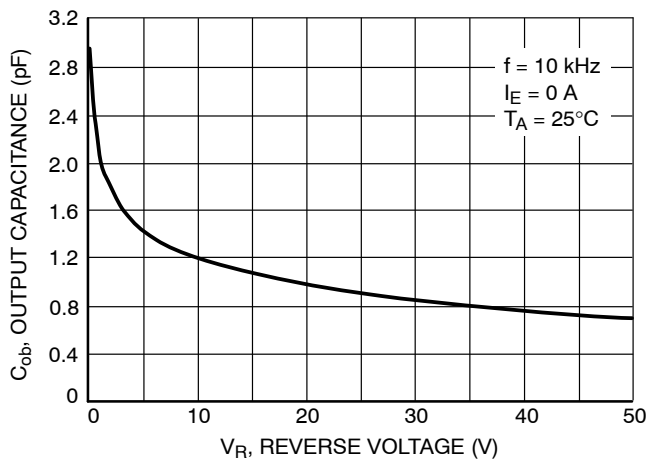


Figure 24. Output Capacitance

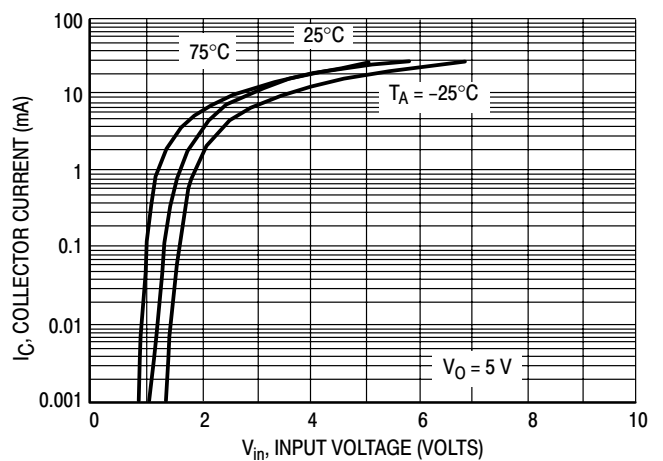


Figure 25. Output Current versus Input Voltage

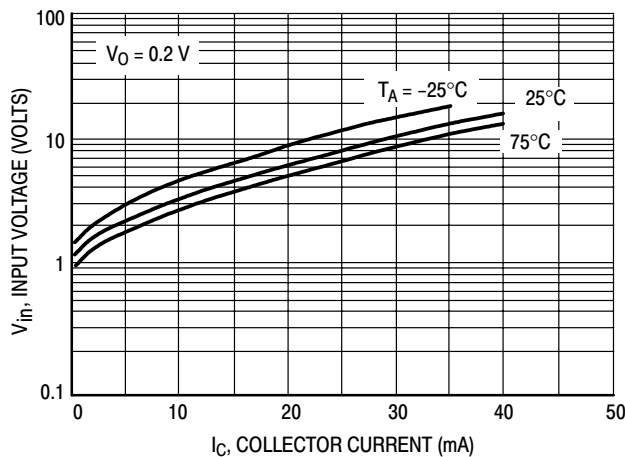


Figure 26. Input Voltage versus Output Current

LMUN5311DW1T1G Series S-LMUN5311DW1T1G Series

TYPICAL ELECTRICAL CHARACTERISTICS – LMUN5313DW1T1G PNP TRANSISTOR

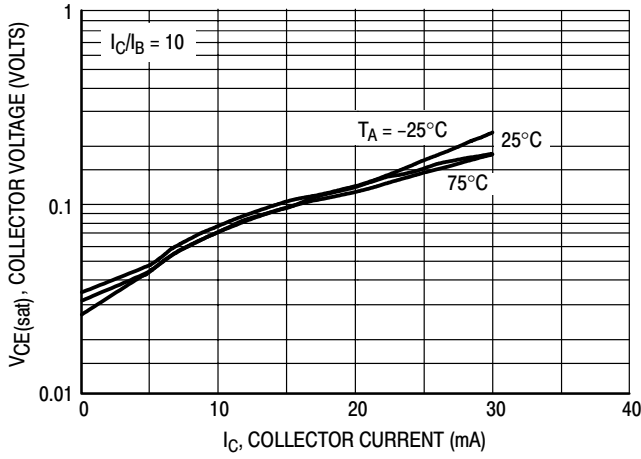


Figure 27. $V_{CE(sat)}$ versus I_C

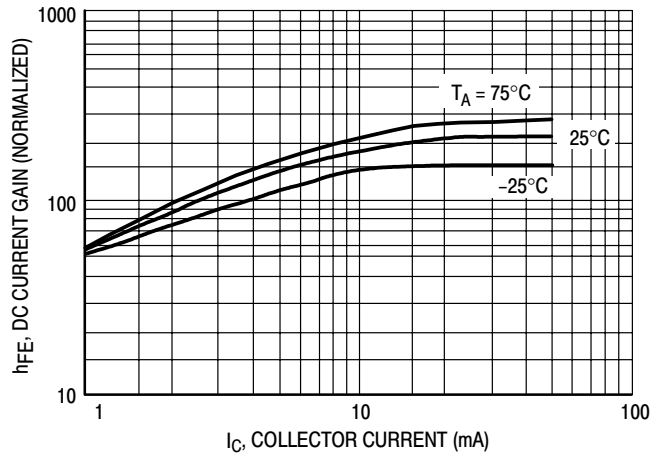


Figure 28. DC Current Gain

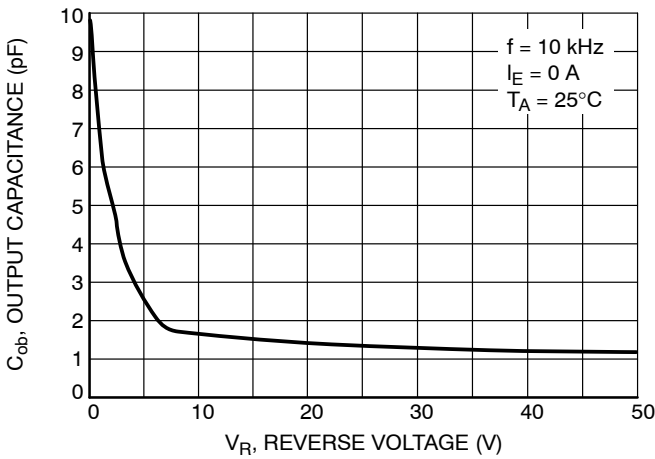


Figure 29. Output Capacitance

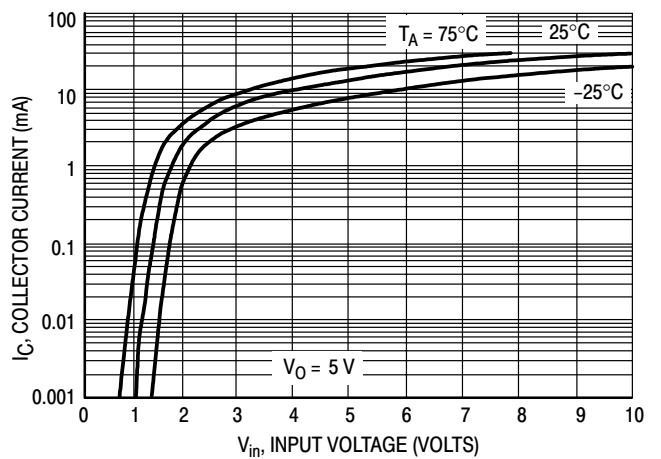


Figure 30. Output Current versus Input Voltage

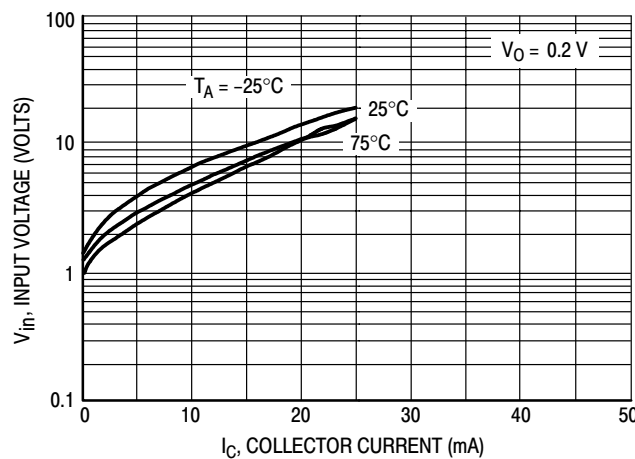


Figure 31. Input Voltage versus Output Current

LMUN5311DW1T1G Series S-LMUN5311DW1T1G Series

TYPICAL ELECTRICAL CHARACTERISTICS – LMUN5314DW1T1G NPN TRANSISTOR

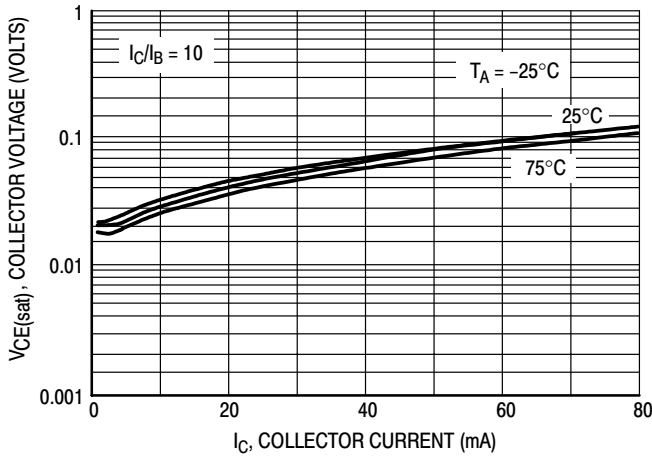


Figure 32. $V_{CE(sat)}$ versus I_C

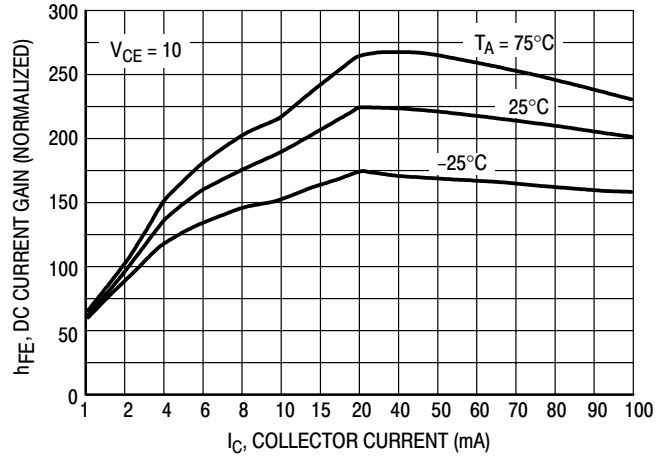


Figure 33. DC Current Gain

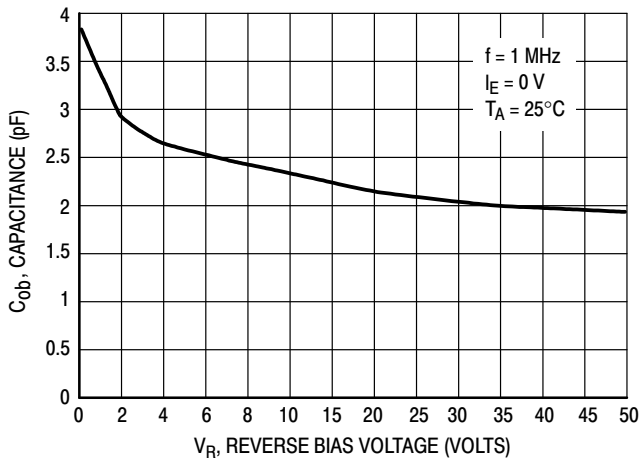


Figure 34. Output Capacitance

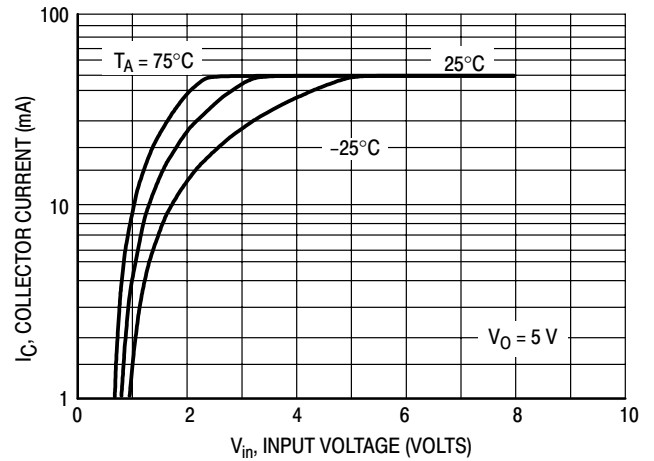


Figure 35. Output Current versus Input Voltage

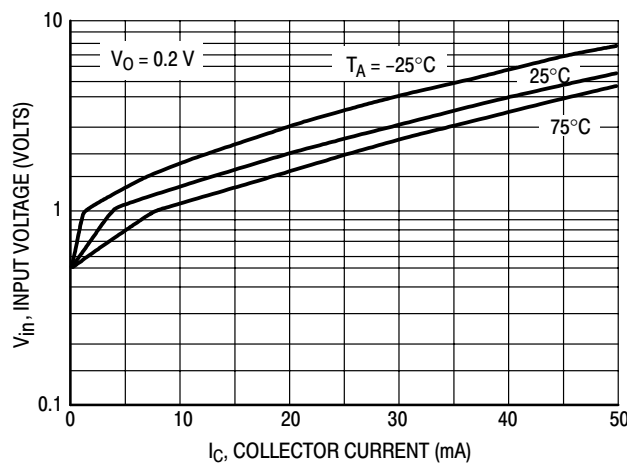


Figure 36. Input Voltage versus Output Current

LMUN5311DW1T1G Series S-LMUN5311DW1T1G Series

TYPICAL ELECTRICAL CHARACTERISTICS – LMUN5314DW1T1G PNP TRANSISTOR

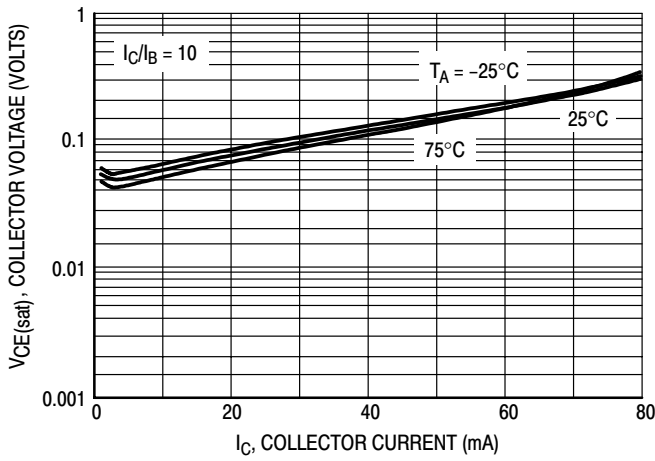


Figure 37. $V_{CE(sat)}$ versus I_C

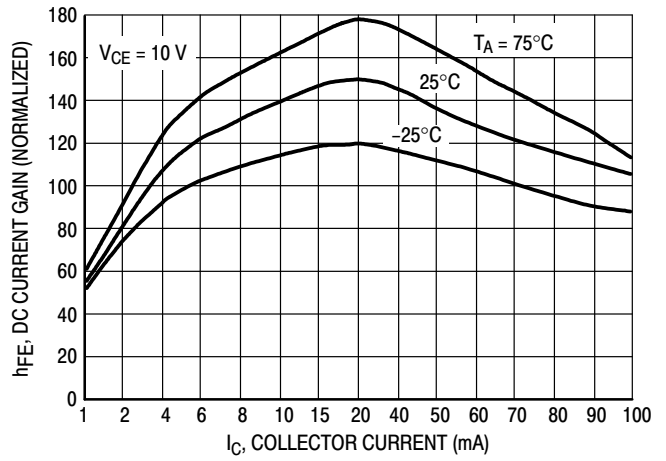


Figure 38. DC Current Gain

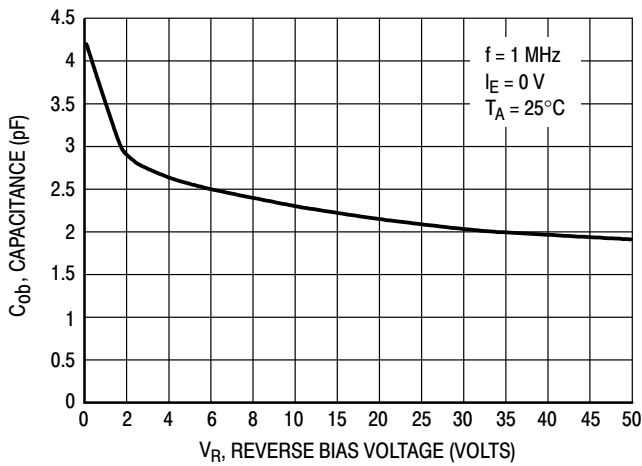


Figure 39. Output Capacitance

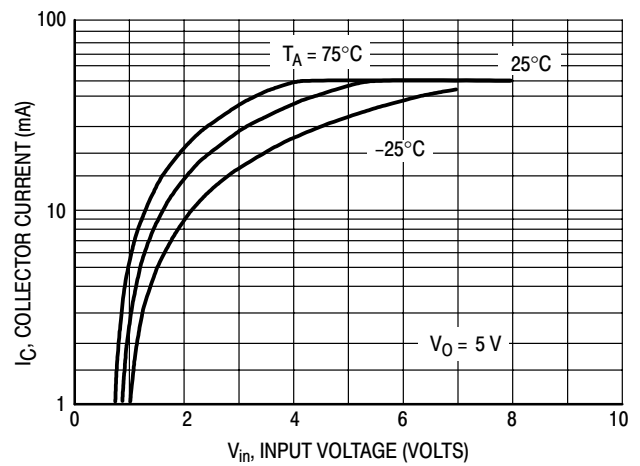


Figure 40. Output Current versus Input Voltage

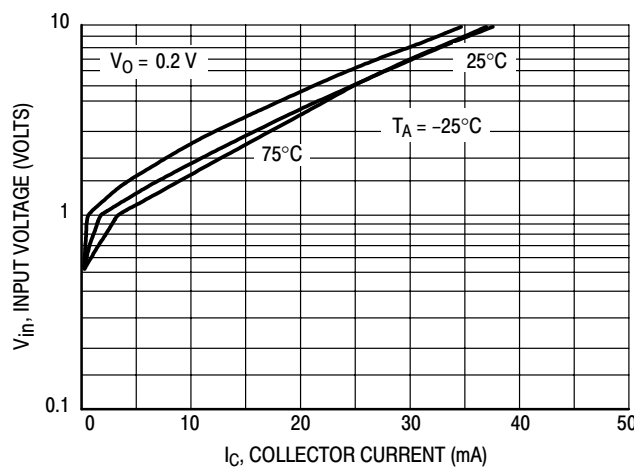


Figure 41. Input Voltage versus Output Current

LMUN5311DW1T1G Series S-LMUN5311DW1T1G Series

TYPICAL ELECTRICAL CHARACTERISTICS — LMUN5315DW1T1G NPN TRANSISTOR

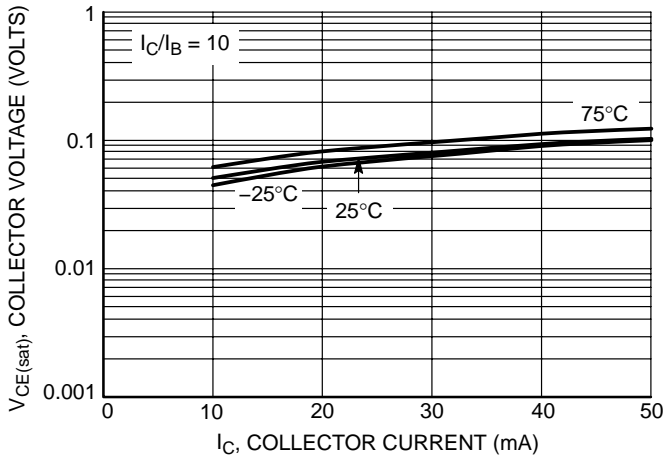


Figure 42. $V_{CE(sat)}$ versus I_C

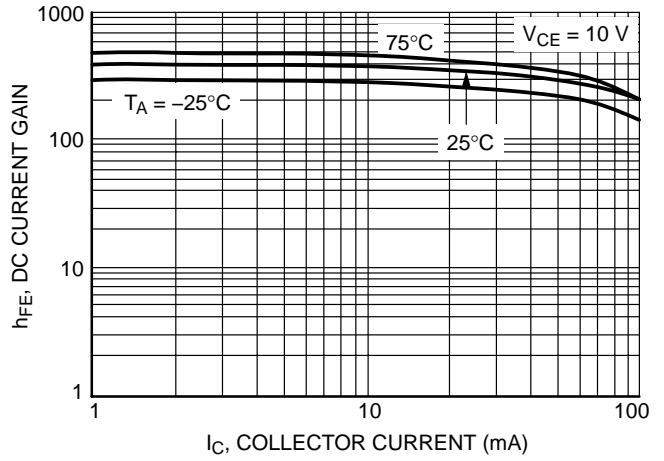


Figure 43. DC Current Gain

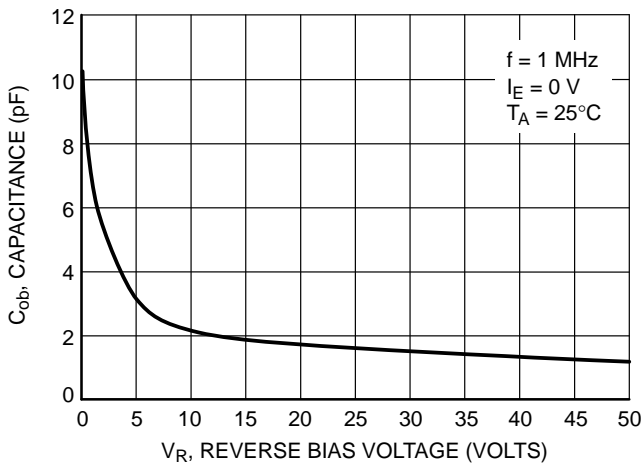


Figure 44. Output Capacitance

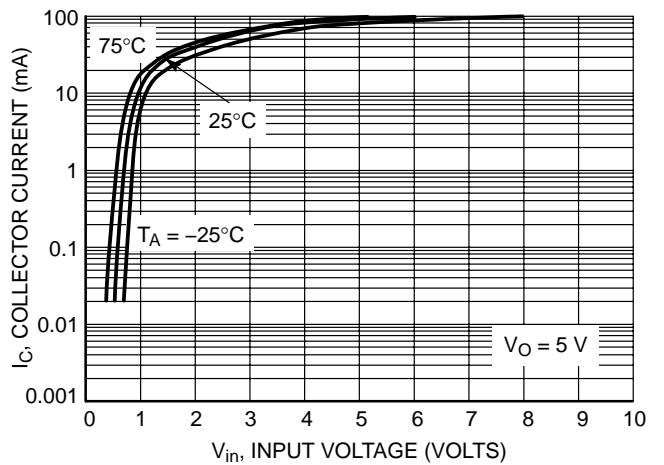


Figure 45. Output Current versus Input Voltage

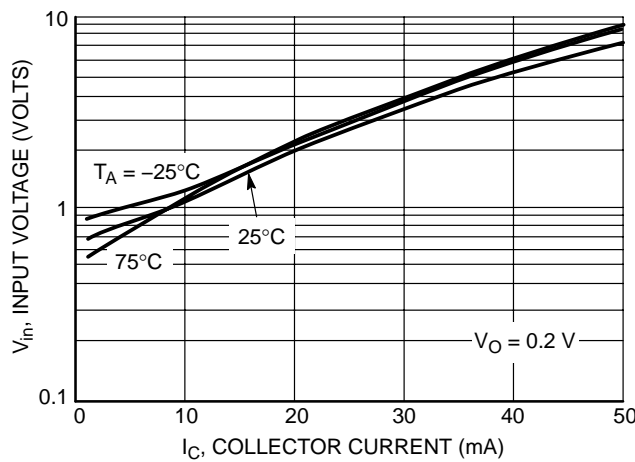


Figure 46. Input Voltage versus Output Current

LMUN5311DW1T1G Series S-LMUN5311DW1T1G Series

TYPICAL ELECTRICAL CHARACTERISTICS — LMUN5315DW1T1G PNP TRANSISTOR

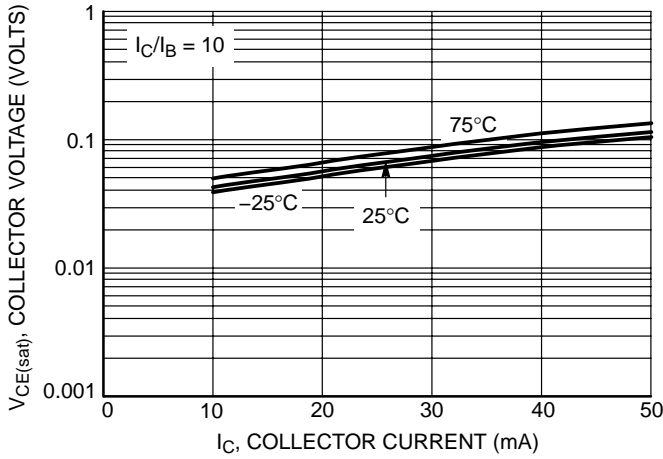


Figure 47. $V_{CE(sat)}$ versus I_C

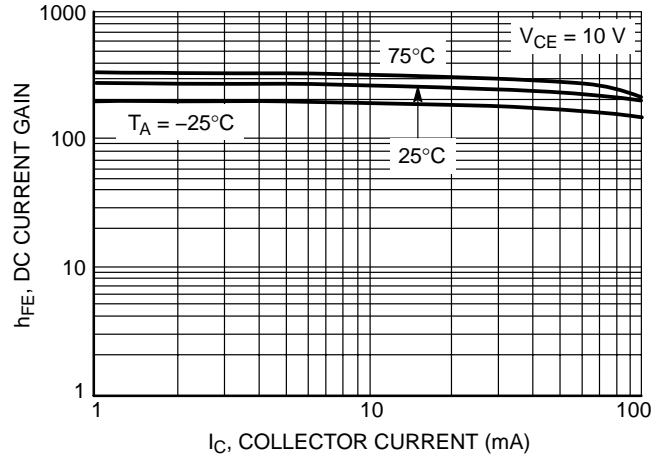


Figure 48. DC Current Gain

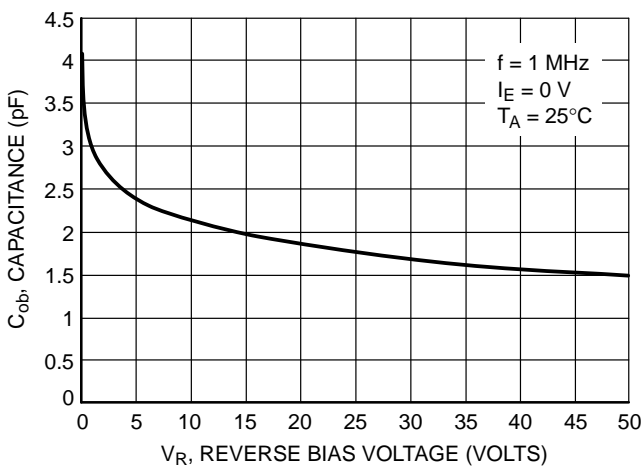


Figure 49. Output Capacitance

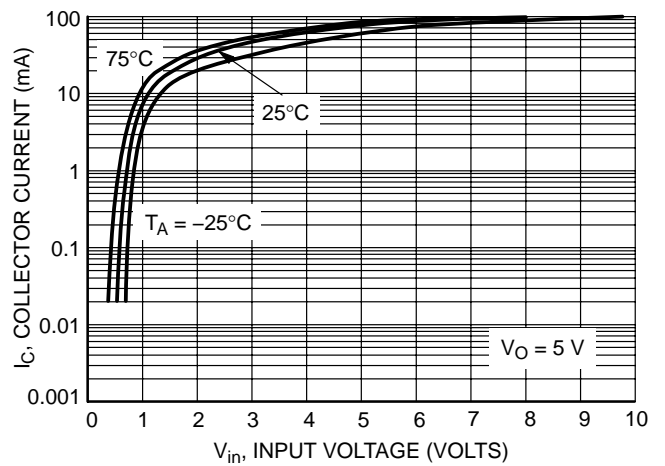


Figure 50. Output Current versus Input Voltage

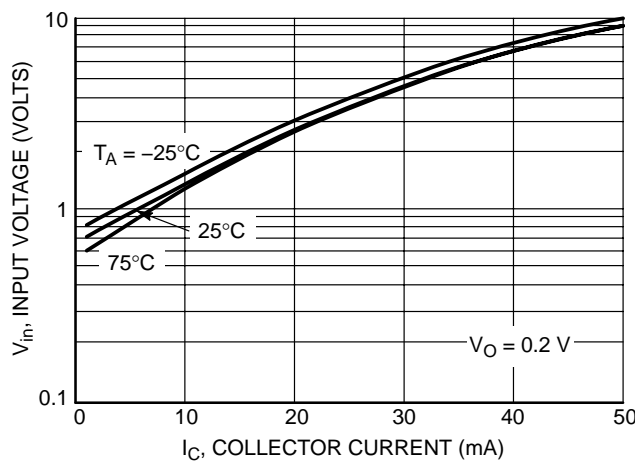


Figure 51. Input Voltage versus Output Current

LMUN5311DW1T1G Series S-LMUN5311DW1T1G Series

TYPICAL ELECTRICAL CHARACTERISTICS — LMUN5316DW1T1G NPN TRANSISTOR

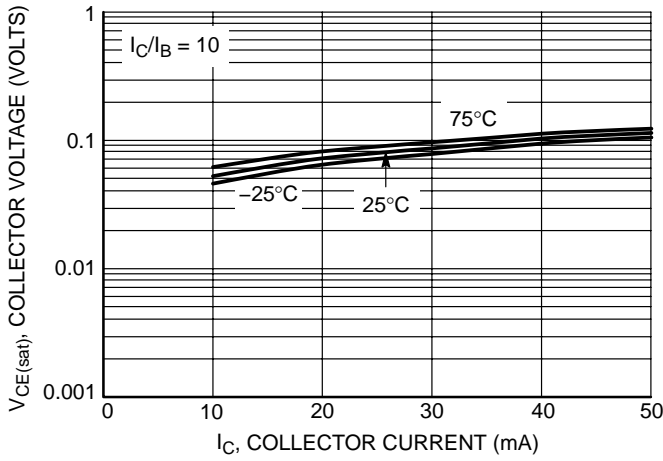


Figure 52. $V_{CE(sat)}$ versus I_C

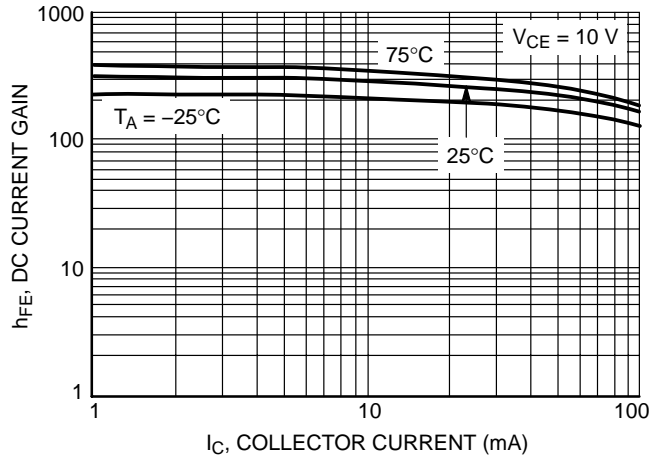


Figure 53. DC Current Gain

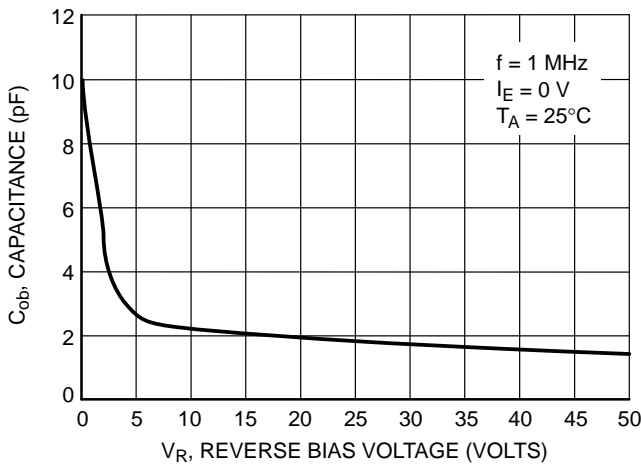


Figure 54. Output Capacitance

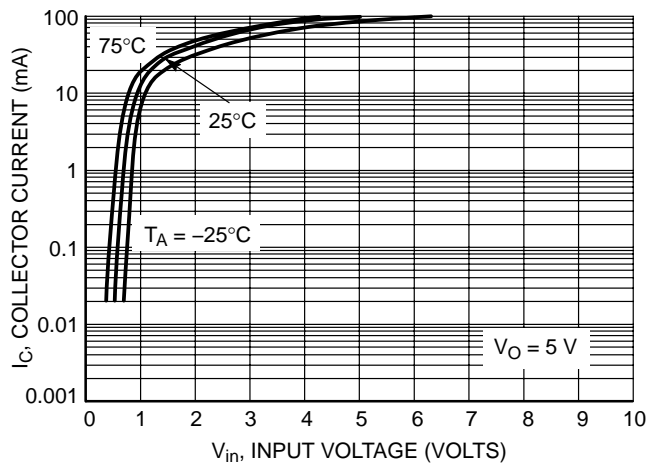


Figure 55. Output Current versus Input Voltage

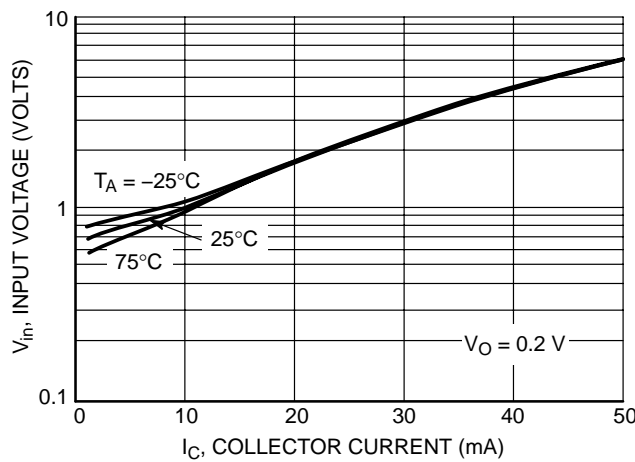


Figure 56. Input Voltage versus Output Current

LMUN5311DW1T1G Series S-LMUN5311DW1T1G Series

TYPICAL ELECTRICAL CHARACTERISTICS — LMUN5316DW1T1G PNP TRANSISTOR

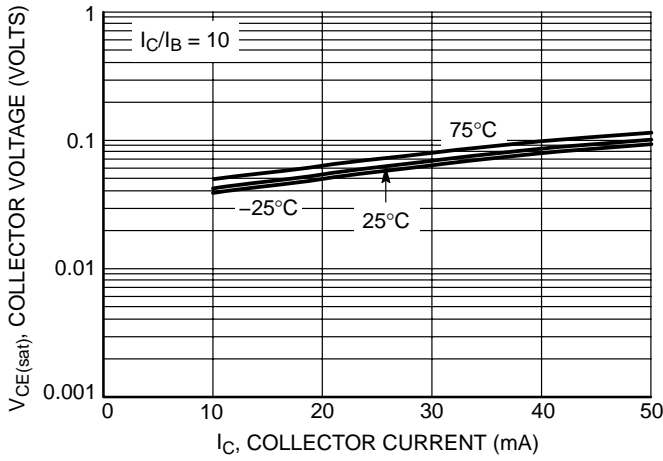


Figure 57. $V_{CE(sat)}$ versus I_C

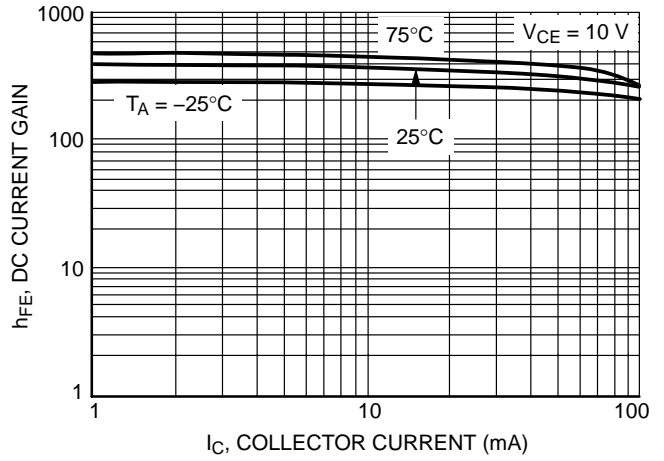


Figure 58. DC Current Gain

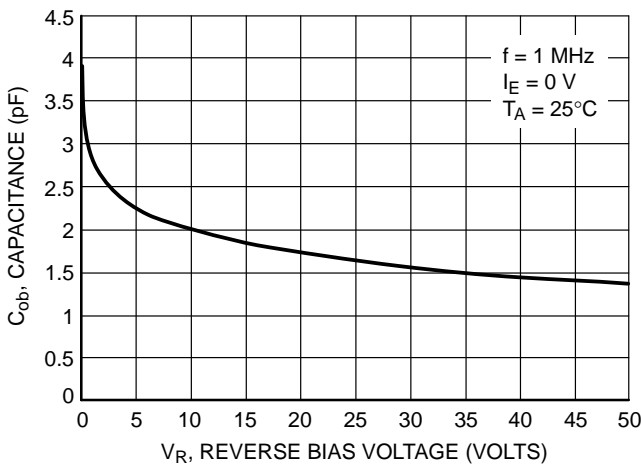


Figure 59. Output Capacitance

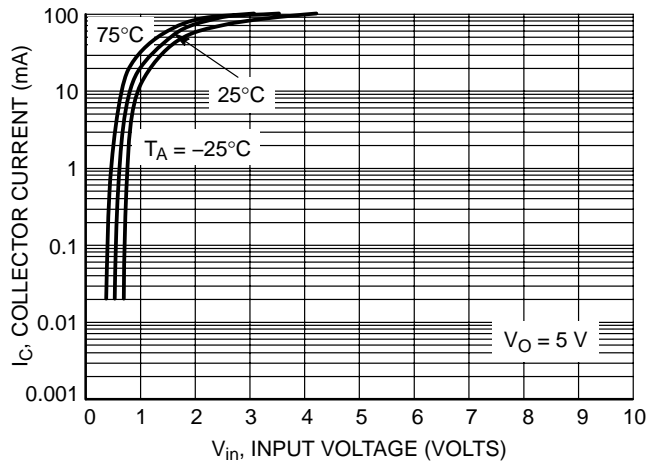


Figure 60. Output Current versus Input Voltage

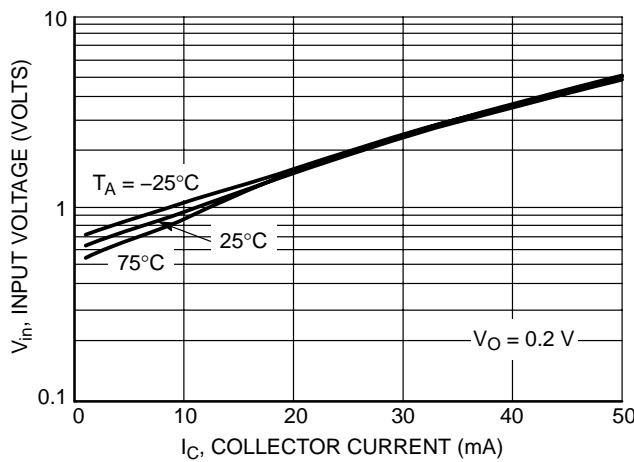


Figure 61. Input Voltage versus Output Current

LMUN5311DW1T1G Series S-LMUN5311DW1T1G Series

TYPICAL ELECTRICAL CHARACTERISTICS — LMUN5330DW1T1G NPN TRANSISTOR

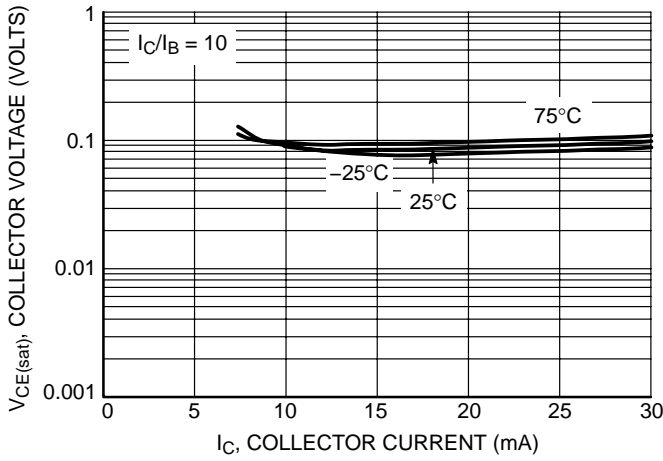


Figure 62. $V_{CE(sat)}$ versus I_C

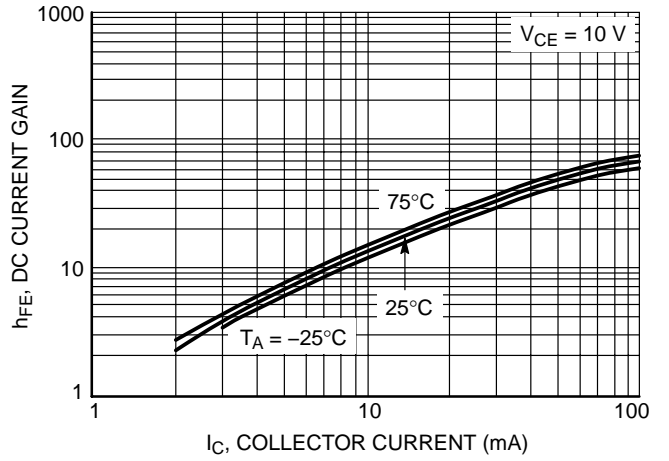


Figure 63. DC Current Gain

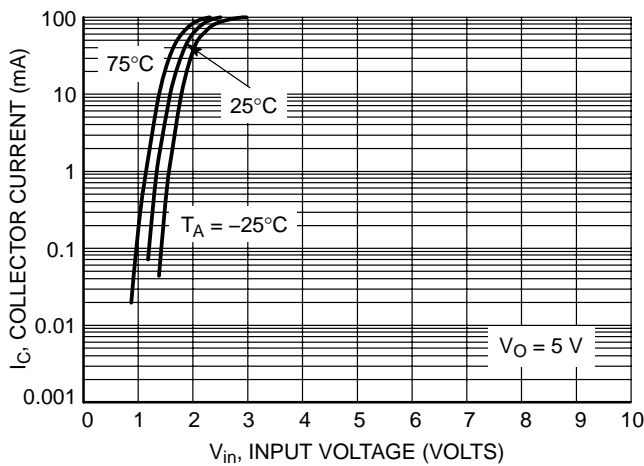


Figure 64. Output Current versus Input Voltage

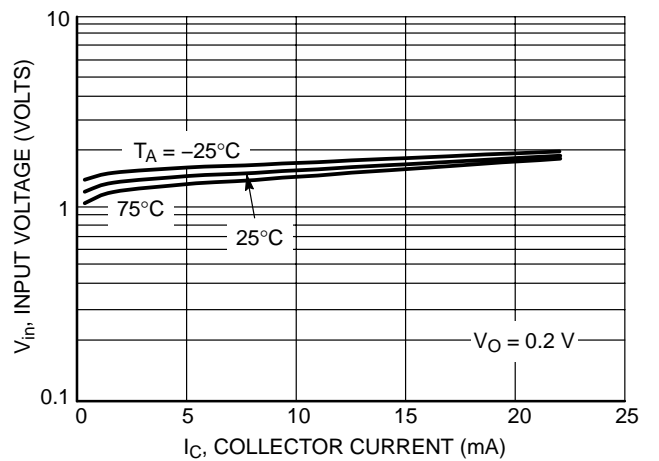


Figure 65. Input Voltage versus Output Current

LMUN5311DW1T1G Series S-LMUN5311DW1T1G Series

TYPICAL ELECTRICAL CHARACTERISTICS — LMUN5330DW1T1G PNP TRANSISTOR

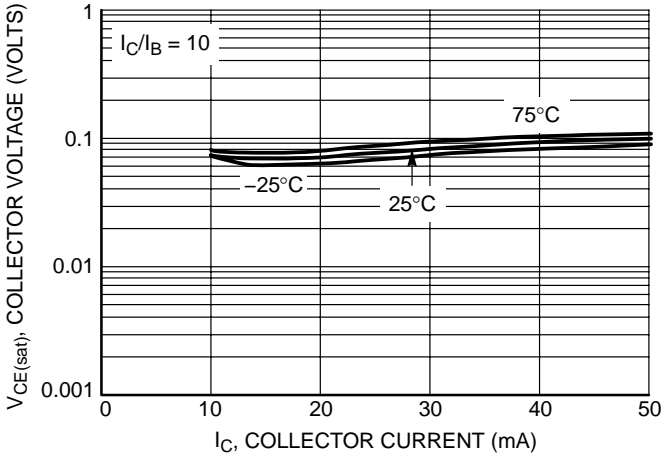


Figure 66. $V_{CE(sat)}$ versus I_C

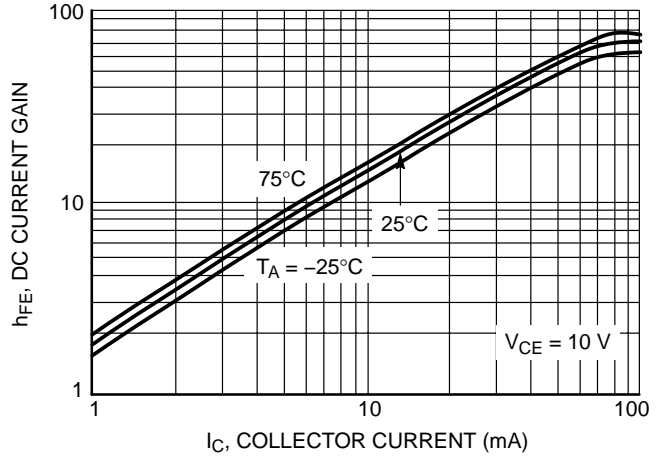


Figure 67. DC Current Gain

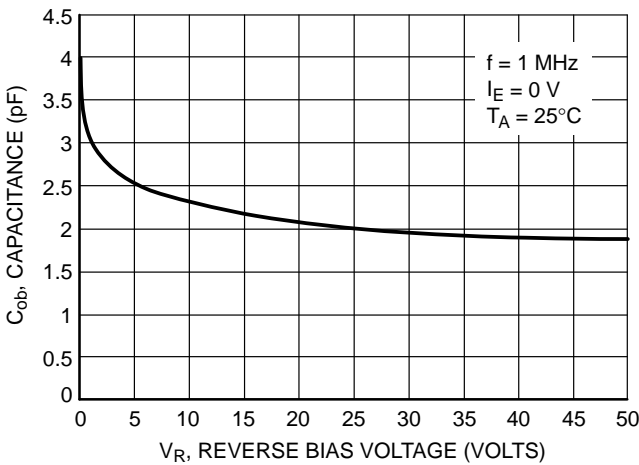


Figure 68. Output Capacitance

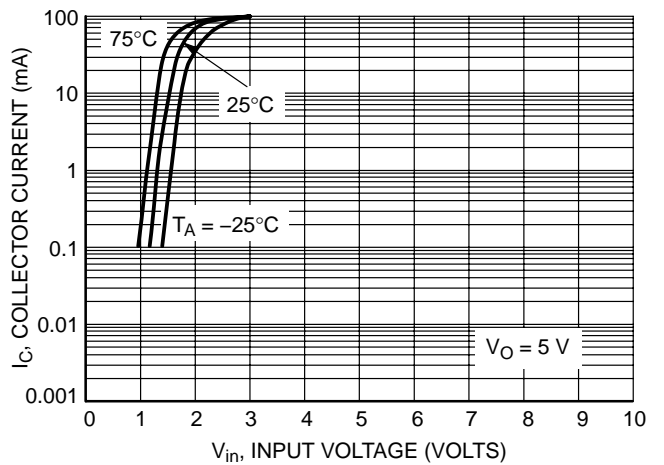


Figure 69. Output Current versus Input Voltage

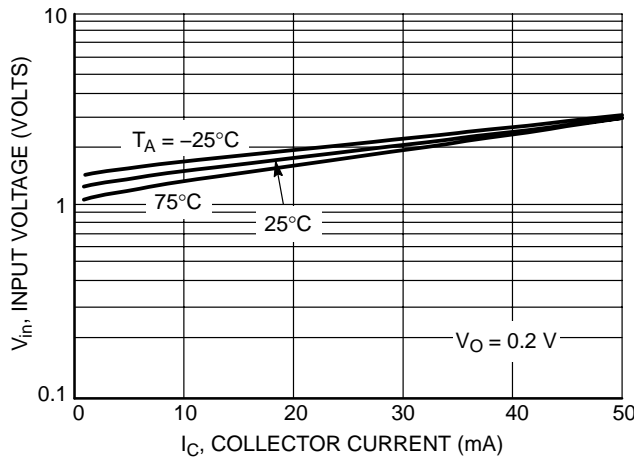


Figure 70. Input Voltage versus Output Current

LMUN5311DW1T1G Series S-LMUN5311DW1T1G Series

TYPICAL ELECTRICAL CHARACTERISTICS — LMUN5330DW1T1G PNP TRANSISTOR

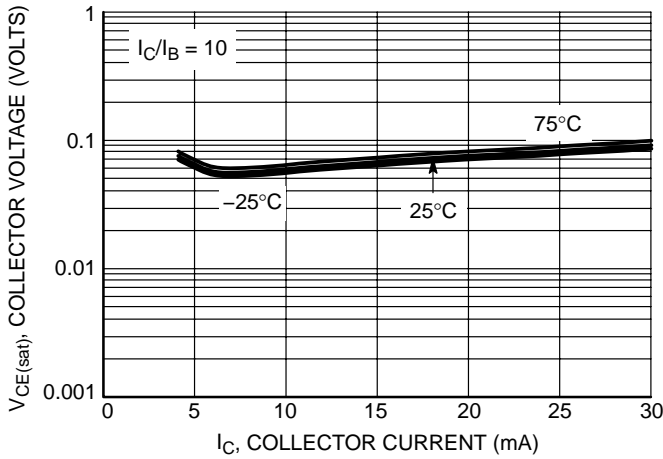


Figure 71. $V_{CE(sat)}$ versus I_C

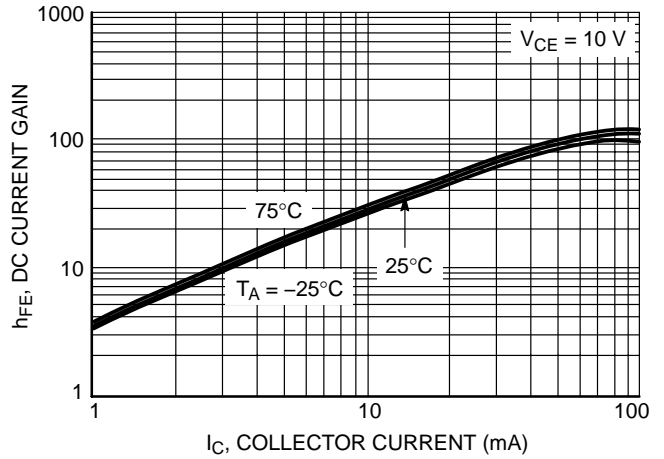


Figure 72. DC Current Gain

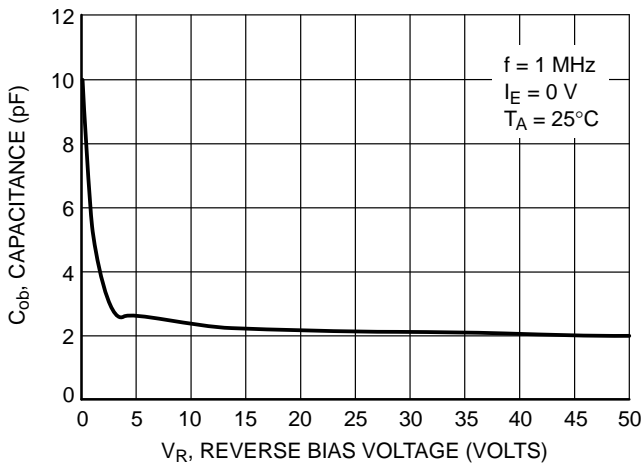


Figure 73. Output Capacitance

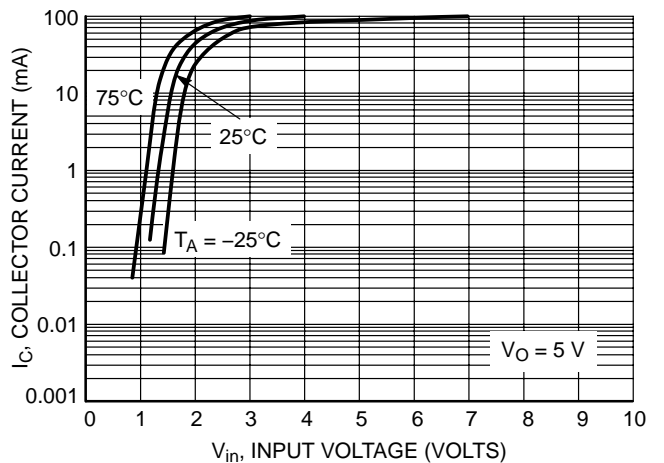


Figure 74. Output Current versus Input Voltage

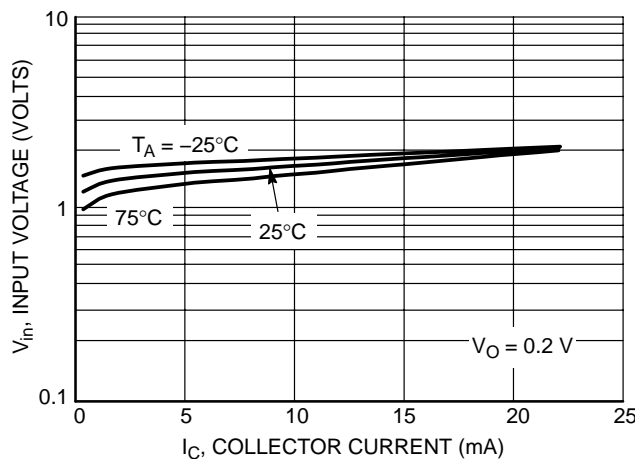


Figure 75. Input Voltage versus Output Current

LMUN5311DW1T1G Series S-LMUN5311DW1T1G Series

TYPICAL ELECTRICAL CHARACTERISTICS — LMUN5311DW1T1G PNP TRANSISTOR

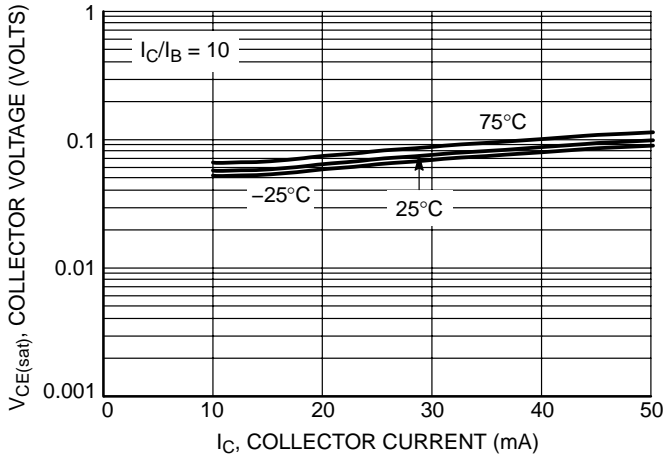


Figure 76. $V_{CE(sat)}$ versus I_C

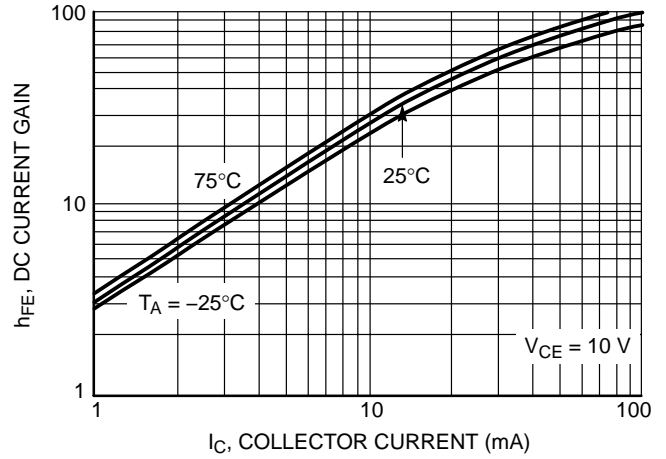


Figure 77. DC Current Gain

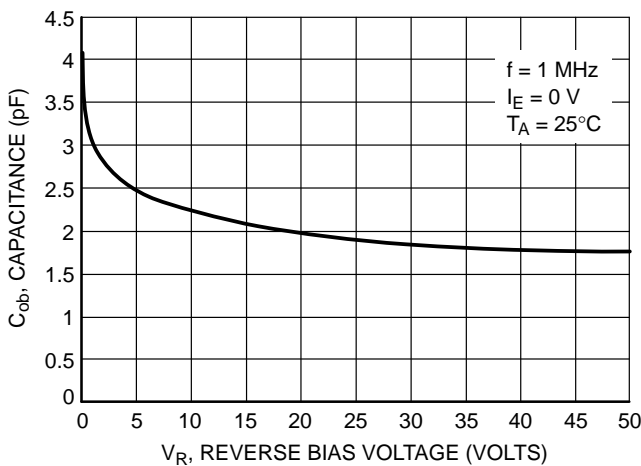


Figure 78. Output Capacitance

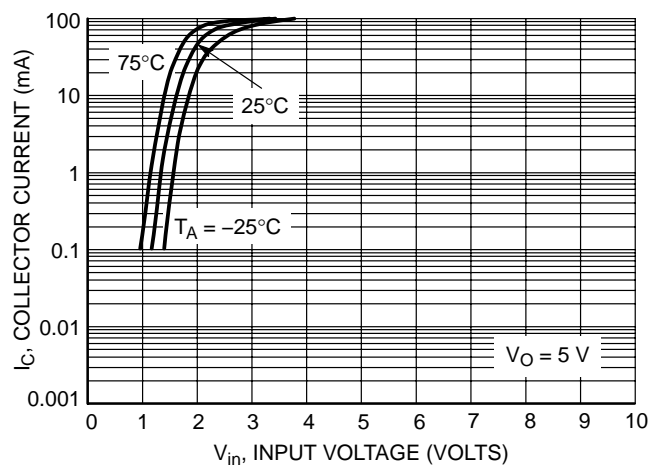


Figure 79. Output Current versus Input Voltage

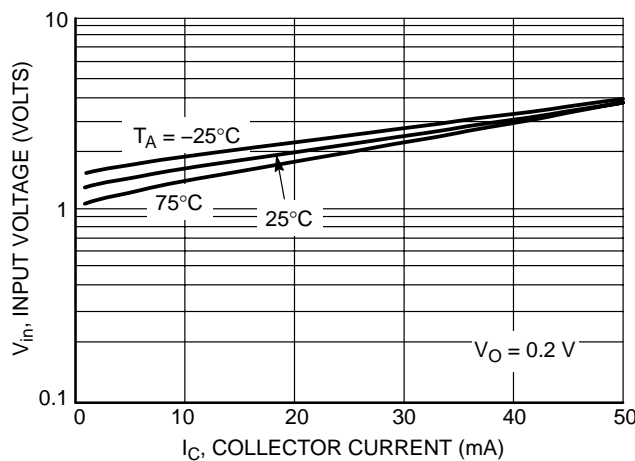


Figure 80. Input Voltage versus Output Current

LMUN5311DW1T1G Series S-LMUN5311DW1T1G Series

TYPICAL ELECTRICAL CHARACTERISTICS — LMUN5332DW1T1G NPN TRANSISTOR

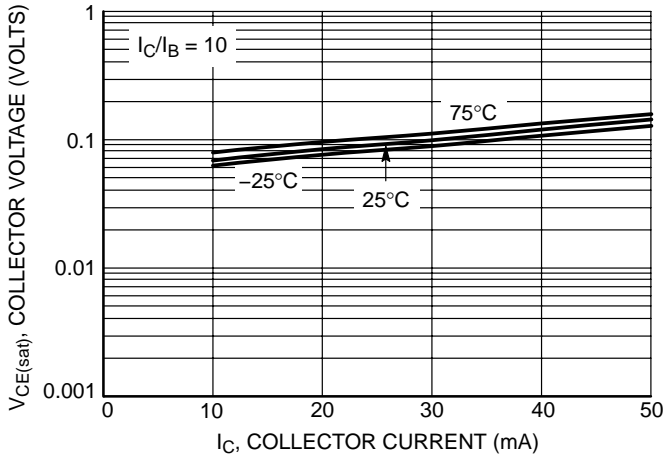


Figure 81. $V_{CE(sat)}$ versus I_C

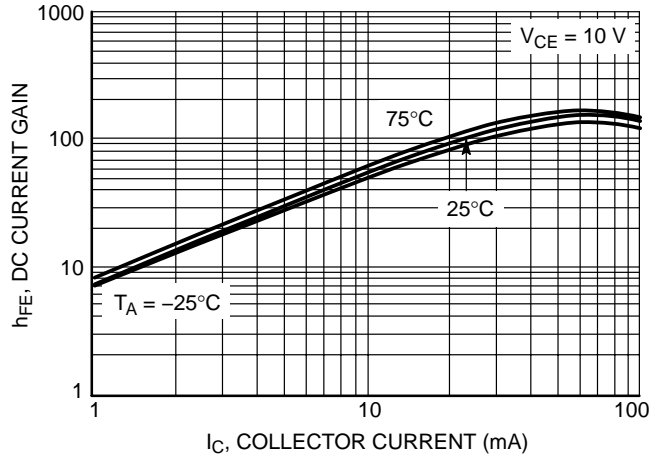


Figure 82. DC Current Gain

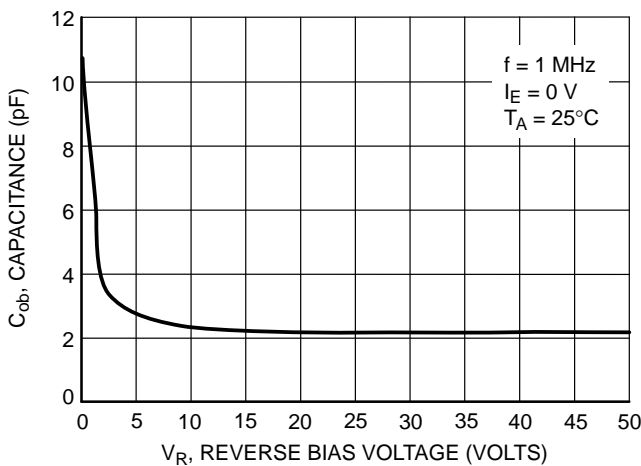


Figure 83. Output Capacitance

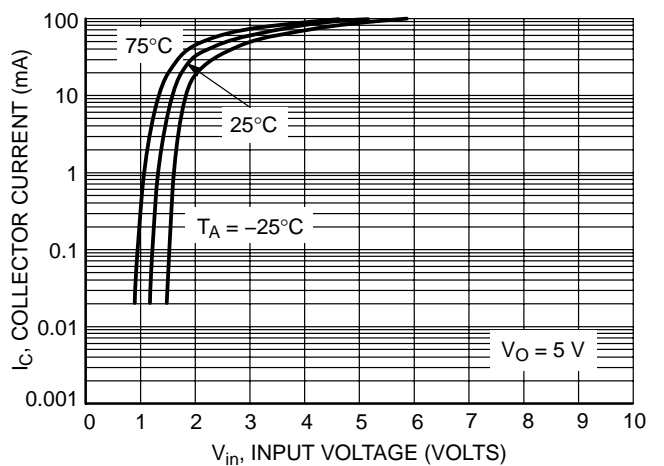


Figure 84. Output Current versus Input Voltage

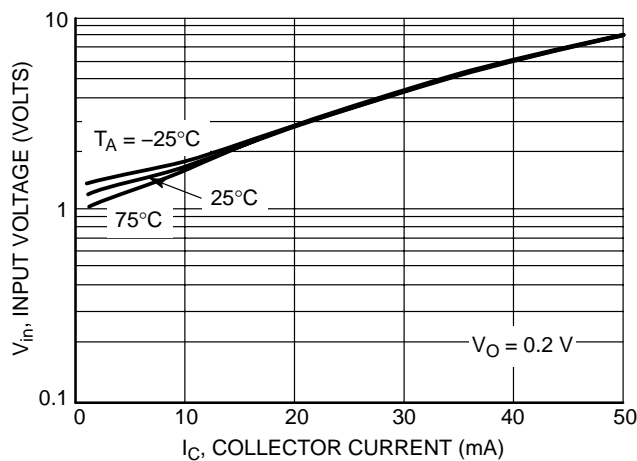


Figure 85. Input Voltage versus Output Current

LMUN5311DW1T1G Series S-LMUN5311DW1T1G Series

TYPICAL ELECTRICAL CHARACTERISTICS — LMUN5332DW1T1G PNP TRANSISTOR

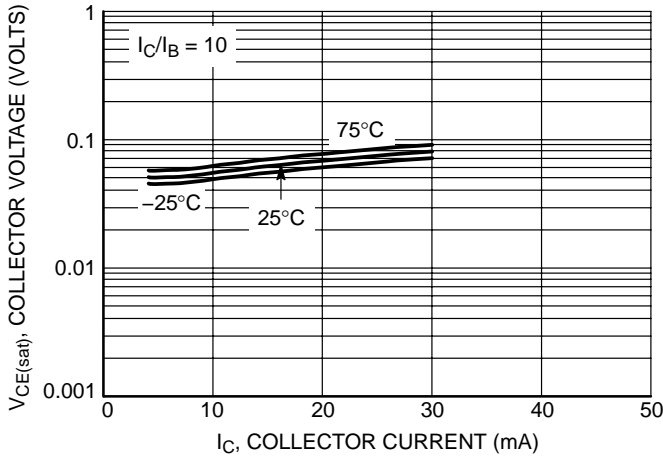


Figure 86. $V_{CE(sat)}$ versus I_C

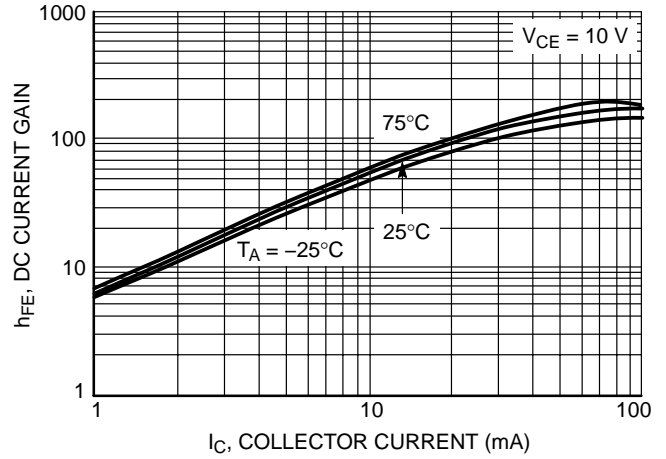


Figure 87. DC Current Gain

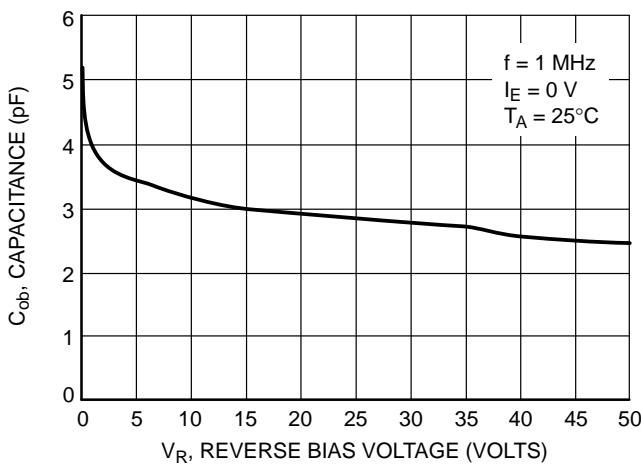


Figure 88. Output Capacitance

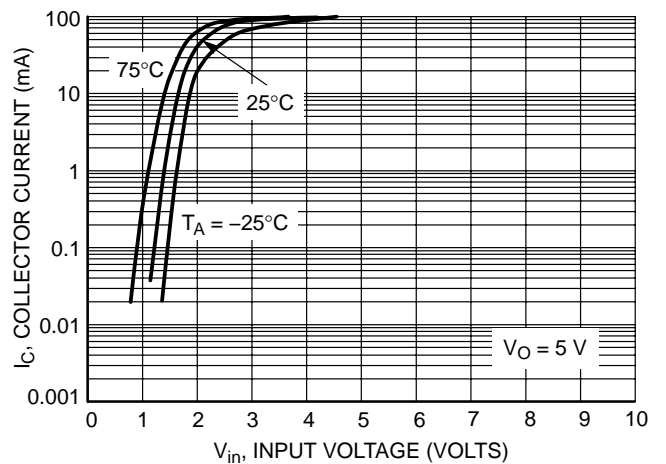


Figure 89. Output Current versus Input Voltage

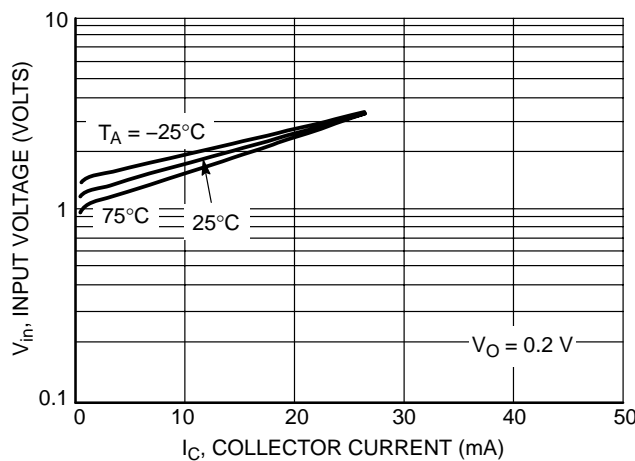


Figure 90. Input Voltage versus Output Current

LMUN5311DW1T1G Series S-LMUN5311DW1T1G Series

TYPICAL ELECTRICAL CHARACTERISTICS — LMUN5333DW1T1G NPN TRANSISTOR

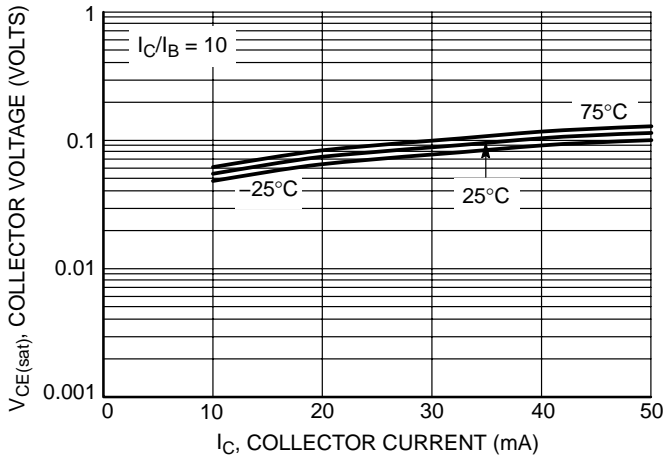


Figure 91. $V_{CE(sat)}$ versus I_C

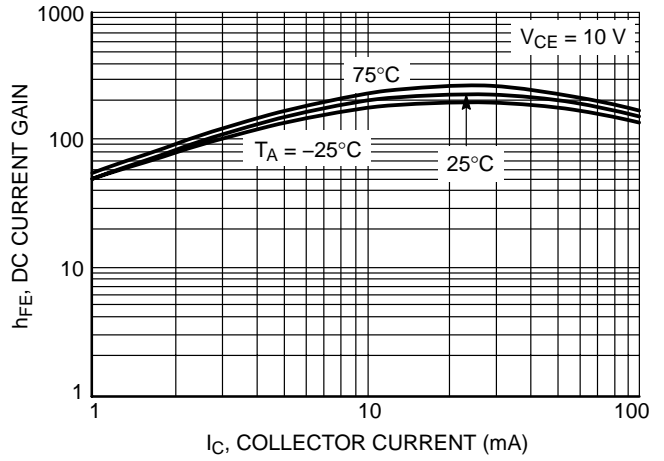


Figure 92. DC Current Gain

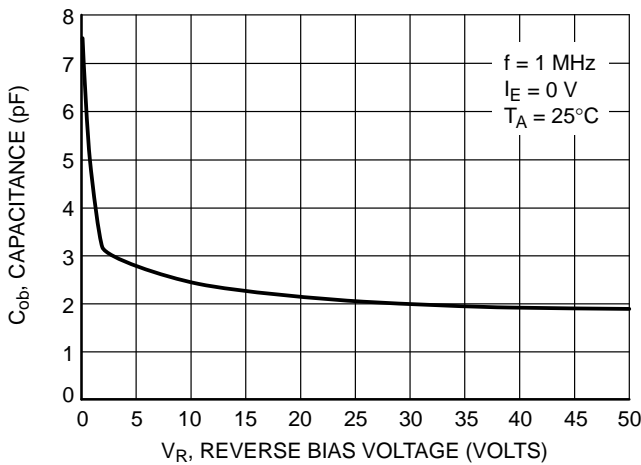


Figure 93. Output Capacitance

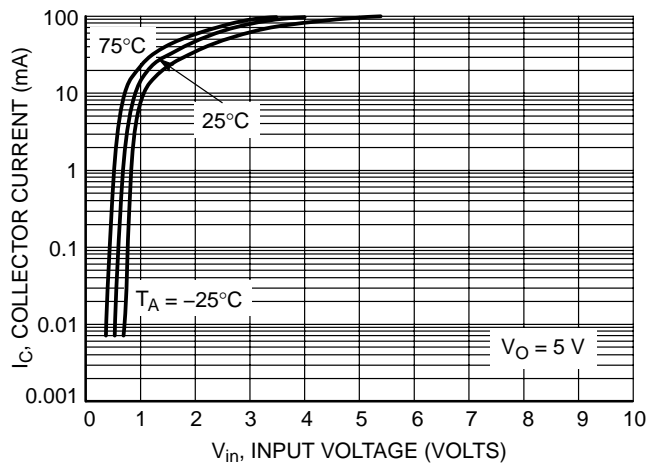


Figure 94. Output Current versus Input Voltage

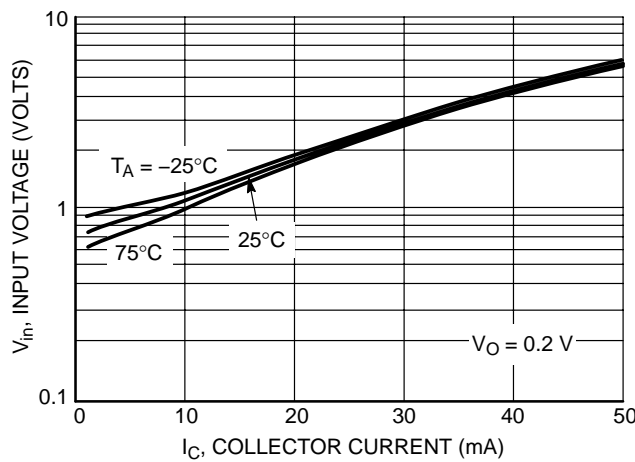


Figure 95. Input Voltage versus Output Current

LMUN5311DW1T1G Series S-LMUN5311DW1T1G Series

TYPICAL ELECTRICAL CHARACTERISTICS — LMUN5333DW1T1G PNP TRANSISTOR

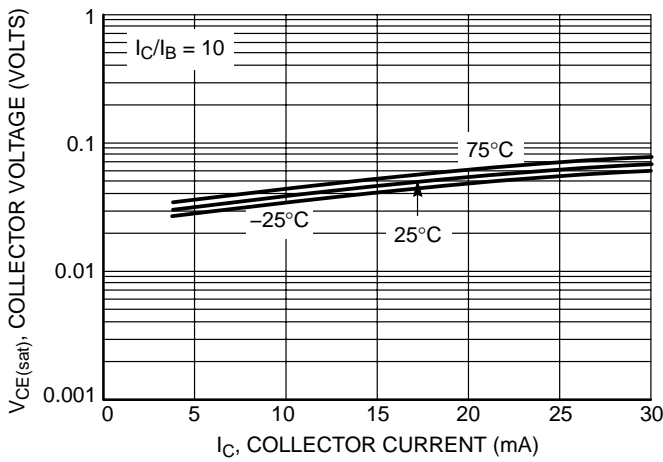


Figure 96. $V_{CE(sat)}$ versus I_C

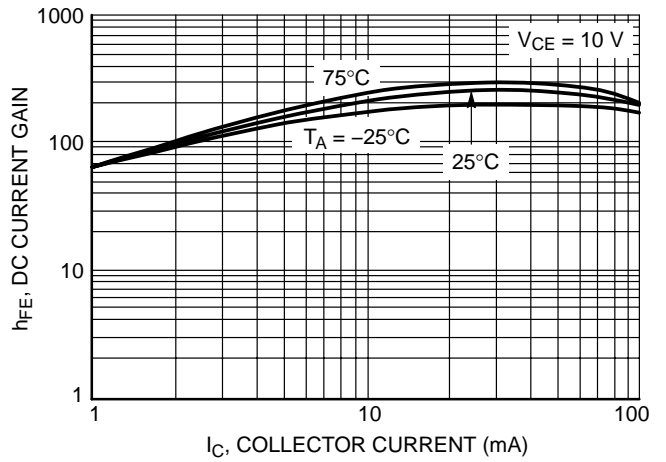


Figure 97. DC Current Gain

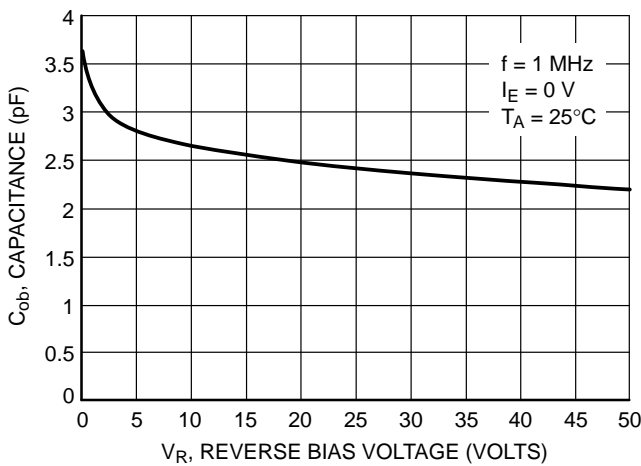


Figure 98. Output Capacitance

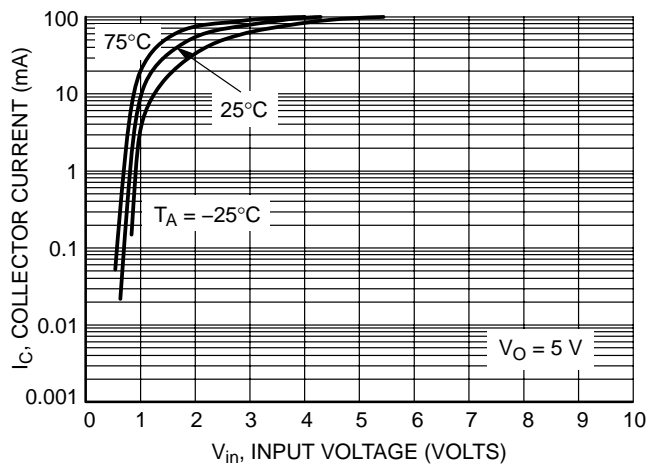


Figure 99. Output Current versus Input Voltage

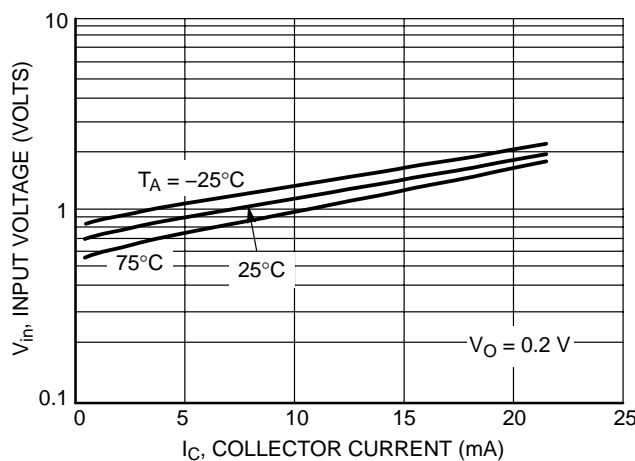


Figure 100. Input Voltage versus Output Current

LMUN5311DW1T1G Series S-LMUN5311DW1T1G Series

TYPICAL ELECTRICAL CHARACTERISTICS — LMUN5334DW1T1G NPN TRANSISTOR

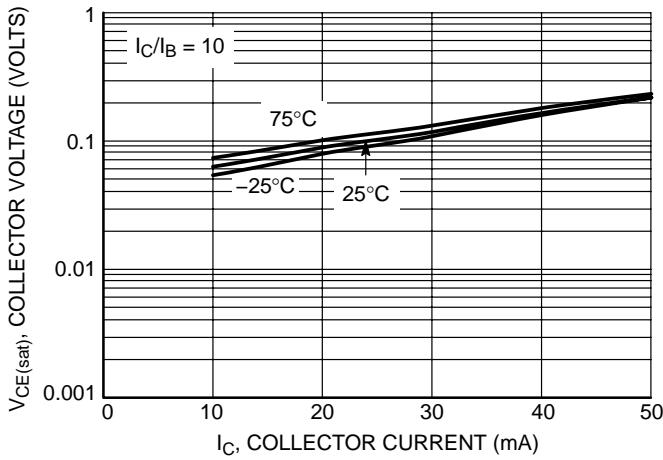


Figure 101. $V_{CE(sat)}$ versus I_C

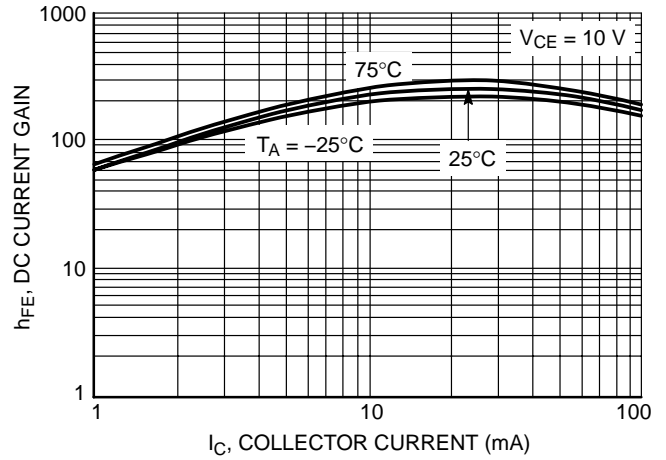


Figure 102. DC Current Gain

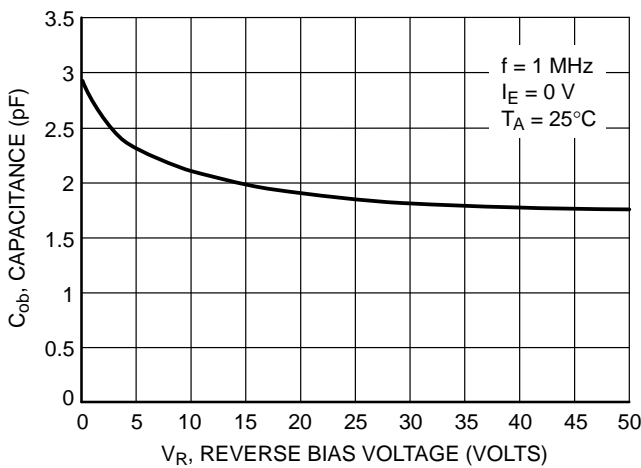


Figure 103. Output Capacitance

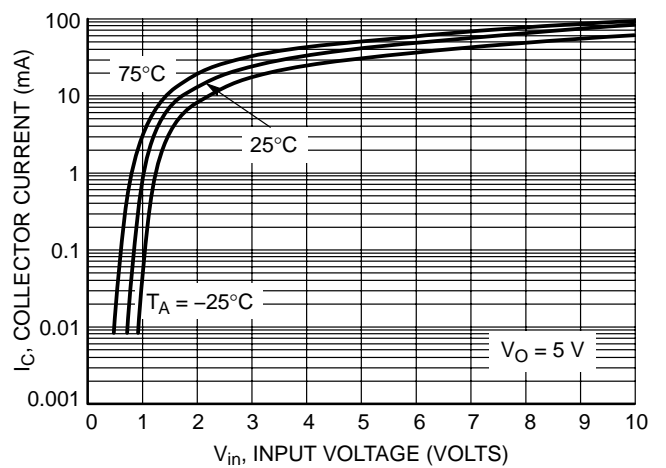


Figure 104. Output Current versus Input Voltage

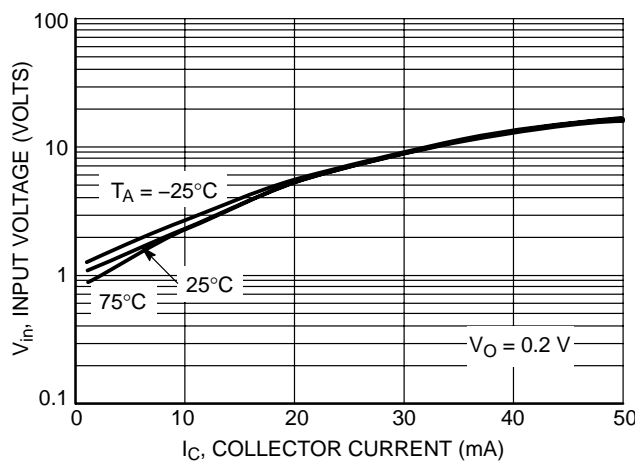
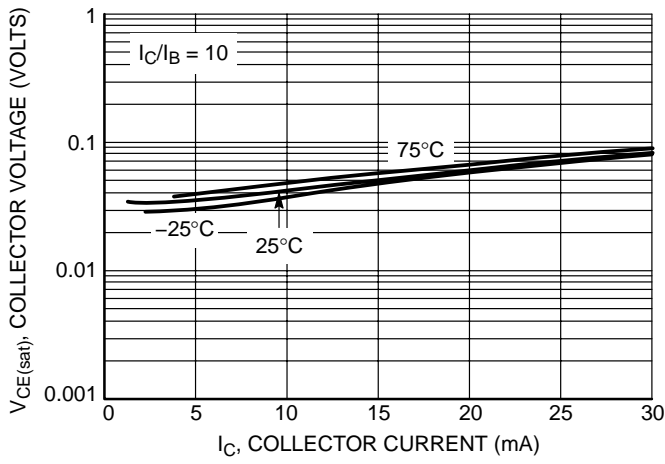
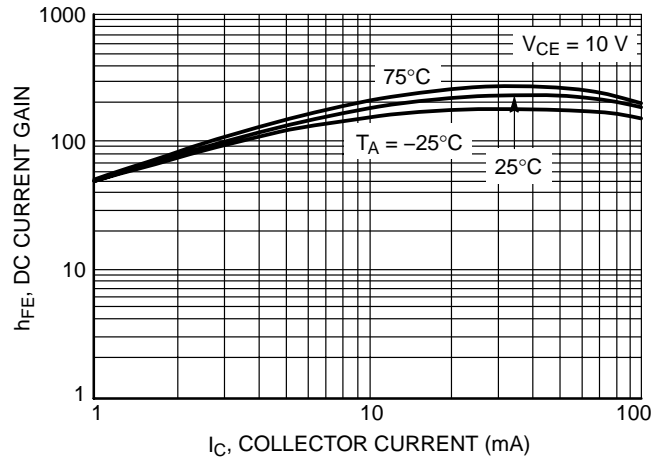


Figure 105. Input Voltage versus Output Current

LMUN5311DW1T1G Series S-LMUN5311DW1T1G Series
TYPICAL ELECTRICAL CHARACTERISTICS — LMUN5334DW1T1G PNP TRANSISTOR

Figure 106. $V_{CE(sat)}$ versus I_C

Figure 107. DC Current Gain

TYPICAL ELECTRICAL CHARACTERISTICS — LMUN5335DW1T1G NPN TRANSISTOR

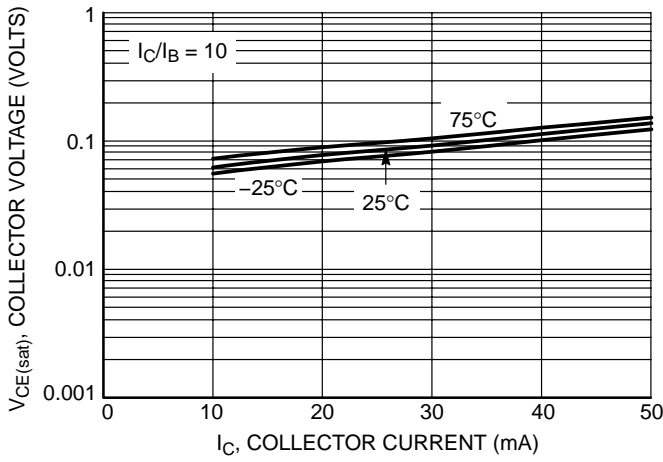


Figure 108. $V_{CE(sat)}$ versus I_C

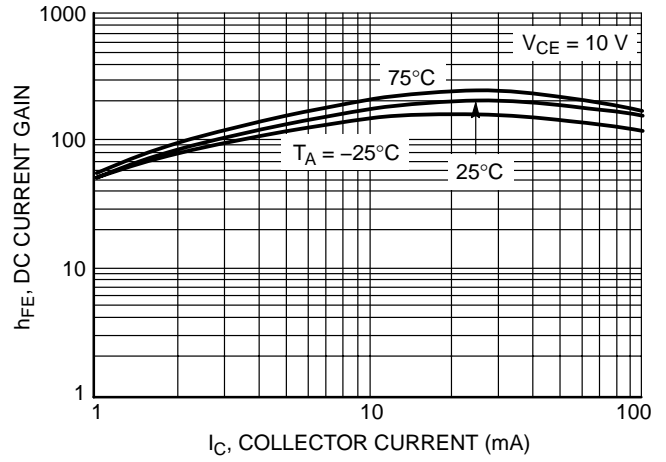


Figure 109. DC Current Gain

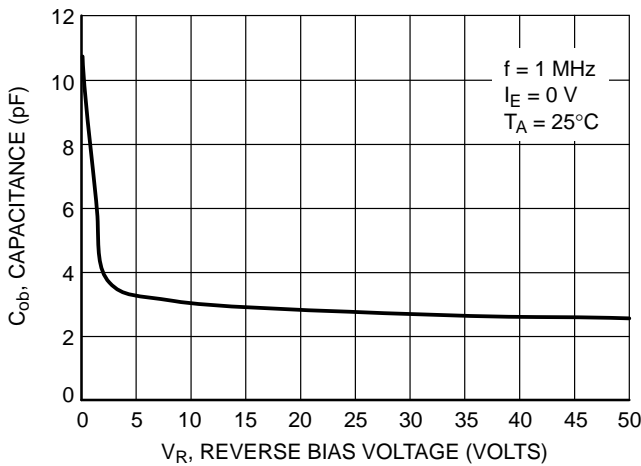


Figure 110. Output Capacitance

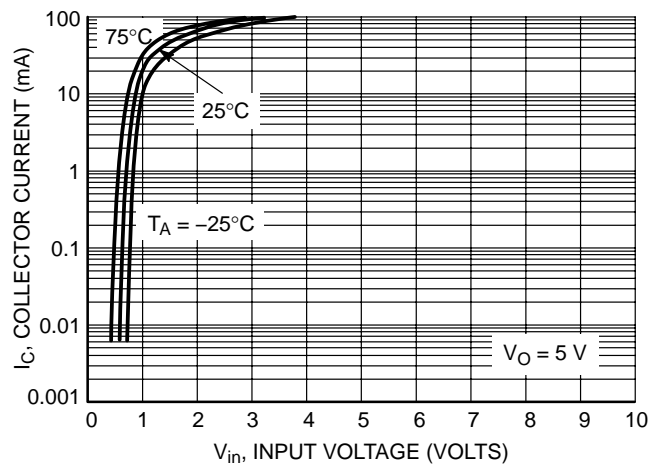


Figure 111. Output Current versus Input Voltage

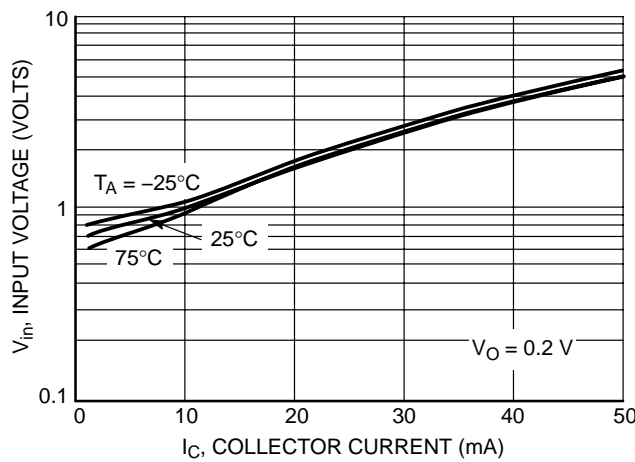


Figure 112. Input Voltage versus Output Current

LMUN5311DW1T1G Series S-LMUN5311DW1T1G Series

TYPICAL ELECTRICAL CHARACTERISTICS — LMUN5335DW1T1G PNP TRANSISTOR

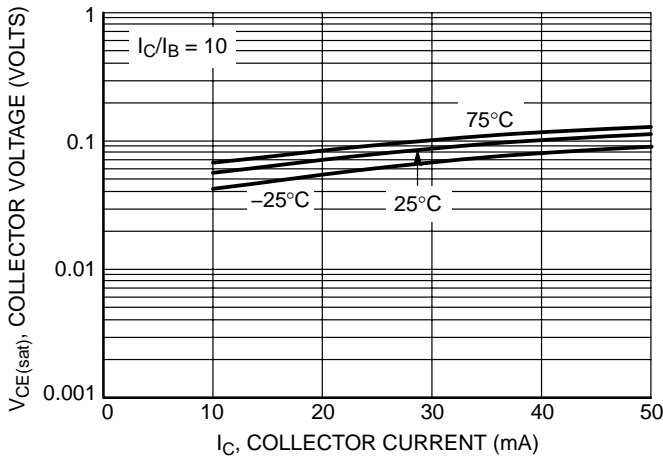


Figure 113. $V_{CE(sat)}$ versus I_C

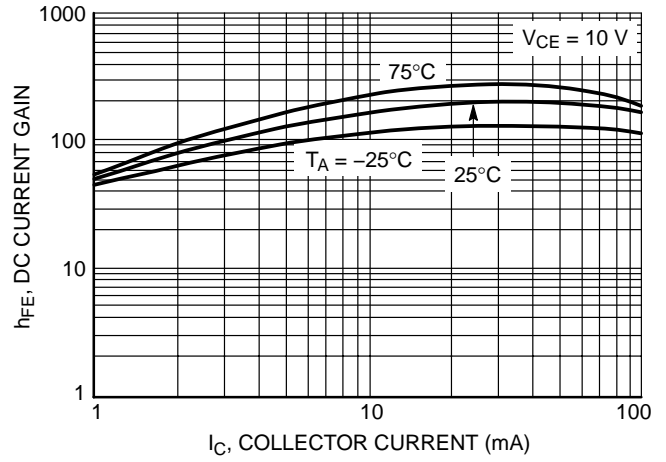


Figure 114. DC Current Gain

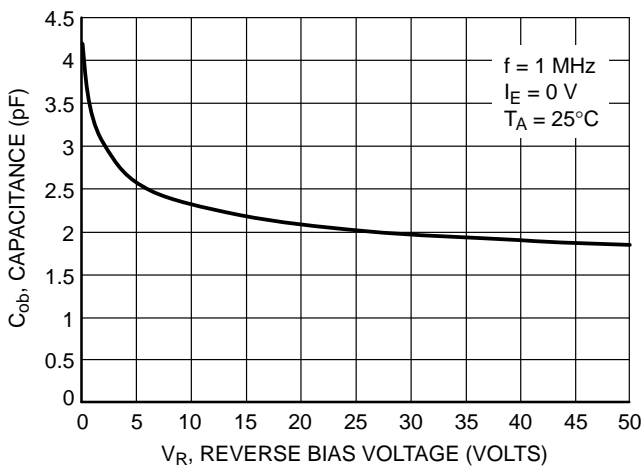


Figure 115. Output Capacitance

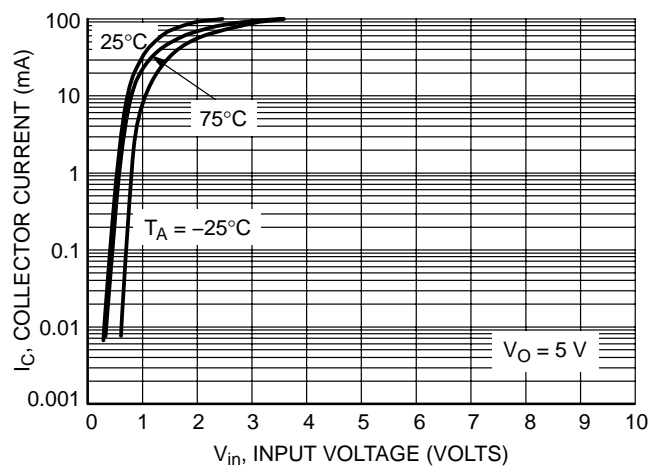


Figure 116. Output Current versus Input Voltage


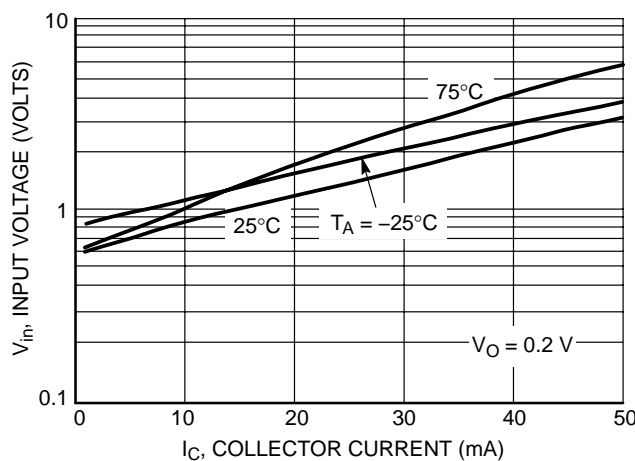


Figure 117. Input Voltage versus Output Current

LMUN5311DW1T1G Series S-LMUN5311DW1T1G Series

SC-88/SOT-363

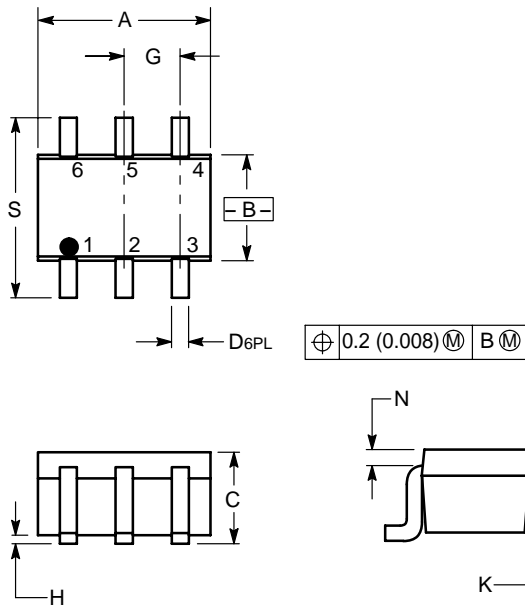


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

| DIM | INCHES | | MILLIMETERS | |
|-----|-----------|-------|-------------|------|
| | MIN | MAX | MIN | MAX |
| A | 0.071 | 0.087 | 1.80 | 2.20 |
| B | 0.045 | 0.053 | 1.15 | 1.35 |
| C | 0.031 | 0.043 | 0.80 | 1.10 |
| D | 0.004 | 0.012 | 0.10 | 0.30 |
| G | 0.026 BSC | | 0.65 BSC | |
| H | --- | 0.004 | --- | 0.10 |
| J | 0.004 | 0.010 | 0.10 | 0.25 |
| K | 0.004 | 0.012 | 0.10 | 0.30 |
| N | 0.008 REF | | 0.20 REF | |
| S | 0.079 | 0.087 | 2.00 | 2.20 |

- PIN 1. EMITTER 2
 2. BASE 2
 3. COLLECTOR 1
 4. EMITTER 1
 5. BASE 1
 6. COLLECTOR 2

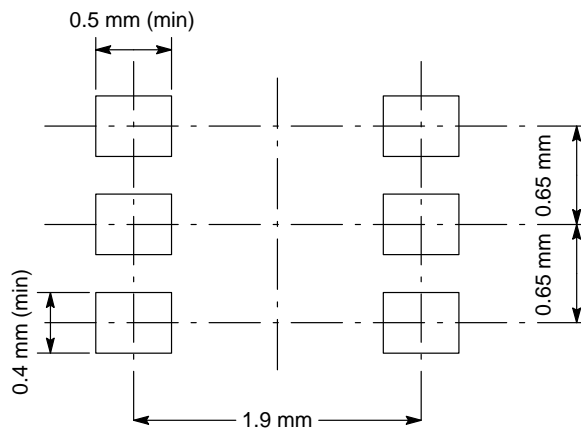

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [Leshan manufacturer](#):

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)