

**Ultra-Small Built-In Delay
High-Precision Voltage Detector**

LR8809 Series

■ INTRODUCTION

The LR8809 Series is a series of high-precision voltage detectors with a built-in delay time generator of fixed time. developed using CMOS process.

The detection voltage is fixed internally, with an accuracy of $\pm 2.0\%$. Internal oscillator and counter timer can delay the release signal without external parts, delay times 200 ms
Two output forms, NMOS open-drain and CMOS output are available.

■ APPLICATIONS

- Memory battery back-up circuits
- Power-on reset circuits
- Power failure detection
- Power monitor for portable equipment such as notebook computers, digital cameras, PDA, and cellular phones.
- Constant voltage power monitors for cameras, video equipment and communication devices.
- Power monitor for microcomputers and reset for CPUs.

■ FEATURES



- Ultra-low current consumption:
0.9 μ A@3.5V(Typ.)
- High-precision detection voltage: $\pm 2.0\%$
- Hysteresis characteristics: $-V_{DET} \times 5\%$ (Typ.)
- Operating voltage range: 0.95V to 7.0V
- Detection voltage: 1.5V to 6.0V (10mV step)
- Delay time: 210 ms (Typ.)
- Output forms:
NMOS open-drain output (Active Low)
CMOS output (Active Low)

■ ORDER INFORMATION

LR8809①②③④⑤


| DESIGNATOR | SYMBOL | DESCRIPTION |
|------------|------------|--|
| ① | C | CMOS |
| | N | NMOS open drain |
| ②③④ | Integer | Detection Voltage (1.50V~6.00V), “④”elide when it is “0” e.g. 3.0V=②:3, ③:0 2.93V=②:2, ③:9, ④:3 |
| ⑤ | M/MA/ML | Package: SOT-23-3 |
| | MR | Package: SOT-23-5 |
| | P | Package: SOT-89-3 |
| | E | Package: SOT-23-6 |
| | MB/MAB/MLB | Package: SOT-23 |

■ BLOCK DIAGRAMS

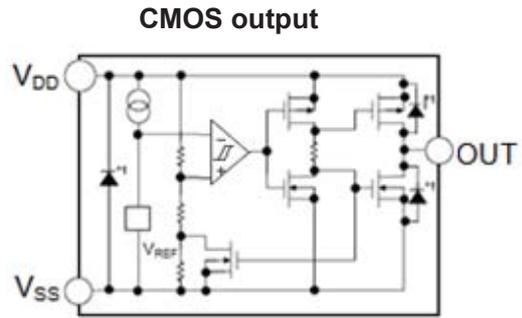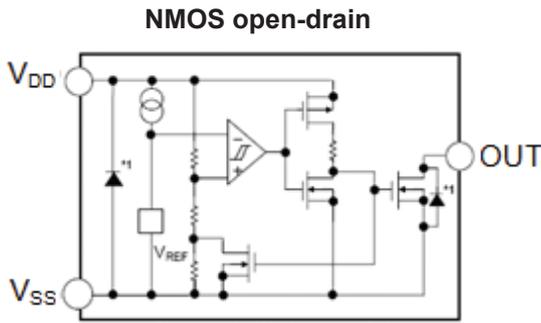

■ PIN CONFIGURATION

LR8809 Series (SOT-23-3/SOT-23)

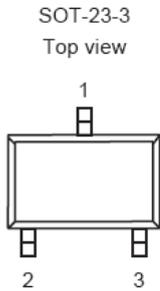


| PIN NO. | M/MB | MA/MAB | ML/MLB | FUNCTION |
|---------|------------------|------------------|------------------|------------------------------|
| 1 | V _{DD} | V _{DD} | - | Voltage input pin |
| | - | - | V _{SS} | Ground |
| 2 | V _{OUT} | - | V _{OUT} | Voltage detection output pin |
| | - | V _{SS} | - | Ground |
| 3 | V _{SS} | - | - | Ground |
| | - | V _{OUT} | - | Voltage detection output pin |
| | - | - | V _{DD} | Voltage input pin |




LR8809 Series (SOT-89-3)

| PIN NO. | P | FUNCTION |
|---------|------------------|------------------------------|
| 1 | V _{OUT} | Voltage detection output pin |
| 2 | V _{DD} | Voltage input pin |
| 3 | V _{SS} | Ground |

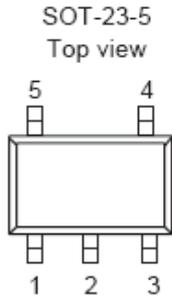

LR8809 Series (SOT23-5)

| PIN NO. | MR | FUNCTION |
|---------|-----------|------------------------------|
| 1 | V_{OUT} | Voltage detection output pin |
| 2 | V_{DD} | Voltage input pin |
| 3 | V_{SS} | Ground |
| 4 | NC | No connection |
| 5 | NC | No connection |



LR8809 Series (SOT23-6)

| PIN NO | E | FUNCTION |
|--------|------|------------------------------|
| 1 | NC | No Connection |
| 2 | VSS | Ground |
| 3 | VOUT | Voltage detection output pin |
| 4 | VDD | Voltage input pin |
| 5 | NC | No Connection |
| 6 | NC | No Connection |

■ ABSOLUTE MAXIMUM RATINGS

($T_a=25^{\circ}\text{C}$, unless otherwise specified)

| PARAMETER | | SYMBOL | RATINGS | UNITS |
|-------------------------------|----------|--------------|-----------------------------------|--------------------|
| Power supply voltage | | V_{DD} | $V_{SS}-0.3 \sim V_{SS}+8$ | V |
| Output voltage | | V_{OUT} | $V_{SS}-0.3 \sim V_{SS}+8$ | V |
| Power dissipation | SOT-23-3 | PD | 250 | mW |
| | SOT-89 | | 500 | mW |
| Operating ambient temperature | | T_{opr} | $-40 \sim +105$ | $^{\circ}\text{C}$ |
| Storage temperature | | T_{stg} | $-40 \sim +125$ | $^{\circ}\text{C}$ |
| Soldering Temperature & Time | | T_{solder} | $260^{\circ}\text{C}, 10\text{s}$ | |

■ ELECTRICAL CHARACTERISTICS

(Ta=25°C, unless otherwise specified)

| PARAMETER | SYMBOL | CONDITIONS | | MIN | TYP | MAX | UNITS |
|-------------------------|------------|--|------------------|--------------------------------|--------------------------------|--------------------------------|-----------------|
| Detection voltage*1 | $-V_{DET}$ | — | | $-V_{DET(S)}$ $\times 0.98$ | $-V_{DET(S)}$ | $-V_{DET(S)}$ $\times 1.02$ | V |
| Hysteresis width | V_{HYS} | — | | $0.02 \times$ $-V_{DET(S)}$ | $0.05 \times$ $-V_{DET(S)}$ | $0.08 \times$ $-V_{DET(S)}$ | V |
| Current consumption | I_{SS} | $V_{DD} = -V_{DET} + 0.5V$ | LR8809 C/N20~26 | — | 1.0 | 3.0 | uA |
| | | | LR8809 C/N 26~39 | — | 1.2 | 3.2 | uA |
| | | | LR8809 C/N 39~60 | — | 1.5 | 3.5 | uA |
| Operating voltage | V_{DD} | — | | 0.95 | — | 7 | V |
| Output current | I_{OUT} | NMOS: $V_{OUT} = 0.5 V$ $V_{DD} = -V_{DET} - 0.5 V$ | LR8809 C/N 20~26 | 3.0 | 13.0 | — | mA |
| | | | LR8809 C/N 26~39 | 3.0 | 15.0 | — | mA |
| | | | LR8809 C/N 39~60 | 3.0 | 18.0 | — | mA |
| | | PMOS: $V_{DD} - V_{OUT} = 0.5 V$ $V_{DD} = -V_{DET} + 0.5 V$ | LR8809 C/N 20~26 | 1.5 | 4.0 | — | mA |
| | | | LR8809 C/N 26~39 | 1.5 | 6.0 | — | mA |
| | | | LR8809 C/N 39~60 | 1.5 | 8.0 | — | mA |
| Leakage current | I_{LEAK} | Only for NMOS open-drain output products, $V_{DD} = 8.0 V, V_{OUT} = 8.0 V$ | | □ | — | 1.0 | uA |
| temperature coefficient | | $T_a = -40^\circ C \sim +85^\circ C$ | | — | ± 120 | ± 360 | ppm/ $^\circ C$ |
| Delay time | T_{PLH} | | | 130 | 210 | 290 | ms |

 *1. $-V_{DET}$: Actual detection voltage value, $-V_{DET(S)}$: Specified detection voltage value

■ **FUNCTIONAL DESCRIPTION**

1. When a voltage higher than the release voltage ($+V_{DET}$) is applied to the voltage input pin (V_{DD}), the voltage will gradually fall. When a voltage higher than the detect voltage ($-V_{DET}$) is applied to V_{DD} , output (V_{OUT}) will be equal to the input at V_{DD} .

Note that high impedance exists at V_{OUT} with the N-channel open drain configuration. If the pin is pulled up, V_{OUT} will be equal to the pull up voltage.

2. When V_{DD} falls below $-V_{DET}$, V_{OUT} will be equal to the ground voltage (V_{SS}) level (detect state).

Note that this also applies to N-channel open drain configurations.

3. When V_{DD} falls to a level below that of the minimum operating voltage (V_{MIN}) output will become unstable.


Because the output pin is generally pulled up with N-channel open drain configurations, output will be equal to pull up voltage.





4. When V_{DD} rises above the V_{SS} level (excepting levels lower than minimum operating voltage), V_{OUT} will be equal to V_{SS} until V_{DD} reaches the $+V_{DET}$ level.


5. Although V_{DD} will rise to a level higher than $+V_{DET}$, V_{OUT} maintains ground voltage level via the delay circuit.

6. Following transient delay time, V_{DD} will be output at V_{OUT} .


Note that high impedance exists with the N-channel open drain configuration and that voltage will be dependent on pull up

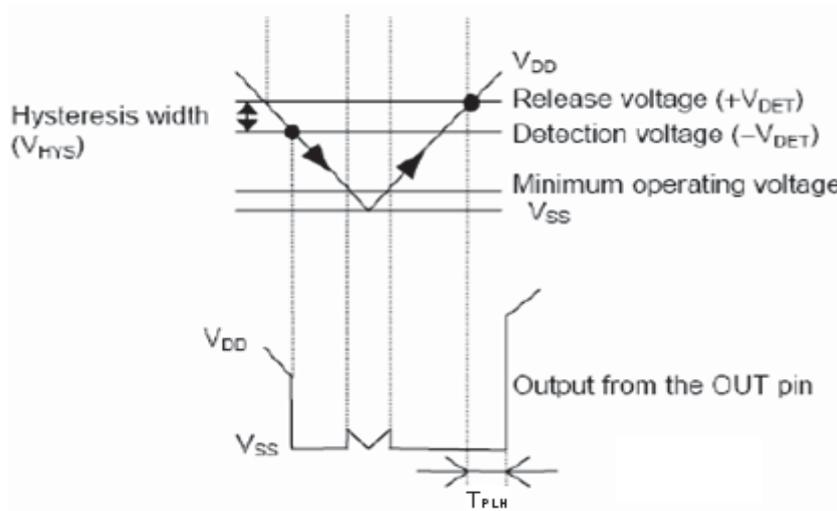

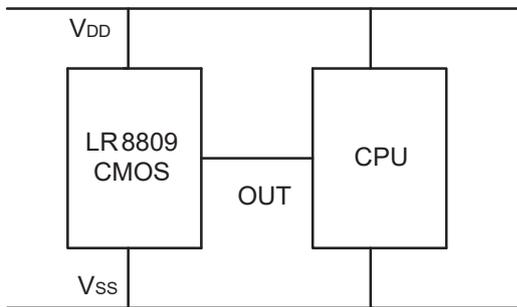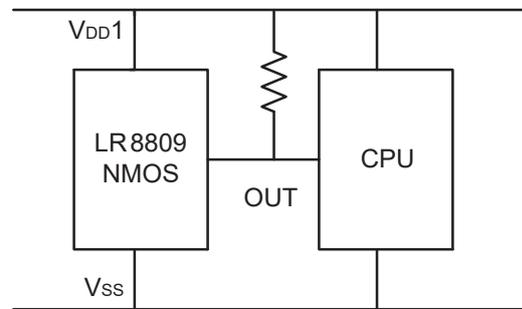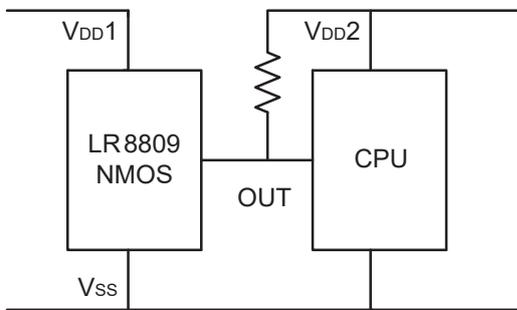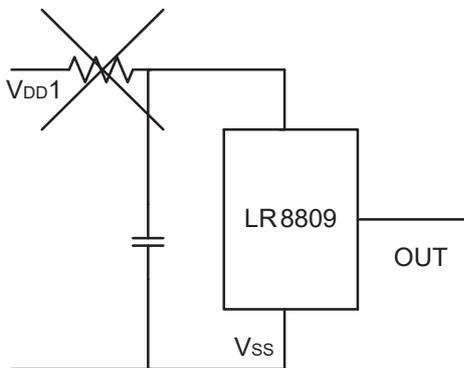
■ TYPICAL APPLICATION CIRCUITS**1、CMOS output:****2、NMOS open-drain****3. Forbidden Circuits**

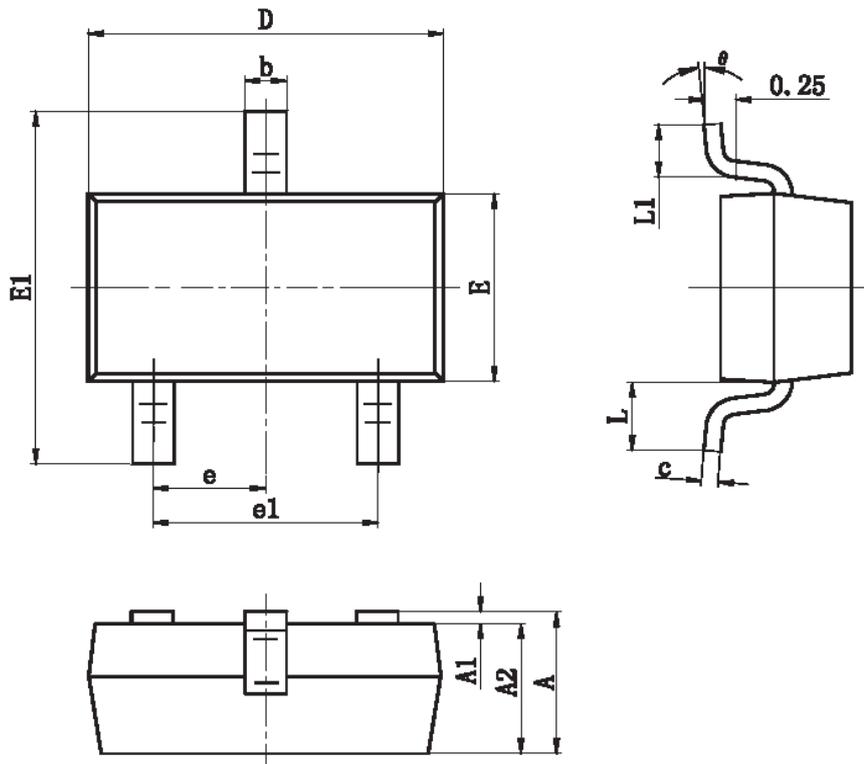■ PACKAGING INFORMATION
● SOT-23


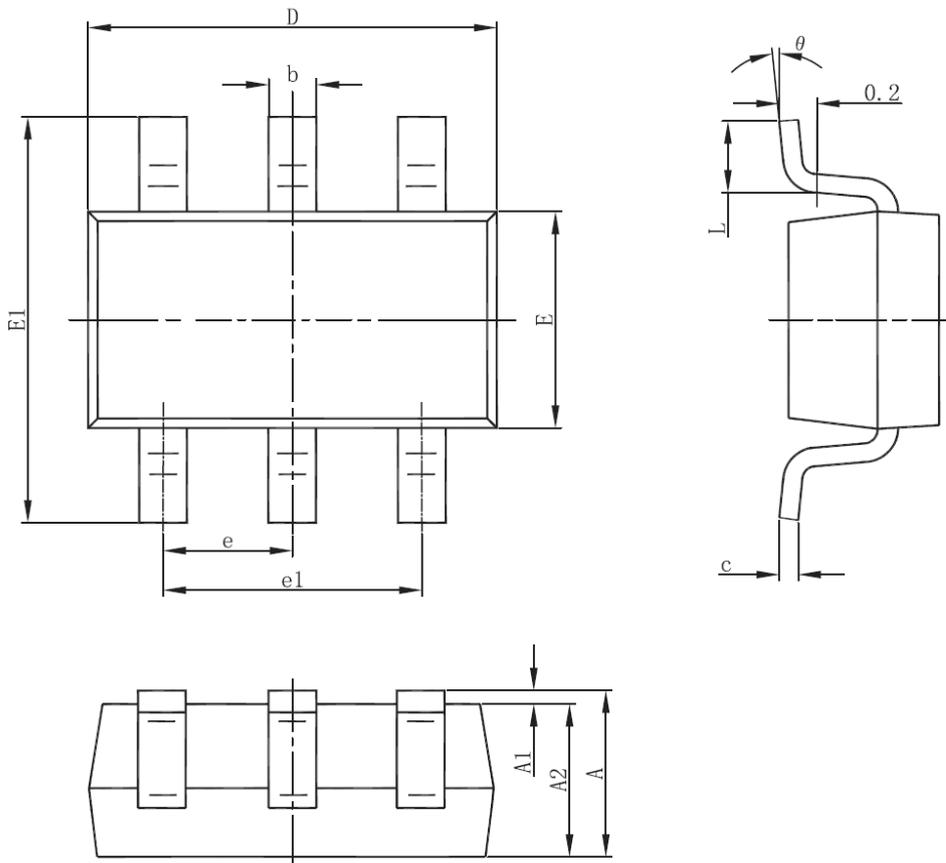
| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min | Max | Min | Max |
| A | 0.900 | 1.150 | 0.035 | 0.045 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 0.900 | 1.050 | 0.035 | 0.041 |
| b | 0.300 | 0.500 | 0.012 | 0.020 |
| c | 0.080 | 0.150 | 0.003 | 0.006 |
| D | 2.800 | 3.000 | 0.110 | 0.118 |
| E | 1.200 | 1.400 | 0.047 | 0.055 |
| E1 | 2.250 | 2.550 | 0.089 | 0.100 |
| e | 0.950 TYP | | 0.037 TYP | |
| e1 | 1.800 | 2.000 | 0.071 | 0.079 |
| L | 0.550 REF | | 0.022 REF | |
| L1 | 0.300 | 0.500 | 0.012 | 0.020 |
| θ | 0° | 8° | 0° | 6° |

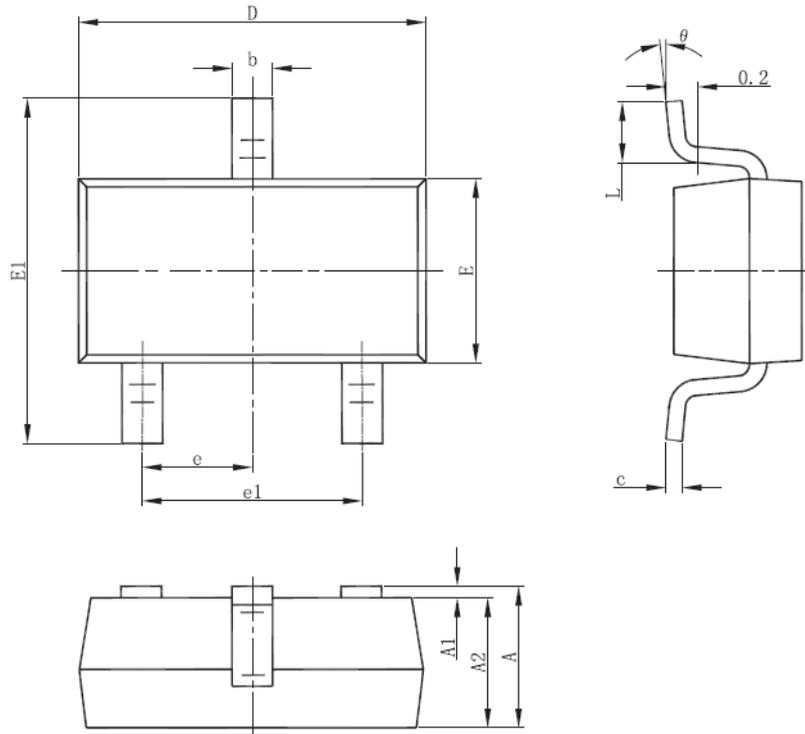• SOT-23-3


| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min | Max | Min | Max |
| A | 1.050 | 1.250 | 0.041 | 0.049 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 1.050 | 1.150 | 0.041 | 0.045 |
| b | 0.300 | 0.500 | 0.012 | 0.020 |
| c | 0.100 | 0.200 | 0.004 | 0.008 |
| D | 2.820 | 3.020 | 0.111 | 0.119 |
| E | 1.500 | 1.700 | 0.059 | 0.067 |
| E1 | 2.650 | 2.950 | 0.104 | 0.116 |
| e | 0.950(BSC) | | 0.037(BSC) | |
| e1 | 1.800 | 2.000 | 0.071 | 0.079 |
| L | 0.300 | 0.600 | 0.012 | 0.024 |
| θ | 0° | 8° | 0° | 8° |

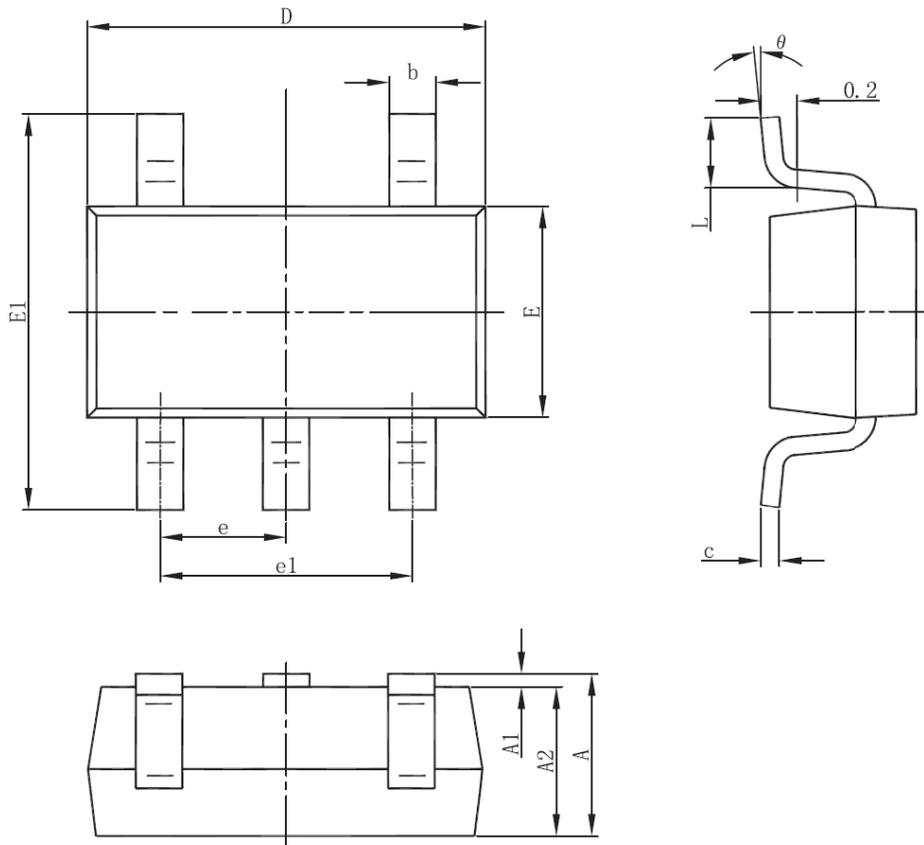
• SOT-23-5


| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min | Max | Min | Max |
| A | 1.050 | 1.250 | 0.041 | 0.049 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 1.050 | 1.150 | 0.041 | 0.045 |
| b | 0.300 | 0.500 | 0.012 | 0.020 |
| c | 0.100 | 0.200 | 0.004 | 0.008 |
| D | 2.820 | 3.020 | 0.111 | 0.119 |
| E | 1.500 | 1.700 | 0.059 | 0.067 |
| E1 | 2.650 | 2.950 | 0.104 | 0.116 |
| e | 0.950(BSC) | | 0.037(BSC) | |
| e1 | 1.800 | 2.000 | 0.071 | 0.079 |
| L | 0.300 | 0.600 | 0.012 | 0.024 |
| θ | 0° | 8° | 0° | 8° |

• SOT-23-6


| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|----------|---------------------------|-------|----------------------|-------|
| | Min | Max | Min | Max |
| A | 1.050 | 1.250 | 0.041 | 0.049 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 1.050 | 1.150 | 0.041 | 0.045 |
| b | 0.300 | 0.500 | 0.012 | 0.020 |
| c | 0.100 | 0.200 | 0.004 | 0.008 |
| D | 2.820 | 3.020 | 0.111 | 0.119 |
| E | 1.500 | 1.700 | 0.059 | 0.067 |
| E1 | 2.650 | 2.950 | 0.104 | 0.116 |
| e | 0.950(BSC) | | 0.037(BSC) | |
| e1 | 1.800 | 2.000 | 0.071 | 0.079 |
| L | 0.300 | 0.600 | 0.012 | 0.024 |
| θ | 0° | 8° | 0° | 8° |

• SOT-89-3

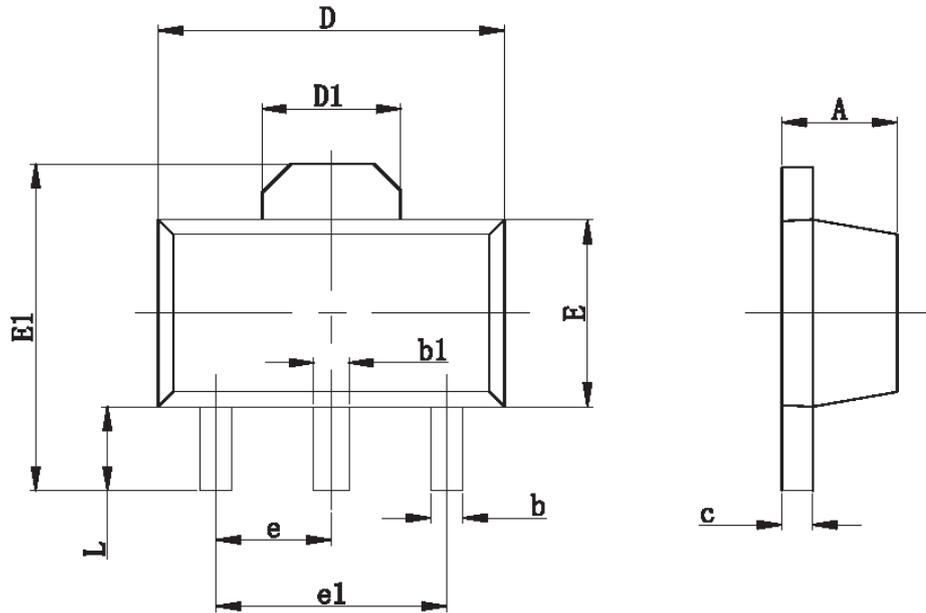

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min | Max | Min | Max |
| A | 1.400 | 1.600 | 0.055 | 0.063 |
| b | 0.320 | 0.520 | 0.013 | 0.197 |
| b1 | 0.400 | 0.580 | 0.016 | 0.023 |
| c | 0.350 | 0.440 | 0.014 | 0.017 |
| D | 4.400 | 4.600 | 0.173 | 0.181 |
| D1 | 1.550 REF | | 0.061 REF | |
| E | 2.300 | 2.600 | 0.091 | 0.102 |
| E1 | 3.940 | 4.250 | 0.155 | 0.167 |
| e | 1.500 TYP | | 0.060TYP | |
| e1 | 3.000 TYP | | 0.118TYP | |
| L | 0.900 | 1.200 | 0.035 | 0.047 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Supervisory Circuits](#) category:

Click to view products by [Leshan](#) manufacturer:

Other Similar products are found below :

[CAT1161LI-25-G](#) [CAT853STBI-T3](#) [DS1232L](#) [NCV302HSN45T1G](#) [STM6710FWB7F](#) [S-1000N28-I4T1U](#) [S-1000N23-I4T1U](#) [S-1000N19-I4T1U](#) [PT7M6133NLTA3EX](#) [PT7M6127NLTA3EX](#) [ISL88708IB829Z](#) [ISL88011IH526Z-TK](#) [ISL88013IH529Z-TK](#) [ISL88705IP846Z](#) [ISL88706IP831Z](#) [ISL88708IB844Z](#) [ISL88708IP831Z](#) [TCM811MERCCTR](#) [X40420S14-A](#) [X40421S14-C](#) [X40430S14-A](#) [X40430S14I-A](#) [X40430S14I-B](#) [X40431S14-A](#) [X40431S14-B](#) [X40431S14-C](#) [X40431S14I-A](#) [X40431S14I-B](#) [X40431S14I-C](#) [X4043P-2.7](#) [X4043PI-2.7](#) [X4043S8-2.7T1](#) [X4043S8IZ-2.7](#) [X4043S8IZT1](#) [X4043S8T1](#) [X4045P](#) [X4045PI](#) [X4045PI-2.7](#) [X4045S8-2.7T1](#) [X4045S8IZ](#) [X4045S8T1](#) [X4163P](#) [X4163P-2.7](#) [X4163PI](#) [X4163PI-2.7](#) [X4163S8](#) [X4165P](#) [X4165P-2.7](#) [X4165PI](#) [X4165PI-2.7](#)