

# BC556/557/558(PNP)

TO-92 Bipolar Transistors



**TO-92**




1. COLLECTOR
2. BASE
3. EMITTER

## Features

- ◇ High Voltage
- ◇ Complement to BC546/BC547/BC548

### MAXIMUM RATINGS (T<sub>A</sub>=25°C unless otherwise noted)

Symbol	Parameter	Value	Units
V <sub>CBO</sub>	Collector-Base Voltage BC556	-80	V
	BC557	-50	
	BC558	-30	
V <sub>CEO</sub>	Collector-Emitter Voltage	-65	V
		-45	
		-30	
V <sub>EBO</sub>	Emitter-Base Voltage	-5	V
I <sub>C</sub>	Collector Current -Continuous	-100	mA
P <sub>C</sub>	Collector Power Dissipation	625	mW
T <sub>J</sub>	Junction Temperature	150	°C
T <sub>stg</sub>	Storage Temperature	-55-150	°C

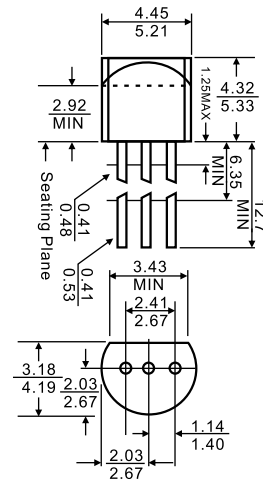

Dimensions in inches and (millimeters)

### ELECTRICAL CHARACTERISTICS (T<sub>amb</sub>=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	V <sub>CBO</sub>	I <sub>C</sub> = -100μA, I <sub>E</sub> =0	BC556	-80		V
			BC557	-50		
			BC558	-30		
Collector-emitter breakdown voltage	V <sub>CEO</sub>	I <sub>C</sub> = -2mA, I <sub>B</sub> =0	BC556	-65		V
			BC557	-45		
			BC558	-30		
Emitter-base breakdown voltage	V <sub>EBO</sub>	I <sub>E</sub> = -100μA, I <sub>C</sub> =0	-5		V	
Collector cut-off current	I <sub>CBO</sub>	V <sub>CB</sub> = -70 V, I <sub>E</sub> =0 V <sub>CB</sub> = -45 V, I <sub>E</sub> =0 V <sub>CB</sub> = -25V, I <sub>E</sub> =0			-0.1	μA
			BC556			
			BC557 BC558			
Collector cut-off current	I <sub>CEO</sub>	V <sub>CE</sub> = -60 V, I <sub>B</sub> =0 V <sub>CE</sub> = -40 V, I <sub>B</sub> =0 V <sub>CE</sub> = -25 V, I <sub>B</sub> =0			-0.1	μA
			BC556			
			BC557 BC558			
Emitter cut-off current	I <sub>EBO</sub>	V <sub>EB</sub> = -5 V, I <sub>C</sub> =0			-0.1	μA
DC current gain	h <sub>FE</sub>	V <sub>CE</sub> =-5V, I <sub>C</sub> = -2mA	BC556	120	800	
			BC557	120	800	
			BC558	120	800	
			BC557A	120	220	
			BC556B/BC557B/BC558B	180	460	
			BC557C	420	800	
Collector-emitter saturation voltage	V <sub>CE(sat)</sub>	I <sub>C</sub> =-100mA, I <sub>B</sub> = -5mA			-0.65	V
Base-emitter saturation voltage	V <sub>BE(sat)</sub>	I <sub>C</sub> = -100mA, I <sub>B</sub> =-5mA			-1	V
Transition frequency	f <sub>T</sub>	V <sub>CE</sub> = -5V, I <sub>C</sub> = -10mA f = 100MHz	150			MHz


# BC556/557/558(PNP)

TO-92 Bipolar Transistors




## Typical Characteristics


### BC557/BC558

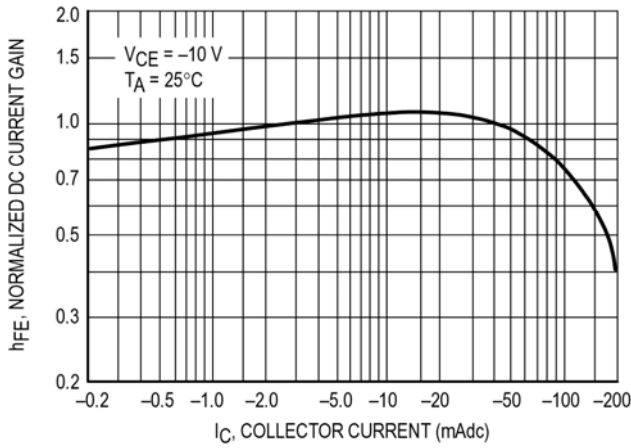


Normalized DC Current Gain

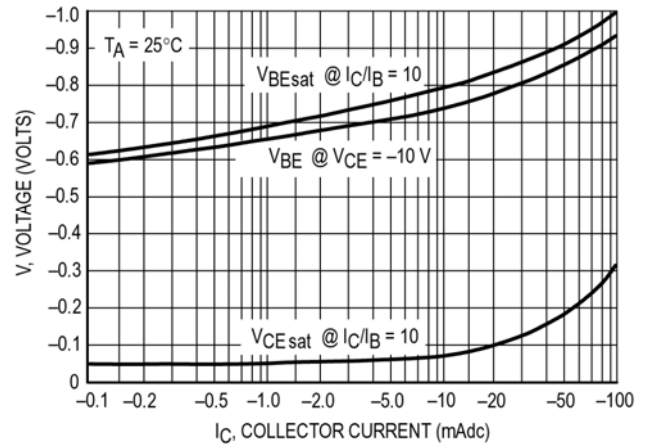


"Saturation" and "On" Voltages

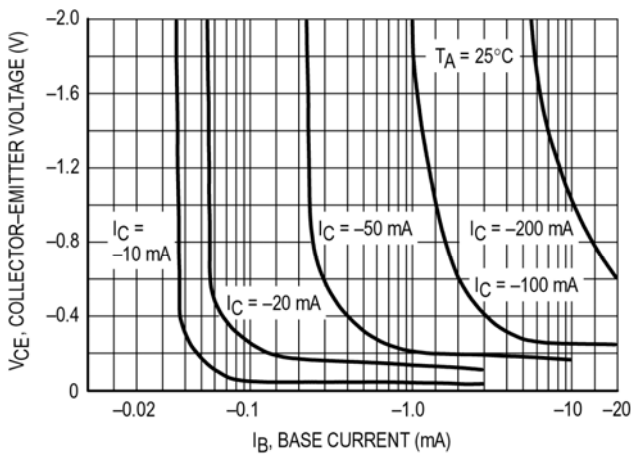


Collector Saturation Region

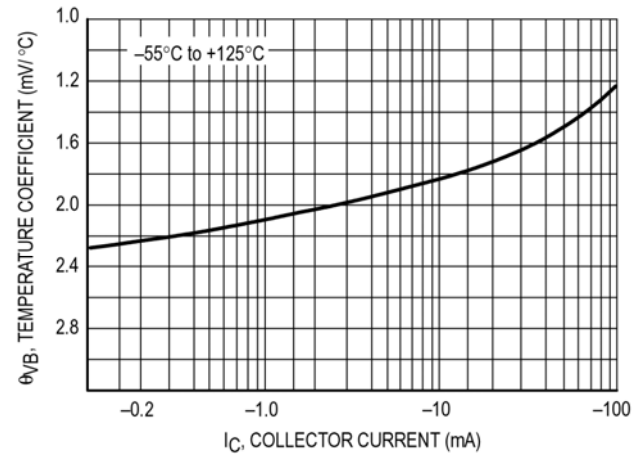

Base-Emitter Temperature Coefficient

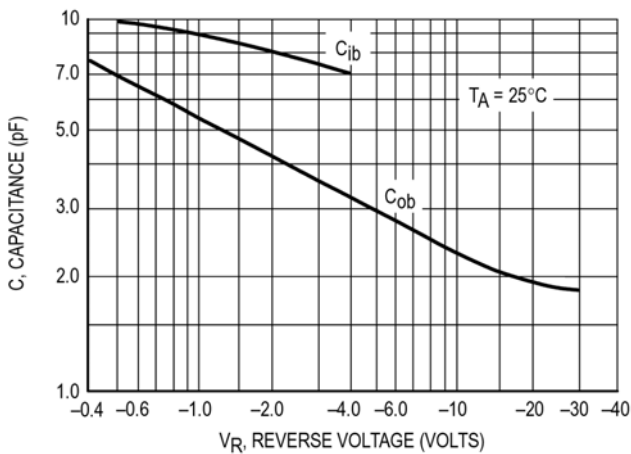

Capacitances

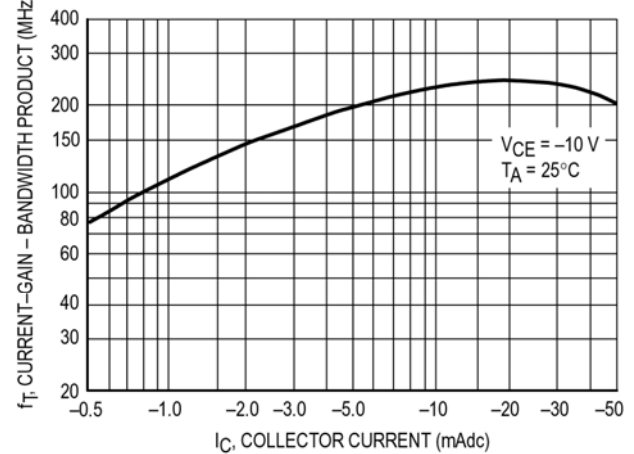


Current-Gain Bandwidth Product

# BC556/557/558(PNP)


TO-92 Bipolar Transistors




## BC556

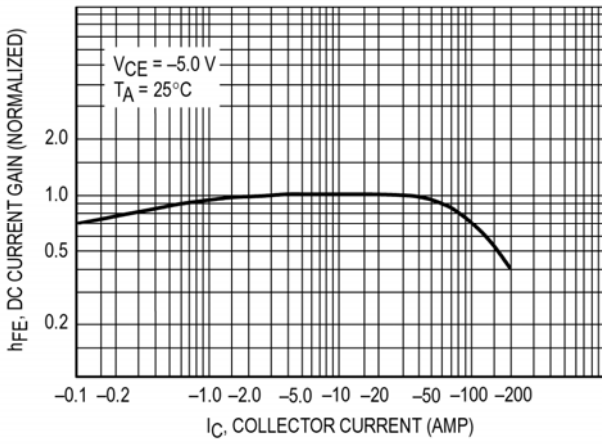


DC Current Gain

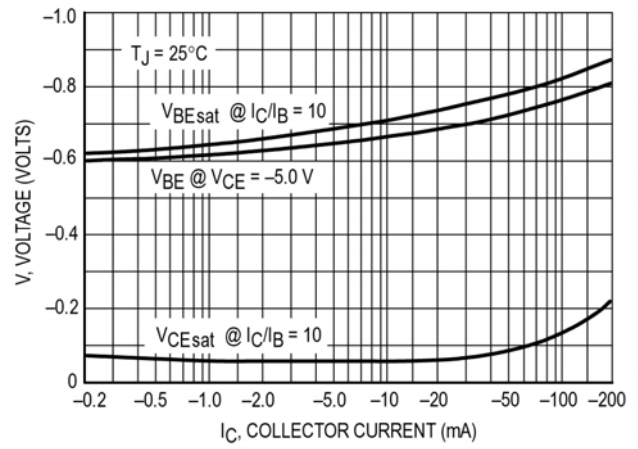


"On" Voltage

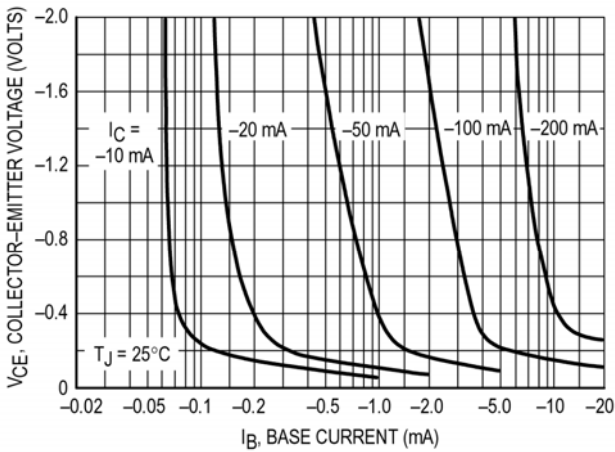


Collector Saturation Region

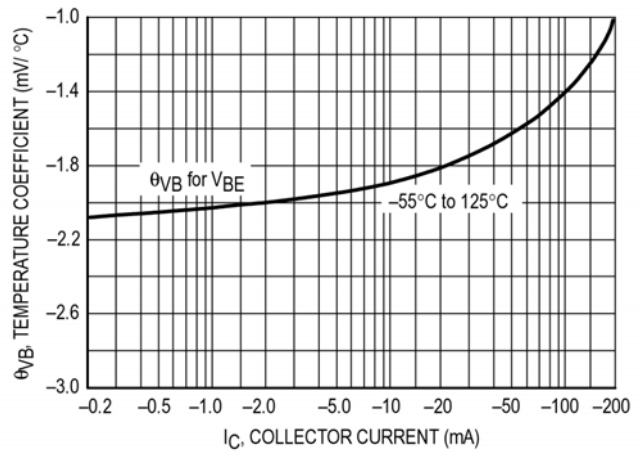

Base-Emitter Temperature Coefficient

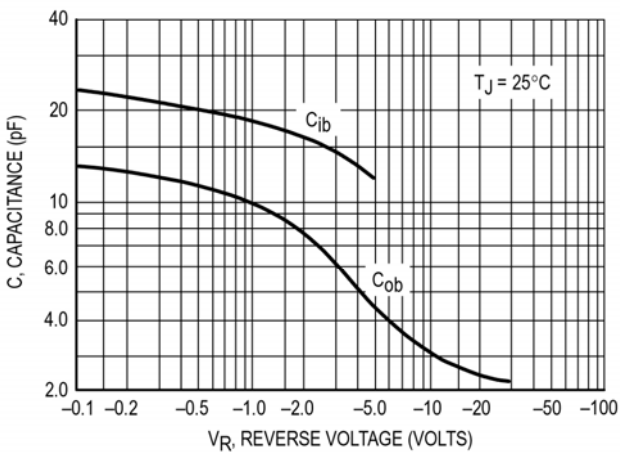

Capacitance

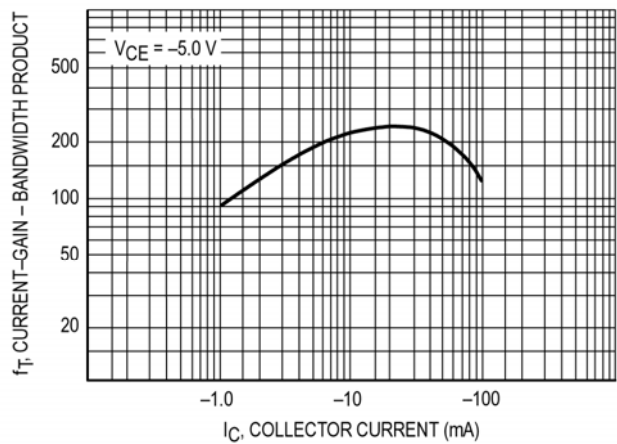


Current-Gain - Bandwidth Product

# BC556/557/558(PNP)


TO-92 Bipolar Transistors




## BC556

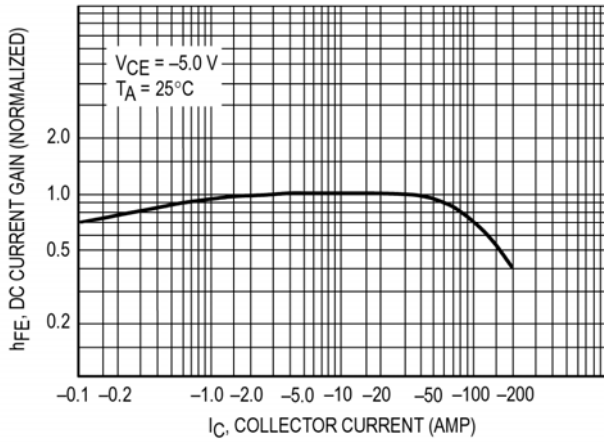


DC Current Gain

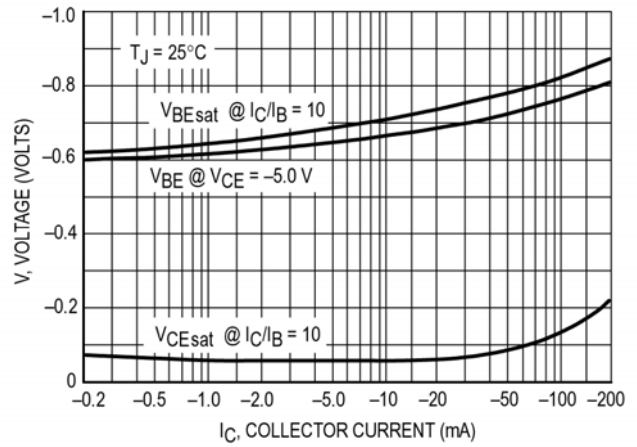


"On" Voltage

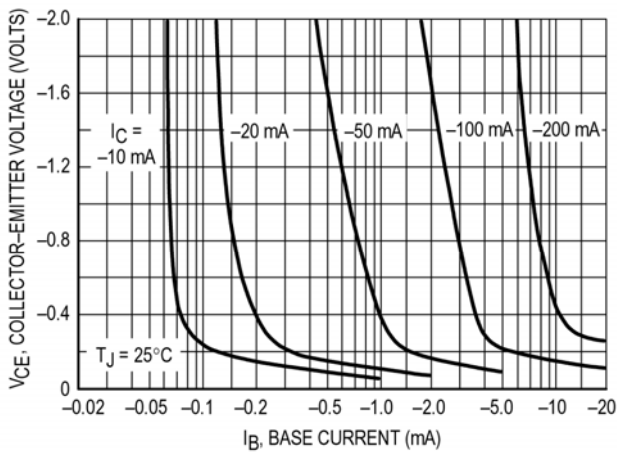


Collector Saturation Region

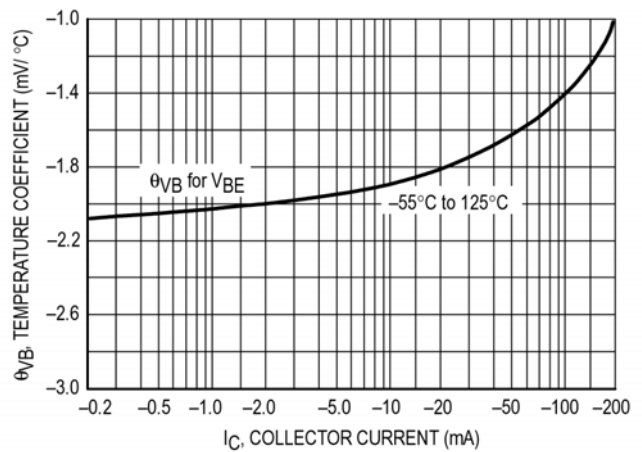

Base-Emitter Temperature Coefficient

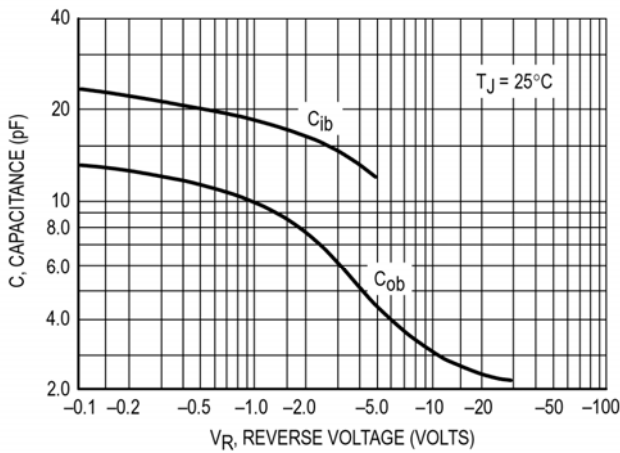

Capacitance

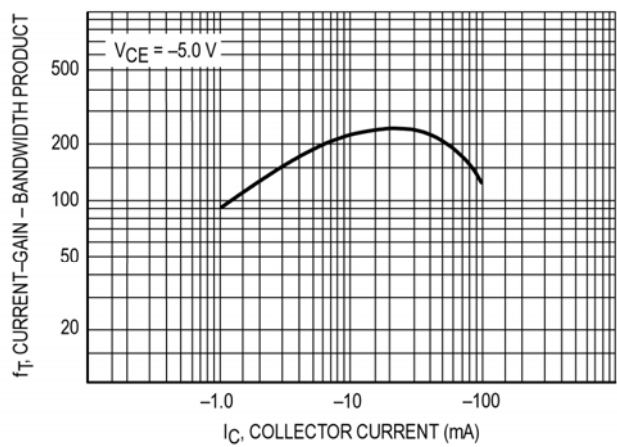

Current-Gain - Bandwidth Product

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [LGE manufacturer](#):*

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)  
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)  
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)  
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)  
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)  
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)