

MODEL No.	LENGTH	MODEL No.	LENGTH
FL0975	750±10	FL0910	10000±60
FL09150	1500±10	FL0915	15000±100
FL093	3000±20	FL0920	20000±100
FL096	6000±40		

REVISION								
REV	DESCRIPTION	DATE	SIGNATURE					
Α	Initial release	2014.04.15	CXM					

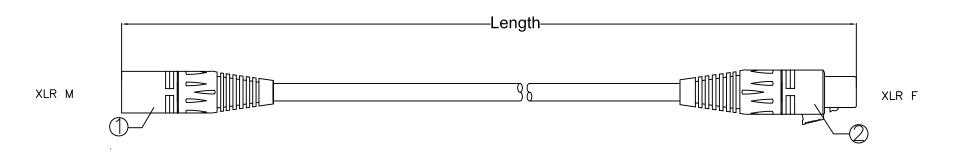



-Conductor: 18/0.10 Bare copper


-Insulation: PE, Ø1.9±0.05mm,Red/White


-Shield1: Cotton Paper

-Fill: Cotton

-Shield2: 16/8/0.12 Bare copper,Braiding

-jacket: PVC(204-888-58), Black



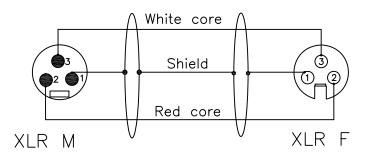

Wiring Method

(G) (D) (4)											
(5)											
4						TITLE	VI F	0		DRAWING No	o. SHEET
						XLR Cable				1/1	
2	305-035-HL	5PIN XLR(F) Assembly	1	Zn alloy	Ni-Plated	UNIT	SCALE	TOL UNLESS NOTED	APPROVED BY	CHECKED BY	DRAWN BY
<u>)</u> @(1)	305-036-HL	3PIN XLR(M) Assembly	1	Zn alloy	Ni-Plated	mm	Eroo	±0.1			CXM
Nφ	PART No.	COMPONENTS	QΤΥ	MATERIAL	FINISH	mm	Free	10.1			2014.04.15

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for dap audio manufacturer:

Other Similar products are found below:

FL-08-1,5