


DESCRIPTION

Designed and tested for repetitive peak operation required for CD ignition, fuel ignitors, flash circuits, motor controls and low-power switching applications.

Features

- 150 Amperes for 2ms Safe Area
- High dv/dt
- Very Low On state voltage at High Current
- Low-Cost TO-92

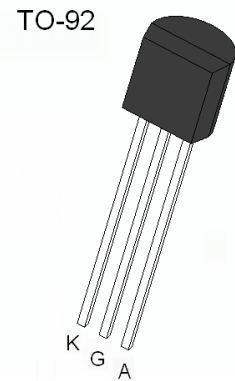

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Value		Unit
		MCR22-6G	MCR22-8G	
Peak Repetitive Forward Voltage	V_{DRM}	400	600	V
Reverse Blocking Voltage	V_{RRM}	400	600	V
On-State Current	$I_{T(RMS)}$	1.5		A
Peak Forward Surge Current	I_{TSM}	15		A
Circuit Fusing Considerations (t = 8.3 ms)	I^2t	0.9		A ² S
Peak Reverse Gate Voltage	V_{GRM}	5		V
Peak Gate Current	I_{GM}	0.1		A
Gate Dissipation	$P_{G(AV)}$	0.1		W
Storage Temperature	T_J, T_{STG}	-40 ~ +125		°C

Electrical Characteristics (Ta=25°C)

Parameter		Symbol	Conditions	Value		Unit
				Min	Max	
Peak Forward and Reverse Blocking Voltage	MCR22-6G	V_{DRM}, V_{RRM}	$V_{AK} = 400V$ $V_{AK} = 600V$	400		V
	MCR22-8G			600		
Peak Forward and Reverse Blocking Current	MCR22-6G	I_{DRM}, I_{RRM}	$V_{AK} = 400V$ $V_{AK} = 600V$		10	μA
	MCR22-8G					
On state voltage		V_{TM}	$I_{TM} = 1A$		1.7	V
Gate trigger voltage		V_{GT}	$V_{AK} = 7V, R_L = 100\Omega$		0.8	V
Gate trigger current		I_{GT}	$V_{AK} = 7V, R_L = 100\Omega$		200	μA
Holding current		I_H	$V_{AK} = 12V$		5	mA

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Triacs](#) category:

Click to view products by [LGE](#) manufacturer:

Other Similar products are found below :

[BT137-600-0Q](#) [2N6075A](#) [NTE5688](#) [D31410](#) [ACS102-5T1](#) [ACS102-5TA](#) [MAC97A4G](#) [Z0107MAG](#) [Z0107MARL1G](#) [Z0109MARLRPG](#)
[BTA316-800ET,127](#) [BTA316-800CTQ](#) [ACTT8X-800CTNQ](#) [MCR22-6G](#) [BTA16-800B\(MS\)](#) [TYN1025RG-JSM](#) [BT138-600D](#) [BTA26-800BRG](#) [BT138-600E](#) [BTA24-600CWRG](#) [BTA16-800CWRG](#) [BT138-600E](#) [BTA08-800CW](#) [BTB24-800CW](#) [BTA16-800CW](#) [BTA16-600CW](#) [BT169](#) [MCR100-6U](#) [FT10050-12P](#) [BT136-800E](#) [BT136S](#) [PCR606J](#) [CT404D-800S](#) [JST24A-800CW](#) [JST60IS-1600BW](#)
[TYN810RG-JSM](#) [BT139B-600E-JSM](#) [TYN812RG-JSM](#) [BTB16-800BRG-JSM](#) [BTA20-800CRG TO-220](#) [BTA16-800BRG](#) [BTW69-1200RG](#)
[TYN825RG-JSM](#) [BTA12-600CRG](#) [BT136-600E](#) [BTA12-600BRG](#) [BT139-600E](#) [BTA24-800CRG TO-220](#) [BTA16-800BWRG](#) [BTA26-600BWRG](#)