

## CSB-RGFB-102-UFFR

### RP-SMA Bulkhead Jack to U.FL Plug Cable Assembly

The CSB-RGFB-102-UFFR cable assembly provides an RP-SMA jack (male pin) to MHF1/U.FL-type plug (female socket) connection on 102 mm of RG-178 coaxial cable.

Operating from 0 Hz to 6 GHz, the CSB-RGFB-102-UFFR cable assembly combines superior performance, compact size, and convenient snap-on and threaded mating interfaces to provide a reliable, easy-to-use cable assembly. Additionally, all Linx coaxial cables and connectors meet RoHS lead free standards and are tested to meet requirements for corrosion resistance, vibration, mechanical and thermal shock.



#### Features

- 0 Hz to 6 GHz operation
- RP-SMA jack (male pin)
  - Gold plated
  - Gold plated brass washer and 1/4"-36UNS hex nut provided
- U.FL-type plug (female socket) compatible with:
  - MHF1, AMC, UMCC
- RG-178 coaxial cable

#### Applications

- LPWA
  - LoRaWAN®, Sigfox®, WiFi HaLow™ (802.11ah)
- Cellular IoT – LTE-M (Cat-M1), NB-IoT
- Cellular – 5G/4G LTE/3G/2G
- PC, LAN
- ISM – Bluetooth®, ZigBee®
- GNSS – GPS, Galileo, GLONASS, BeiDou, QZSS
- Automotive, Industrial, Commercial, Enterprise

**Table 1. Electrical Specifications**

| Parameter               | Value       |
|-------------------------|-------------|
| Insertion Loss (dB max) | 1.6         |
| VSWR (max)              | 2.0         |
| Impedance               | 50 Ω        |
| Insulation Resistance   | 500 MΩ min. |

#### Ordering Information

| Part Number              | Description   |
|--------------------------|---|
| <b>CSB-RGFB-102-UFFR</b> | RP-SMA bulkhead jack (male pin) to U.FL/MHF1-type plug (female socket) on 102 mm (4.0 in) of RG-178 coaxial cable |

Available from Linx Technologies and select distributors and representatives.

Product Dimensions

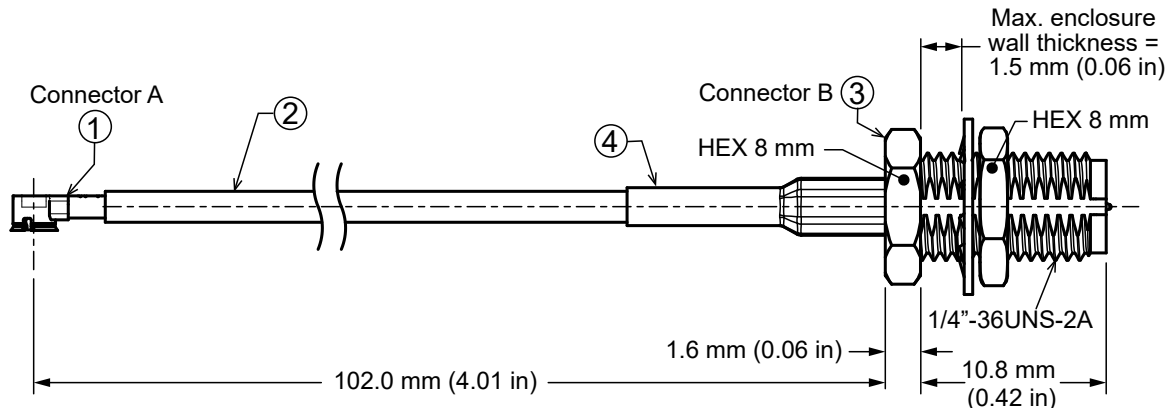


Figure 1. Product Dimensions for the CSB-RGFB-102-UFFR Cable Assembly

Table 2. Cable Assembly Components

| Item # | Description  | Material | Finish  |
|--------|--|----------|---------|
| 1      | Connector, U.FL-type plug (female socket)                          | Brass    | Gold    |
| 2      | RG-178 coaxial cable   | RG-178   | Natural |
| 3      | Connector, RP-SMA bulkhead jack (male pin) with hex nut and washer | Brass    | Gold    |
| 4      | Heat Shrink Tubing   | PTFE     | Black   |

Table 3. Cable Assembly Mechanical Specifications

| Parameter              | Connector A<br>U.FL-type plug (female socket) | Connector B<br>RP-SMA bulkhead jack (male pin) |
|------------------------|---|--|
| Fastening Type         | Snap-on coupling                              | 1/4\"-36 UNS-2A threaded coupling              |
| Recommended Torque     | –   | 0.9 N m (8.0 in lbs)                           |
| Coupling Nut Retention | –   | 60 lbs. min.                                   |
| Connector Durability   | 30 cycles min.                                | 500 cycles min.                                |
| Weight                 | 3.6 g (0.13 oz)                               |  |

Recommended Mounting

Figure 2 shows the recommended mounting hole dimensions for the RP-SMA connector (bulkhead) end of the cable assembly. Hex nut torque should not exceed 10.0 in/lbs max or damage may occur to threads. The max enclosure wall thickness = 1.5 mm (0.06 in).

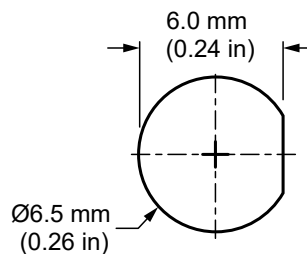


Figure 2. Recommended Mounting Hole Dimensions for the CSB-RGFB-102-UFFR Cable Assembly

Coaxial Cable Specifications

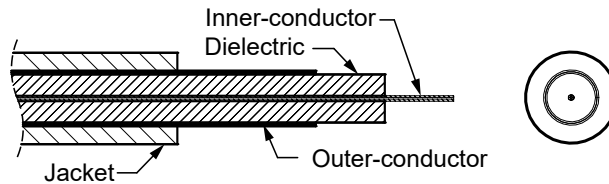


Figure 3. Coaxial Cable Cutaway Diagram

Table 4. Coaxial Cable Material Specifications for RG-178

| Parameter       | Material   | Dimensions                  |
|-----------------|--|-----------------------------|
| Inner-Conductor | Silver plated copper, 7 strand x Ø0.102 mm       | Ø0.085 mm (0.003 in)        |
| Dielectric      | FEP, natural                                     | Ø0.306 mm (0.012 in)        |
| Outer-Conductor | Silver plated copper braid, 3/0.10, coverage 90% | Ø1.3 mm (0.05 in)           |
| Jacket          | FEP, brown                                       | Ø1.78 mm (0.07 in) ±0.05 mm |

Table 5. Coaxial Cable Electrical and Physical Specifications for RG-178

| Parameter                       | Value             |                |              |               |               |               |               |              |
|---------------------------------|-------------------|----------------|--------------|---------------|---------------|---------------|---------------|--------------|
| Rated Temp Voltage              | 105 °C 30 V       |                |              |               |               |               |               |              |
| Nominal Impedance               | 50 ± 3 Ω          |                |              |               |               |               |               |              |
| Nominal Capacitance             | 96 ± 3 pF/m       |                |              |               |               |               |               |              |
| Nominal Velocity of Propagation | 70%               |                |              |               |               |               |               |              |
| Attenuation (dB/1M)             | 0.1 GHz<br>0.52   | 0.4 GHz<br>1.2 | 1 GHz<br>1.7 | 2 GHz<br>2.42 | 3 GHz<br>3.08 | 4 GHz<br>3.63 | 5 GHz<br>4.15 | 6 GHz<br>4.8 |
| Minimum Inside Bend radius      | 10.0 mm (0.04 in) |                |              |               |               |               |               |              |

Insertion Loss

Figure 4 shows the Insertion Loss for CSB-RGFB-102-UFFR cable assembly. Insertion loss is the loss of signal power (gain) resulting from the insertion of a device in a transmission line.

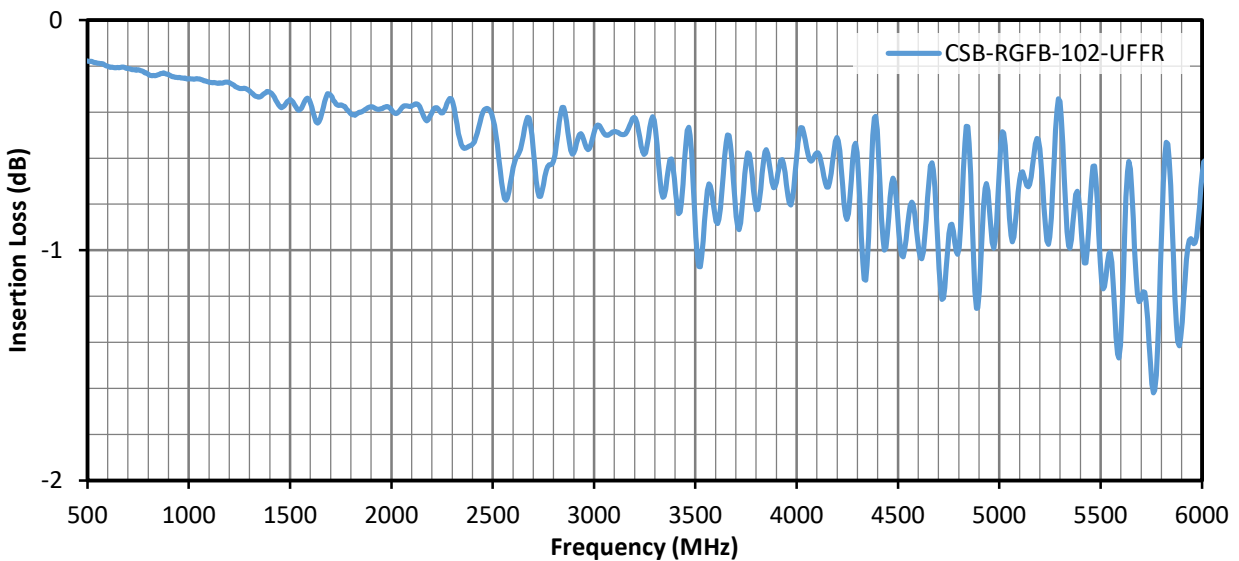


Figure 4. Insertion Loss for the CSB-RGFB-102-UFFR Cable Assembly

VSWR

Figure 5 provides the voltage standing wave ratio (VSWR) across the cable assembly’s bandwidth for the CSB-RGFB-102-UFFR cable assembly. VSWR describes how efficiently power is transmitted through the cable assembly. A lower VSWR value indicates better performance at a given frequency.

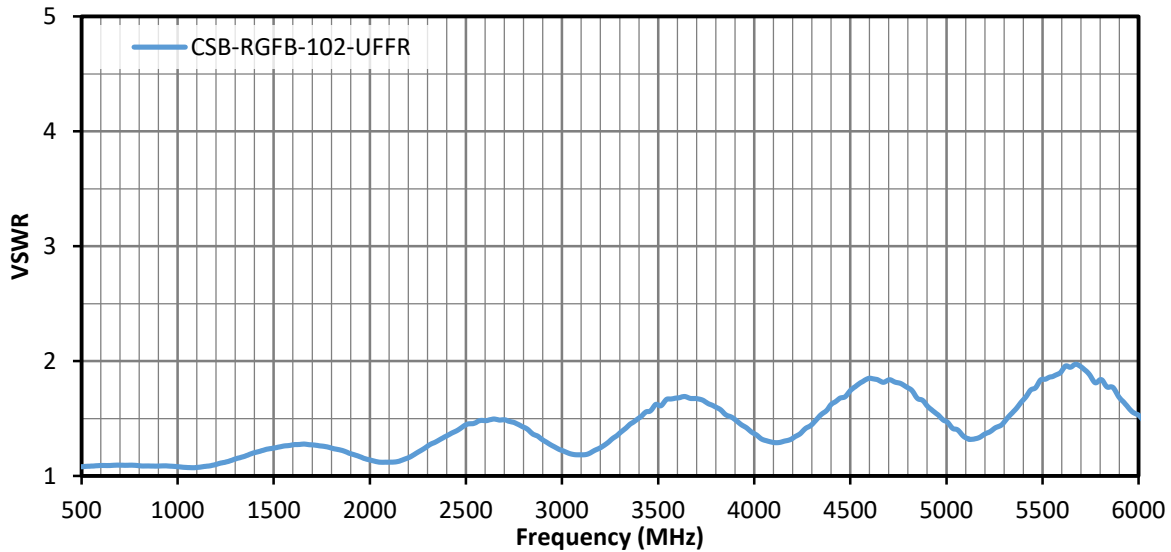


Figure 5. VSWR for the CSB-RGFB-102-UFFR Cable Assembly

Packaging Information

The CSB-RGFB-102-UFFR cable assembly is packaged in a clear plastic bag, in quantities of 100. Distribution channels may offer alternative packaging options.

### Cable Assembly Definitions and Useful Formulas

VSWR - Voltage Standing Wave Ratio. VSWR is a unitless ratio that describes how efficiently power is transmitted through the cable assembly. A lower VSWR value indicates better performance at a given frequency. VSWR is easily derived from Return Loss.

$$VSWR = \frac{10^{\left[\frac{\text{Return Loss}}{20}\right]} + 1}{10^{\left[\frac{\text{Return Loss}}{20}\right]} - 1}$$

Insertion Loss - The loss of signal power (gain) resulting from the insertion of a device in a transmission line. Insertion loss can be derived from the power transmitted to the load before the insertion of the component  $P_T$  and the power transmitted to the load after the insertion of the component  $P_R$ .

$$\text{Insertion Loss (dB)} = 10 \log_{10} \frac{P_T}{P_R}$$

---

**Website:** <http://linxtechnologies.com>  
**Linx Offices:** 159 Ort Lane, Merlin, OR, US 97532  
**Phone:** +1 (541) 471-6256  
**E-MAIL:** [info@linxtechnologies.com](mailto:info@linxtechnologies.com)

---

Linx Technologies reserves the right to make changes to the product(s) or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Wireless Made Simple is a registered trademark of Linx Acquisitions LLC. Other product and brand names may be trademarks or registered trademarks of their respective owners.

Copyright © 2022 Linx Technologies

All Rights Reserved

Doc# DS22160-236CON



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF Cable Assemblies](#) category:*

*Click to view products by [Linx Technologies](#) manufacturer:*

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [73-6364-6](#) [MDM-21SH011F](#) [R285001001](#) [R288940004](#) [145111-05-12.00](#) [1661-C-24](#) [24P104C24J1-012](#)  
[24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-50](#) [24P103C24P2-003](#) [PTWY-24-78](#)  
[R285001021](#) [R285426000](#) [R288940003](#) [R288940008](#) [R288940034](#) [MDM-21PH006P-A174](#) [4814-BB-24](#) [5260-72](#) [DLP-COAX1](#) [4814-K-48](#)  
[115101-09-06.00](#) [MXHT83QE3000](#) [73-6351-25](#) [73-6352-3](#) [73-6353-25](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#) [R284C0351060](#) [R288940009](#)  
[R284C0351028](#) [R288940002](#) [MDM-15SH006A](#) [73-6353-10](#) [R285020301W](#) [BNC TO SMA Cable](#) [MIKROE-274](#) [Minibend-10](#) [Microbend](#)  
[MTR-11](#) [PT815NN](#) [MF53/1x8A\\_21MXP/11SK/305](#) [Minibend-3](#) [Minibend-6.5](#)