


PAL Fuses - 295 Series

Rated 32 V DC

RoHS

Specifications

| | |
|-------------------------------------|-----------------|
| Voltage Rating: | 32 V DC |
| Current Cycling: | 24°C |
| Operating Temperature Range: | -40°C to +125°C |
| Complies with | ISO 8820-4 |

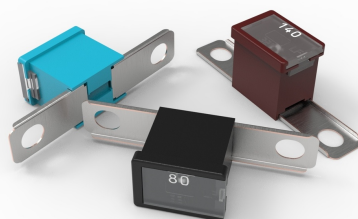

PAL Fuses - 295 Series

Description

Many Japanese automakers use 295 Series Auto Link PAL fuses as original equipment. These bolt-down fuses typically protect alternators and starters. During tests, each of the 295 Series PAL fuses met its performance requirements when receiving 50 % of its ampere rating for 10 000 cycles when current flowed for 5 minutes and was shut off for 10 minutes. The tests were conducted while the temperature of the bolt-down cartridge fuse was 24 °C.

Features & Benefits

- Color coding indicates ampere rating
- Transparent covers make it easier to see when fuses blow
- Bolt securely in place

Applications

- Cars made in Japan and the United States

Ordering Information

| Part Number | Package Size |
|-------------|--------------|
| 0295xxx.H | 100 |
| 0295xxx.U | 500 |
| 0295xxx.MXJ | 1000 |

PAL Fuses - 295 Series

Rated 32 V DC


Ratings

| Part Number | Current Rating (A) | Body Color |
|-------------|--------------------|---------------|
| 0295020._ | 20 | LIGHT BLUE |
| 0295030._ | 30 | PINK |
| 0295040._ | 40 | GREEN |
| 0295050._ | 50 | RED |
| 0295060._ | 60 | YELLOW |
| 0295070._ | 70 | BROWN |
| 0295080._ | 80 | BLACK |
| 0295100._ | 100 | BLUE |
| 0295120._ | 120 | WHITE |
| 0295140._ | 140 | REDDISH BROWN |

(Average Initial Measurements)

Dimensions

Dimensions in mm

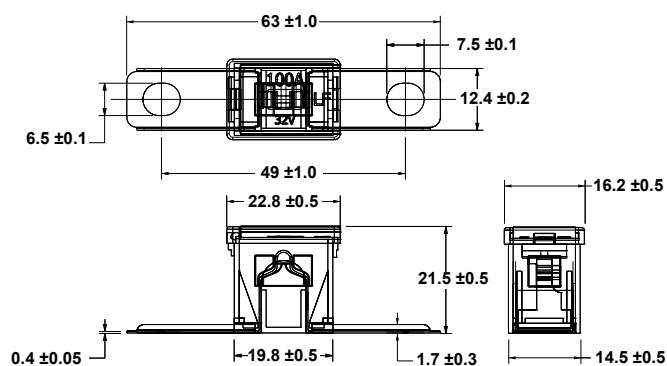

PAL Fuses - 295 Series

Rated 32 V DC

Time-Current Characteristics

| % of Rating | Opening Time Min / Max (s) |
|-------------|----------------------------|
| 110 | 14,400 |
| 200 | 5 / 100 |
| 350 | 0.2 / 7 |
| 600 | 0.040 / 1 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Automotive Fuses](#) category:

Click to view products by [Littelfuse](#) manufacturer:

Other Similar products are found below :

[ATM-4LP](#) [299080](#) [HBO-70](#) [0287015](#) [FMM-15](#) [0297003.WXT](#) [0695060.PXPS](#) [MRBF-075](#) [MRBF-300](#) [MRBF-200](#) [ANX80-UL-20A](#)
[ANX80-UL-25A](#) [ANX80-UL-30A](#) [ANX80-UL-35A](#) [ANX80-UL-40A](#) [ANT-I-3A](#) [APM-I-25A](#) [APR-10A](#) [APR-25A](#) [ANX58-UL-20A](#)
[ANX58-UL-25A](#) [ANX58-UL-35A](#) [ANX58-UL-40A](#) [ANX58-UL-50A](#) [ANM-4A](#) [ANM-25A](#) [ANE-175A](#) [APM-25A](#) [APM-4A](#) [ACB2-PL-](#)
[15A](#) [ACB2-PL-25A](#) [ANM58-15A](#) [ANM58-5A](#) [FMX-LP-20A](#) [MIDA-50A](#) [0695040.PXP](#) [0327030.YX2T](#) [0298500.UX1M8](#) [0299070.ZXT](#)
[20A32V](#) [ATM-1](#) [MRBF-040](#) [MRBF-100](#) [MRBF-250](#) [MRBF-050](#) [MRBF-060](#) [CFCOVER-2R](#) [MRBF-030](#) [3298600.ZXM10](#) [AMG-80](#)