



Zhuhai Lizhi Technology Co., Ltd  
Sales@lyztec.com  
0756-6358688  
www.lyztec.com

# 客户承认书

## SPECIFICATION FOR APPROVAL

**CUSTOMER/客户:** \_\_\_\_\_

**CUSTOMER P.N./客户物料号:** \_\_\_\_\_

**MODEL NO./产品型号:** \_\_\_\_\_ **LRS-50-12**

**PRODUCT NO./产品编号:** \_\_\_\_\_ **50W 12V/4.16A**

**SAMPLE DATE/送样日期:** \_\_\_\_\_ **2021-7-29**

**CUSTOMER AUTHORIZED SIGNATURE/客户承认签核**

|  |  |  |
|--|--|--|
|  |  |  |
|--|--|--|

Please return to us one copy of “SPECIFICATION FOR APPROVAL” with you approved signature./客户确认签字，盖章后请回传一份承认书给我司。

|      |        |        |      |
|------|--------|--------|------|
| 拟 制: | 安规工程师: | 项目工程师: | 批 准: |
|------|--------|--------|------|

## \*\* Table Of Content/目录 \*\*

|      |  |   |
|------|--|---|
| 1.   | Functional description/功能描述 .....                          | 3 |
| 2.   | SCOPE/简述 .....   | 3 |
| 2.1. | Description/产品类型 .....                                     | 3 |
| 3.   | Input Characteristics/输入特性 .....                           | 3 |
| 3.1. | Input Voltage & Frequency/输入电压与频率 .....                    | 3 |
| 3.2. | Input AC Current/AC 输入电流 .....                             | 3 |
| 3.3. | Inrush Current (cold start)/浪涌电流(冷启动) .....                | 4 |
| 3.4. | Type Efficiency/典型效率 .....                                 | 4 |
| 3.5. | Energy Consumption /空载功耗 .....                             | 4 |
| 4.   | Output Characteristics/输出特性 .....                          | 4 |
| 4.1. | Static Output Characteristics <Vo & R+N>/静态输出特性 .....      | 4 |
| 4.2. | Line/ Load Regulation/线性/负载调整率 .....                       | 4 |
| 4.3. | Turn - on Delay Time/开机延迟时间 .....                          | 4 |
| 4.4. | Hold-up Time/关机维持时间 .....                                  | 4 |
| 4.5. | Rise Time/上升时间 .....                                       | 4 |
| 4.6. | Fall Time/下降时间 .....                                       | 4 |
| 4.7. | Output Overshoot / Undershoot/输出过冲/欠冲 .....                | 4 |
| 4.8. | Output Load Transient Response/输出负载瞬态响应 .....              | 5 |
| 5.   | Protection Requirements/保护要求 .....                         | 5 |
| 5.1. | Over Current Protection/过流保护 .....                         | 5 |
| 5.2. | Short Circuit Protection/短路保护 .....                        | 5 |
| 5.3. | Over Voltage Protection/过压保护 .....                         | 5 |
| 5.4. | Over temperature protection/过温保护 .....                     | 5 |
| 6.   | Environment Requirements/环境要求 .....                        | 5 |
| 6.1. | Operating Temperature and Relative Humidity/操作温/湿度要求 ..... | 5 |
| 6.2. | Storage Temperature and Relative Humidity/存储温/湿度要求 .....   | 5 |
|      | Sea level shall be low 2.000 meters/低于 2000                |   |
| 6.3. | 米 .....  | 5 |
| 6.4. | Vibration/振动 .....   | 5 |
| 7.   | Reliability Requirements/可靠性要求 .....                       | 6 |
| 7.1. | Burn-in/老化 .....   | 6 |
| 7.2. | E-caps lifetime .....                                      | 7 |
| 7.3. | MTBF : .....   | 7 |
| 8.   | EMI/EMS Standards/EMI/EMS 标准 .....                         | 7 |
| 8.1. | EMI Standards/EMI 标准 .....                                 | 7 |
| 8.2. | EMS Standards/EMS 标准 .....                                 | 8 |
| 9.   | Safety Standards/安规标准 .....                                | 8 |
| 10.  | Mechanical Outline Drawing/外观示意图 .....                     | 9 |

## 1. Functional description/功能描述

LRS-50-12 is a 50W output closed-type power supply with a 30mm thin design and a wide input voltage range of 90 ~ 264Vac. The output voltage is single channel 12V, and the peak efficiency is as high as 90%. It is designed with an aluminum casing for good heat dissipation. The power supply has a variety of protection functions, such as input under-voltage protection, output over-current protection, output over-voltage protection and temperature protection. It conforms to the harmonics requirement of EN 61000-3-2. It provides a high performance and cost-effective solution for various engineering applications.

LRS-50-12 是一款 **50W** 12V 输出封闭型电源供应器，具有 **30mm** 薄外型设计，宽输入电压范围 **90~264Vac**。输出电压为 12V, 峰值**效率高达 88%**；采用铝外壳设计且具有很好的散热效果。该电源具有多种保护功能，如输入欠压保护、输出过流保护、输出过压保护；符合 **EN61000-3-2** 谐波要求；为各种工程应用提供了一个高性能和高性价比的解决方案。

## 2. SCOPE/简述

The document detail the electrical, mechanical and environmental specifications of a SMPS, the power supply provide 50W continuous output power.

资料详细描述了一款 **50W** (连续输出功率)开关电源的电气性,结构性及环境等要求。

The power supply shall meet the **RoHS** requirement.

此款电源符合 **RoHS** 要求。

### 2.1. Description/产品类型

SMPS Adaptor(Wall mount)/插墙式适配器

SMPS Adaptor(Desk-top)/桌面型适配器

Open Frame/开放式结构

SMPS Unit (With Case)/带铝壳型

Others/其他

## 3. Input Characteristics/输入特性

### 3.1. Input Voltage & Frequency/输入电压与频率

The range of input voltage is from 90Vac to 264Vac single phase, switching the input voltage through a switch.

输入电压范围：从 **90Vac** 到 **264Vac**, 单相输入,通过开关切换输入电压。

| Items                | Min/最小 | Nom/额定值     | Max/最大  |
|----------------------|--------|-------------|---------|
| Input Voltage/输入电压   | 90 Vac | 100~240 Vac | 264 Vac |
| Input Frequency/输入频率 | 47 Hz  | 50~60 Hz    | 63 Hz   |

### 3.2. Input AC Current/AC 输入电流

|                          |          |          |           |
|--------------------------|----------|----------|-----------|
| Input Voltage/输入电压       | 115Vac   | 230Vac   | Full load |
| Input AC Current/AC 输入电流 | 1.0A Max | 0.5A Max | Full load |

### 3.3. Inrush Current (cold start)/浪涌电流(冷启动)

The energy of inrush current should not be over the  $I^2T$  of fuse & bridge diodes.

冷启动时，浪涌能量不能超过整流桥和保险丝的  $I^2T$ ，且不能有损坏。

### 3.4. Type Efficiency/典型效率

86% min.(average efficiency). @ 115Vac/60Hz input .

88% min.(average efficiency). @ 230Vac/50Hz input.

输入电压 115V/60Hz 时，平均效率不低于 86%。

输入电压 230V/50Hz 时，平均效率不低于 90%。

### 3.5. Energy Consumption /空载功耗

No load Consumption  $\leq 3W$ (230Vac/50Hz).

在额定输入 230Vac/50Hz 时,空载功耗 $\leq 3W$ 。

## 4. Output Characteristics/输出特性

### 4.1. Static Output Characteristics <Vo & R+N>/静态输出特性

| Output | Rated Load/额定负载 |           | Output Range<br>输出电压范围 | R+N<br>纹波与噪声 | OCP<br>过流点 |
|--------|-----------------|-----------|------------------------|--------------|------------|
| Rate   | Min. Load       | Rate.Load |                        |              |            |
| +12V   | 0.0A            | 4.16A     | 11.4V ~ 12.6V          | 200mVp-p     | 5.8A       |

Ripple & Noise: Measurement is done by 20MHz bandwidth oscilloscope and the output paralleled a 0.1uF ceramic capacitor and a 10uF electrolytic capacitor. (test under the condition of rated input and rated output).

纹波与噪声：量测时示波器选用 20MHz 带宽限制,输出端要并联一颗 0.1uF 的陶瓷电容和一颗 10uF 的电解电容。(在额定输入及输出的条件下检测)。

### 4.2. Line/ Load Regulation/线性/负载调整率

| Output | Load Condition/负载条件 |           | Line Regulation | Load Regulation | OCP  |
|--------|---------------------|-----------|-----------------|-----------------|------|
| Rate   | Min. Load           | Rate.Load | 线性调整率           | 负载调整率           | 过流点  |
| +12V   | 0.0A                | 4.16A     | $\pm 3\%$       | $\pm 3\%$       | 5.8A |
|        |                     |           |                 |                 |      |

### 4.3. Turn - on Delay Time/开机延迟时间

3S max. @ 115Vac to 230Vac input & Full load.

输入电压 115Vac to 230Vac 满载时，开机延迟时间不超过 3S。

### 4.4. Hold-up Time/关机维持时间

10mS min. @ Full load &115Vac/60Hz input turn off at worst case.

输入电压 115Vac/60Hz 满载时，关机时间最差情况不小于 10 毫秒。

10mS min. @ Full load &230Vac/50Hz input turn off at worst case.

输入电压 230Vac/50Hz 满载时，关机时间最差情况不小于 10 毫秒。

### 4.5. Rise Time/上升时间

80 mS max. @ Full load &115Vac/60Hz and 230Vac/50Hz input.

在 115Vac/60Hz 和 230Vac/50Hz 输入满载时，上升时间不超过 80 毫秒。

### 4.6. Fall Time/下降时间

30 mS max. @ Full load.

满载时，下降时间不超过 30 毫秒。

### 4.7. Output Overshoot / Undershoot/输出过冲/欠冲

10 % max. When the power on or off, when it is the full input voltage and full load.

开关机时，输出过冲/欠冲均不大于 10%。

### 4.8. Output Load Transient Response/输出负载瞬态响应

Output voltage within 11.4V ~ 12.6V for load step from 25% to 50% to 25%,50% to 75% to 50% R/S: 0.25A/uS, Transient Response Recovery Time :200uS, Dynamic response overshoot 10%.

输出电压在 11.4V ~ 12.6V 之间,负载变化: 从 25% to 50% to 25%, 50% to 75% to 50%斜率: 0.25A/uS, 动态响应恢复时间: 20mS, 动态响应过冲±10%。

## 5. Protection Requirements/保护要求

### 5.1. Over Current Protection/过流保护

Over Power Point Limited: 105%~140% Full load (@115/230Vac)

过流保护点限制:105%~140% 满载 (115~230Vac)

The output shall hiccup when the over current applied to the output rail, and

shall be self-recovery when the fault condition is removed.

当过流作用于输出时, 输出将锁死, 当故障情况消除时, 重新启动恢复。

### 5.2. Short Circuit Protection/短路保护

The input power shall decrease when the output short.the power supply shall no damage, and shall be auto-recovery when the fault condition is removed.

当输出短路时, 输入功率应减小。电源不应损坏, 故障排除后重新启动恢复。

### 5.3. Over Voltage Protection/过压保护

In the case of 90 ~ 264Vac input space time load and full load,10V < OVP < 17V, and can not be damaged.

在 90~264Vac 输入时空载和满载情况下, 输出过压保护大于 10V, 小于 17V, 且不能损坏。

### 5.4. Over temperature protection/过温保护

When the temperature exceeds 110±5°C, turn off the output voltage and automatically recover when the temperature drops to 75 °C.

当温度超过 110±5°C 时, 关闭输出电压, 温度下降到 75 °C 后自动恢复。

## 6. Environment Requirements/环境要求

### 6.1. Operating Temperature and Relative Humidity/操作温/湿度要求

Operating temperature:-30°C to +70°C

工作温度: -30°C to +70°C

Operating Relative humidity:10%RH to 90%RH

工作湿度: 10%RH to 90%RH

### 6.2. Storage Temperature and Relative Humidity/存储温/湿度要求

Storage Temperature:-40°C to +80°C

储存温度: -40°C to +85°C

Storage relative humidity:10%RH to 95%RH non-condensing

存储湿度: 10%RH to 95%RH

### 6.3. Sea level shall be low 2.000 meters/低于 2000 米.

### 6.4. Vibration/振动

10 to 500Hz sweep at a constant acceleration of 2.0G(Displacement amplitude: 3.5mm),10 minutes per cycle, 60 minutes on the X, Y and Z axis.

以 2.0G 恒定加速度(位移幅值:3.5mm)扫频 10 - 500Hz, 每循环 10 分钟, X、Y、Z 轴 60 分钟。

## 7. Reliability Requirements/可靠性要求

### 7.1. Burn-in/老化

The power supply shall be burn-in for 2 Hours under rated input and 80% Full load at 40°C  
±5°C.

电源在 40°C ±5°C 额定输入、80% 满负荷情况下老化 2 小时。

### 7.2. E-caps lifetime

The E-caps used in this power supply must be with lifetime of 3 years @ 25°C of full load. @ 200Vac / 60Hz and / or 240Vac /50Hz.

本电源使用的电解电容寿命必须在 25°C 满负荷时使用寿命为 3 年。@ 200Vac / 60Hz 和/或 240Vac /50Hz。

### 7.3. MTBF :

≥200 K Hrs MIL-HDBK-217F (25°C).

平均无故障时间 20 万小时以上，标准 MIL-HDBK-217F (25°C)。

## 8. EMI/EMS Standards/EMI/EMS 标准

### 8.1. EMI Standards/EMI 标准

| EMI                 | Standards                          | Margin Measurements |
|---------------------|------------------------------------|---------------------|
| Radiated Emission   | EN55032 EN55035 GB/T9254 GB17625.1 | ≥3dB                |
| Conduction Emission | EN55032 EN55035 GB/T9254 GB17625.1 | ≥3dB                |

### 8.2. EMS Standards/EMS 标准

#### 8.2.1. EN 61000-4-2, electrostatic discharge(ESD) requirement/静电抗扰度要求

| Discharge characteristic/静电规格 | Test level/测试条件 | Test criteria/测试标准 |
|-------------------------------|-----------------|--------------------|
| Air discharge/空气放电            | +/- 8KV         | A                  |
| Contact discharge/接触放电        | +/- 4KV         | A                  |

#### 8.2.2. EN 61000-4-3, radiated electromagnetic field susceptibility(rs)/辐射骚扰场强

| Test level/测试条件                                     | Test criteria/测试标准 |
|---|--------------------|
| 10V/m (r.m.s)<br>30-1000MHz, 80% AM(1KHz) sine-wave | A                  |

#### 8.2.3. EN 61000-4-4, electric fast transients(burst) immunity requirement/电快速瞬变脉冲群

| Coupling/测试端口 | Test level/测试条件 | Test criteria/测试标准 |
|---------------|-----------------|--------------------|
| AC-input/交流输入 | 0.5KV           | A                  |
| AC-input/交流输入 | 1KV             | A                  |

#### 8.2.4. EN 61000-4-5, surge capability requirement/浪涌抗扰度要求

| Surge voltage/雷击电压           | Test criteria/测试标准 |
|------------------------------|--------------------|
| Common mode/共模 +/- 2KV       |                    |
| Differential mode/差模 +/- 4KV | A                  |

#### 8.2.5. EN 61000-4-6, Induced radio frequency fields conducted disturbances immunity requirement/电源端子传导骚扰实验

| Test level/测试条件 | Test criteria/测试标准 |
|-----------------|--------------------|
|-----------------|--------------------|

|                         |   |
|-------------------------|---|
| 3V                      | A |
| 0.15-30 MHz,80%AM(1KHz) |   |

#### 8.2.6. Assessment criteria /评估标准

| Acceptance criteria<br>可接受标准 | Performance<br>性能   |
|------------------------------|---|
| A                            | <p>Agreed operational behavior within the specified limits<br/>性能不允许变化；如果性能会发生变化，则变化的范围在产品规格书规定的范围内。</p>  |
| B                            | <p>Time limited functional diminishment or malfunction during the tests is permitted. The function is self-reactivated by the unit following completion of the tests.<br/>设备在测试过程中,性能降低允许在产品规格书要求范围内,干扰消除后,设备能恢复正常,不允许出现复位和任何方式的人工干预.</p> |
| C                            | <p>Malfunction is permitted .The function can be reactivated either by reconnection to the mains or by operator intervention.<br/>在测试过程中，设备允许出现业务中断，测试完毕后允许自行恢复或者人工干预恢复（包括硬件上干预）；测试中只允许初级防护器件损坏，并且更换损坏的初级防护器件后，设备能恢复正常</p>                |

### 9. Safety Standards/安规标准

#### 9.1. Dielectric Strength(Hi-pot)/介电耐压强度(高压)

I/P- O/P: 3KVac / 5mA max. / 60 second .

输入对输出: **3KVac / 5mA max. / 60 秒.**

I/P-FG: 2KVac / 5 mA max. / 60 second .

输入对地: **2KVac / 5 mA max. / 60 秒**

O/P-FG: 0.5K Vac / 5 mA max. / second.

输出对地: **0.5KVac / 5 mA max. / 60 秒.**

## 9.2. Leakage Current/漏电流

3.5mA max. at 250Vac / 50Hz.

输入 **250V AC**,漏电流小于 **3.5mA**.

## 9.3. Insulation Resistance/绝缘阻抗

I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH


输入对输出、输入对地、输出对地，在 **25°C 70%** 的湿度分别施加 **500Vdc** 进行测试，阻抗大于 **100 兆欧姆**.

## 9.4. Regulatory Standards/安规标准

| Type/安规 | Country/国家 | Standard/标准 | State/状况 | Note/备注 |
|---------|------------|-------------|----------|---------|
| CE      | Europe     | EN62368-1   | Meet     |         |
| FCC     | Europe     | EN62368-1   | Meet     |         |

## 10. Mechanical Outline Drawing/外观示意图

99L\*82W\*30H mm

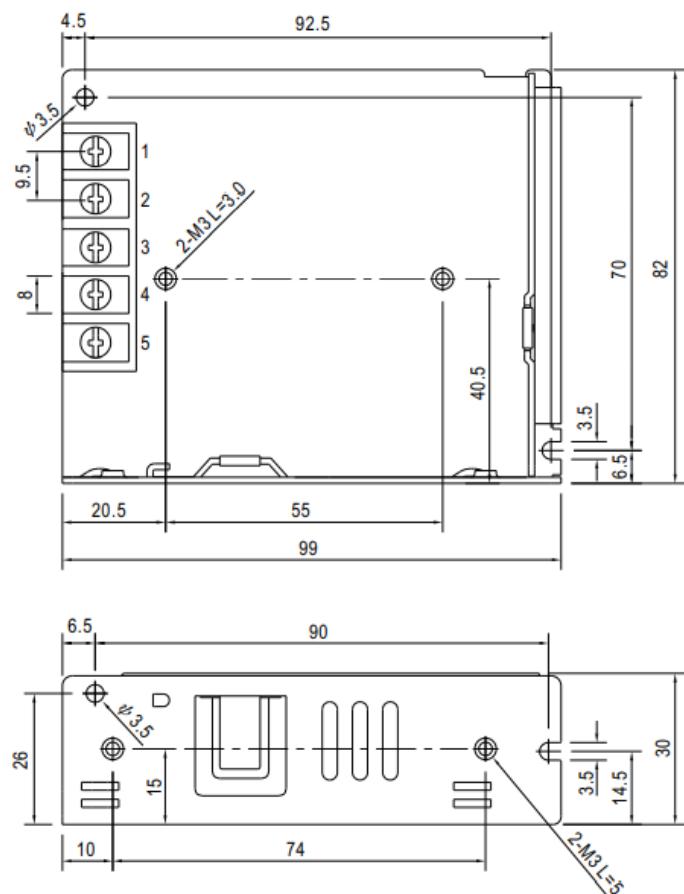

珠海励至科技有限公司  
邮箱: Sales@lyztec.com  
座机: 0756-6358688/  
电话: 13825606075  
网址: www.lyztec.com

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [Switching Power Supplies](#) category:***

***Click to view products by [LZTEC manufacturer:](#)***

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [73-551-0048](#) [EVS57-5R3/A](#) [FAS-002](#) [AAD600S-4-OP](#) [MS924](#) [HWS50A-5/RA](#) [KD0204](#) [9021](#) [LDIN100150](#) [FAP-001](#) [FP80](#) [FRV7000G](#) [22929](#) [CQM1IA121](#) [VI-PU22-EXX](#) [LDIN5075](#) [432703037161](#) [VI-LUL-IU](#) [LPM000-BBAR-08](#) [LPM000-BBAR-07](#) [08-30466-1055G](#) [DMB-EWG](#) [CQM1IPS01](#) [SP-300-5](#) [MAP40-S233](#) [CQM1-IPS02](#) [VI-MUL-ES](#) [22829](#) [08-30466-0028G](#) [96PSR-A460WOTH-2](#) [G06-Q01](#) [GHA300F-12-SNF](#) [MTA040009A](#) [FSA150024A](#) [VI-RUR22-EWXX](#) [VI-PU03-EYW](#) [VI-QCWB3-CSV](#) [HLS30ZE-NT8](#) [UT1404-7](#) [ERP-350-12](#) [S8FSG01512C](#) [VI-PU22-EYY](#) [XPFM201A+](#) [S8FS-G15015C](#) [S8FS-G05005C](#) [S8FS-G03015C](#) [08-30466-020WG](#) [08-30466-1040G](#)