




## Features

- High Output Sensitivity
- Flat Frequency Response
- Burnout Rating: 100 mW for 2086-6000-00  
200 mW for 2086-6010-00
- No Bias Required on 2086-6000-00

## Outline Drawing

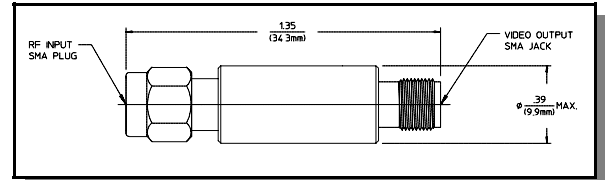


## Specifications

Part Number	2086-6000-00	2086-6010-00
Frequency Range	1.0 - 15.0 GHz	1.0 - 18.0 GHz
Flatness 1	± 1.25 dB Max.	± 1.25 dB Max.
Open Circuit Voltage Sensitivity 1	1500 mV/mW Min.	1500 mV/mW Min.
Tangential Sensitivity 2	-52 dBm Min.	-52 dBm Min.
Output Capacitance	12 pF Typ.	12 pF Typ.
Video Resistance 1	1200 Ohms Typ.	700 Ohms Typ.
Output Polarity	Negative <sup>4</sup>	Negative <sup>4</sup>
Bias Current	—	50 µA Nom.
Temperature Range	-50°C to +125°C	-65°C to +125°C
Temperature Stability	—	± 2.0 dB
Maximum Power	100 mW CW	200 mW CW


1. For RF power levels below -20 dBm, and with an open circuit load.
2. With video amplifier of 1 MHz bandwidth and 2 dB noise figure.
3. Finish is passivated stainless steel.
4. For Positive output change suffix to -13.

Typical Performance Curves


Voltage Output vs. Frequency  
2086-6010-00

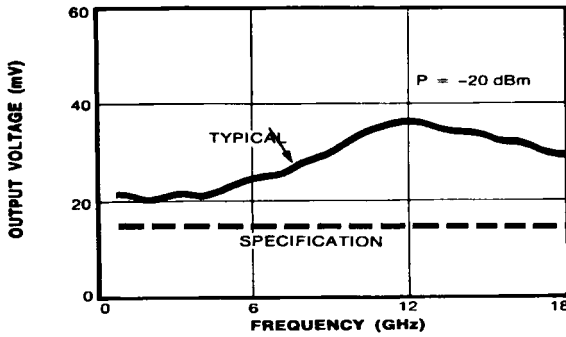


Thermal Stability  
2086-6010-00

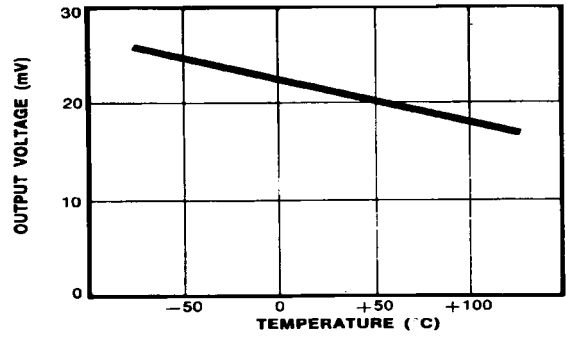


VSWR vs. Bias Current  
2086-6010-00

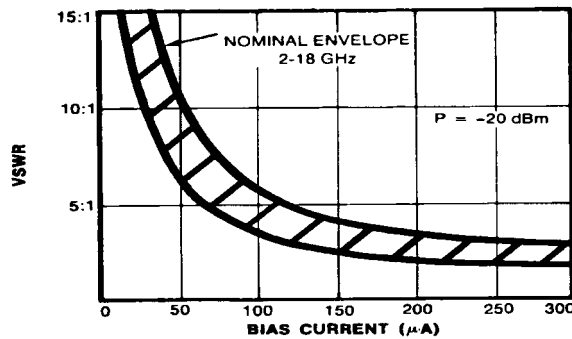


Response Function  
2086-6010-00

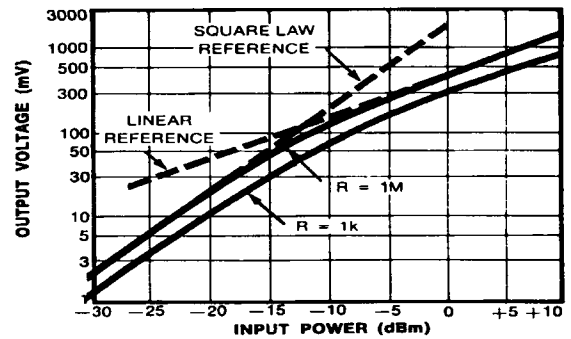

Voltage Output vs. Frequency  
2086-6000-00

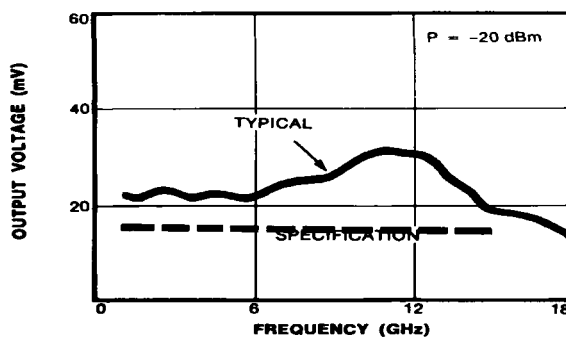

Response Function  
2086-6000-00

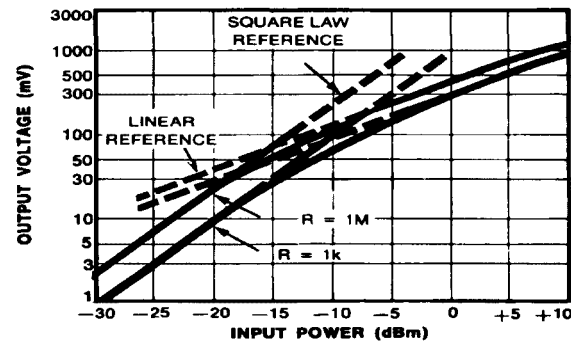

Specifications subject to change without notice.

- North America: Tel. (800) 366-2266
- Asia/Pacific: Tel.+81-44-844-8296, Fax +81-44-844-8298
- Europe: Tel. +44 (1344) 869 595, Fax+44 (1344) 300 020

Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF Detector](#) category:*

*Click to view products by [MACOM](#) manufacturer:*

Other Similar products are found below :

[HMC439QS16GTR](#) [HMC7447-SX](#) [MACP-010562-TR1000](#) [R451075000](#) [2085-6013-13](#) [2085-6010-00](#) [32-2018-BU](#) [32-3033-BU](#) [32-3203-BU](#) [AD8361ARMZ-REEL](#) [LT5534ESC6#TRPBF](#) [AD8361ARM-REEL7](#) [AD8314ARMZ-REEL](#) [AD8311ACBZ-P7](#) [AD8312ACBZ-P7](#) [AD8313ARMZ](#) [AD8313ARMZ-REEL7](#) [AD8314ARMZ](#) [AD8314ARMZ-REEL7](#) [AD8315ARMZ](#) [AD8317ACPZ-R7](#) [AD8319ACPZ-R7](#) [AD8361ARMZ](#) [AD8361ARMZ-REEL7](#) [AD8362ARUZ-REEL7](#) [AD8363ACPZ-R7](#) [AD8302ARUZ-RL7](#) [ADL5906ACPZN-R7](#) [ADL5500ACBZ-P7](#) [ADL5502ACBZ-P7](#) [ADL5504ACBZ-P7](#) [ADL5505ACBZ-P7](#) [ADL5506ACBZ-R7](#) [ADL5506WACBZ-R7](#) [ADL5513ACPZ-R7](#) [ADL5903ACPZN-R7](#) [ADL5903SCPZN-R7](#) [ADL6010ACPZN-R2](#) [ADL6010SCPZN](#) [ADL6010SCPZN-R7](#) [ADL6010SCPZN-R2](#) [ADL6010ACPZN](#) [ADL6012ACPZN](#) [ADL5511ACPZ-R7](#) [ADL5904ACPZN-R7](#) [ADL5910ACPZN-R7](#) [HMC1010LP4E](#) [HMC1010LP4ETR](#) [HMC1021LP4E](#) [HMC1030LP5E](#)