

ACCEPTED BY: _____

PROPOSED BY *J. Sogoya*

*When product will be discontinued, customer will be informed by HITACHI with twelve months prior announcement.

No.	ITEM	SHEET No.	PAGE
1	COVER	7B64PS 2701-TX09D70VM1CCA-4	1-1/1
2	RECORD OF REVISION	7B64PS 2702-TX09D70VM1CCA-4	2-1/2~2/2
3	GENERAL DATA	7B64PS 2703-TX09D70VM1CCA-4	3-1/1
4	ABSOLUTE MAXIMUM RATINGS	7B64PS 2704-TX09D70VM1CCA-4	4-1/2~2/2
5	ELECTRICAL CHARACTERISTICS	7B64PS 2705-TX09D70VM1CCA-4	5-1/2~2/2
6	OPTICAL CHARACTERISTICS	7B64PS 2706-TX09D70VM1CCA-4	6-1/2~2/2
7	BLOCK DIAGRAM	7B64PS 2707-TX09D70VM1CCA-4	7-1/1
8	INTERFACE TIMING CHART	7B64PS 2708-TX09D70VM1CCA-4	8-1/6~6/6
9	DIMENSIONAL OUTLINE	7B63PS 2709-TX09D70VM1CCA-4	9-1/1
10	APPEARANCE STANDARD	7B64PS 2710-TX09D70VM1CCA-4	10-1/4~4/4
11	PRECAUTION IN DESIGN	7B64PS 2711-TX09D70VM1CCA-4	11-1/3~3/3
12	DESIGNATION OF LOT MARK	7B64PS 2712-TX09D70VM1CCA-4	12-1/1
13	PRECAUTION FOR USE	7B64PS 2713-TX09D70VM1CCA-4	13-1/1

CONTENTS **TX09D70VM1CCA**

CUSTOMER'S ACCEPTANCE SPECIFICATIONS

FOR MESSRS : STD

DATE : Feb.17.2006

KAOSHUNG HITACHI
ELECTRONICS CO.,LTD
P.O. BOX 26-27
2,13TH EAST ST. K.E.P.Z.
KAOSHUNG TAIWAN R.O.C.
TEL:(07) 8215811 (7 LINE)
FAX:(07) 821-5815

HITACHI

RECORD OF REVISION

DATE SHEET No.

4.1 ELECTRICAL ABSOLUTE MAXIMUM RATINGS OF LCD

7B64PS 2704-TX09D70VM1CCA-2

PAGE 4-1/2

Revised

ITEM SYMBOL MAX.

LED Forward Current IF 25

LED Pulse Forward Current I_{FP} 80

ITEM SYMBOL MAX.

LED Forward Current IF 35

LED Pulse Forward Current I_{FP} 100

ITEM SYMBOL MAX.

Allowable Forward Current I_F (mA)

Ambient Temperature T_a(°C)

Note 4 :

IFP Conditions : pulse width ≤ 10ms and Duty ≤ 1/10

Allowable Forward Current I_F (mA)

Ambient Temperature T_a(°C)

Note 5 :

IFP Conditions : pulse width ≤ 10ms and Duty ≤ 1/10

Allowable Forward Current I_F (mA)

Ambient Temperature T_a(°C)

5.2 ELECTRICAL CHARACTERISTICS OF BACKLIGHT

Revised

ITEM SYMBOL CONDITION MAX. TYP. MAX.

LED Input Voltage VF IF=20mA

LED Forward Current IF

ITEM SYMBOL CONDITION MAX. TYP. MAX.

LED Input Voltage VF IF=20mA

LED Forward Current IF

ITEM SYMBOL CONDITION MAX. TYP. MAX.

LED Input Voltage VF IF=20mA

LED Forward Current IF

6.1 OPTICAL CHARACTERISTICS OF LCD

Revised the color tone

7B64PS 2705-TX09D70VM1CCA-2

PAGE 6-1/6

7B64PS 2705-TX09D70VM1CCA-2

PAGE 8-6/6

8.5 INTERNAL PIN CONNECTION

Revised the function of PIN35

Added Note1

Sh. No. 7B64PS 2702-TX09D70VM1CCA-4

PAGE 2-1/2

DATE Feb.17,06

KAOSHUNG HITACHI ELECTRONICS CO.,LTD.

7B64PS 2705-TX09D70VM1CCA-2

PAGE 5-1/2

7B64PS 2705-TX09D70VM1CCA-2

PAGE 6-1/6

7B64PS 2705-TX09D70VM1CCA-2

PAGE 8-6/6

7B64PS 2704-TX09D70VM1CCA-2

PAGE 4-1/2

Revised

ITEM SYMBOL MAX.

LED Forward Current IF 25

LED Pulse Forward Current I_{FP} 80

ITEM SYMBOL MAX.

LED Forward Current IF 35

LED Pulse Forward Current I_{FP} 100

ITEM SYMBOL MAX.

Allowable Forward Current I_F (mA)

Ambient Temperature T_a(°C)

RECORD OF REVISION

DATE	SHEET No.	SUMMARY															
Jan.27,'06	7B64PS 2705-TX09D70VM1CCA-3 PAGE 8-3/6	8.3 POWER ON/OFF SEQUENCE Added the waveform of PCI signal															
Feb.17,'06	7B64PS 2705-TX09D70VM1CCA-3 PAGE 8-6/6	8.5 INTERNAL PIN CONNECTION Revised the function of PIN35 Revised Note1															
	7B64PS 2705-TX09D70VM1CCA-4 PAGE 8-1/6	8.1 INTERFACE TIMING Revised <table border="1" style="display: inline-table; vertical-align: middle;"> <tr><td>Horizontal Total</td><td>258</td></tr> <tr><td>Horizontal Sync Start</td><td>246</td></tr> <tr><td>Horizontal Sync End</td><td>250</td></tr> <tr><td>Horizontal Blank Time</td><td>18</td></tr> </table> <table border="1" style="display: inline-table; vertical-align: middle;"> <tr><td>MIN</td><td>265</td></tr> <tr><td>244</td><td>244</td></tr> <tr><td>248</td><td>248</td></tr> <tr><td>25</td><td>25</td></tr> </table>	Horizontal Total	258	Horizontal Sync Start	246	Horizontal Sync End	250	Horizontal Blank Time	18	MIN	265	244	244	248	248	25
Horizontal Total	258																
Horizontal Sync Start	246																
Horizontal Sync End	250																
Horizontal Blank Time	18																
MIN	265																
244	244																
248	248																
25	25																

3. GENERAL DATA

The specifications are applied to the following TFT-LCD (Transmissive with micro reflectance) module with Back-light unit.

(1) Part Name TX09D70VM1CCA

(2) Module Dimensions 64.0(W)mm x 86.0(H)mm x 8.05(D)mm typ.

(3) Effective Display Area 53.64(W)mm x 71.52(H)mm (Diagonal:9cm)

(4) Dot Pitch 0.0745mm x 3(R,G,B)(W) x 0.2235(H)mm

(5) Resolution 240 x 3(R,G,B)(W) x 320 (H) dots

(6) Color Pixel Arrangement R,G,B Vertical Stripe

(7) LCD Type Transmissive Color TFT LCD (Normally White)

(8) Display Type Active Matrix

(9) Number of Colors 262^k Colors (R,G,B 6 Bit Digital each)

(10) Backlight Light Emitting Diode (LED) x 6

(11) Weight (48)g


(12) Interface 40 pin C-MOS

(13) Power Supply Voltage 3.3V only


(Including Timing Controller, LCD and LED Power Unit)

(14) Viewing Direction 6 O'clock (The direction it's hard to be discolored)

(15) Touch Panel Resistance type. The surface is anti-glare.

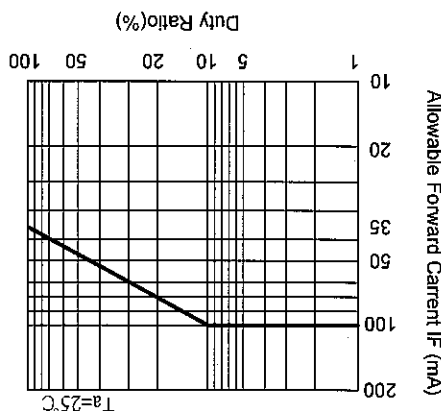

Note 6 : I_{FP} Conditions : pulse width ≤ 10ms and Duty ≤ 1/10

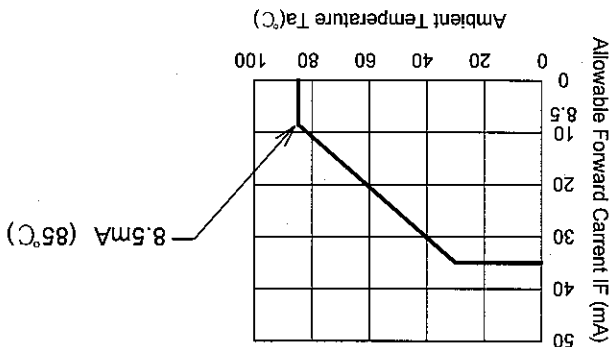

- Note 1 : DTMG, DCLK, RD0~RD5, GD0~GD5, BD0~BD5.
- Note 2 : 200pF-0Ω 25°C -70%RH
- Note 3 : Interface Pin Connector.
- Note 4 : The surface of metal bezel and LCD panel.
- Note 5 :

ITEM	SYMBOL	MIN.	MAX.	UNIT	COMMENT
Power Supply for Logic	VDD	-0.3	4.0	V	
Input Voltage	V _I	-0.3	VDD+0.3		(Note 1)
Input Current	I _I	0	1	A	
Static Electricity	VESD0	-	±100	V	(Note 2,3)
	VESD1	-	(8)	KV	(Note 2,4)
Forward Current	I _F	-	35	mA	(Note 5)
Pulse Forward Current	I _{FP}	-	100	mA	(Note 6)
Reverse Voltage	V _R	-	5	V	

4. ABSOLUTE MAXIMUM RATINGS

4.1 ELECTRICAL ABSOLUTE MAXIMUM RATINGS

VSS=0V

Note 1 : Ta ≤ 40°C : 85%RH max.
 Ta > 40°C : Absolute humidity must be lower than the humidity of 85%RH at 40°C.
 Note 2 : For storage condition Ta at -30°C < 48h , at 80°C < 100h.
 For operating condition Ta at -20°C < 100h
 Note 3 : Background color changes slightly depending on ambient temperature.
 This phenomenon is reversible.
 Note 4 : 5Hz~100Hz(Except resonance frequency)
 Note 5 : This LCM will resume normal operation after finishing the test.
 Note 6 : The response time will be slower as low temperature.
 Note 7 : Only operation is guaranteed at operating temperature. Contrast, response time, another display quality are evaluated at 25°C.
 Note 8 : Pulse Width : 10ms
 Note 9 : This is panel surface temperature , not ambient temperature.
 Note 10 : If LED is driven by high current, the life time of LED will be reduced, also high temperature and high humidity.

ITEM	OPERATING		STORAGE		REMARKS
	Min.	Max.	Min.	Max.	
Ambient Temperature	-20°C	70°C	-30°C	80°C	(Note 2,3,6,7,9,10)
Humidity	(Note 1)		(Note 1)		Without condensation
Vibration	-	2.45m/s ² (0.25G)	-	11.76m/s ² (1.2G)	(Note 4,5)
Shock	-	29.4m/s ² (3G)	-	490m/s ² (50G)	(Note 5,8)
Corrosive Gas	Not Acceptable		Not Acceptable		

4.3 ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

ITEM	SPECIFICATION	UNIT	CONDITION	REMARKS
Supply Voltage	7.0	V	DC	
Endurance Voltage	25	V	DC	(Note 1)

Note 1 : Waiting 1 minute.

4.2 ELECTRICAL ABSOLUTE MAXIMUM RATINGS OF TOUCH PANEL

5. ELECTRICAL CHARACTERISTICS

5.1 ELECTRICAL CHARACTERISTICS OF LCD

Ta=25°C, VSS=0V

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Power Supply Voltage	VDD	-	3.0	3.3	3.6	V
Input voltage for logic (note 1)	VI	"H" level	1.7	-	-	VDD
		"L" level	VSS	-	-	0.7
Power Supply Current (note 2)	IDD	VDD-VSS=3.3V	-	200	-	mA
Vsync Frequency	fV	-	52	60	68	Hz
Hsync Frequency	fH	-	10.92	19.5	22.12	KHz
DCLK Frequency	fCLK	-	4.62	5.33	6.04	MHz

Note 1 : DTMG, DCLK, RD0~RD5, GD0~GD5, BD0~BD5.

Note 2 : fV=60Hz, Ta=25°C, Pattern used as display pattern : All Black.

Note 3 : Need to made sure of flickering and rippling of display when setting the frame frequency in your set.

5.2 ELECTRICAL CHARACTERISTICS OF BACK LIGHT


ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	REMARKS
LED Input Voltage	VF	IF=20mA	-	3.2	3.5	V	LED / Part
LED Forward Current	IF	-	-	20	25	mA	LED / Part
LED Reverse Current	IR	VR=5V	-	-	50	μA	LED / Part
LED Current Control	Vctrl	VDD-VSS=3.3V	0	1.8	4.0	V	(Note 1)

Note 1 : LED current depend on following conditions .

LED current is calculated by Vctrl and VFB when VFB is controlled by Vctrl.


LED : $\frac{VFB}{VFB}$: When Vctrl > 1.8 V

LED : $\frac{Vctrl}{Vctrl}$: When Vctrl > 1 V.

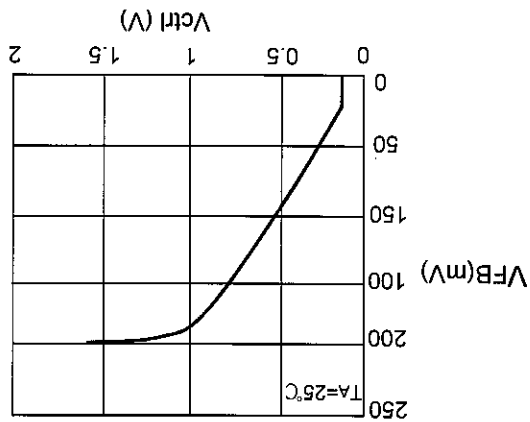


5.4 MECHANICAL CHARACTERISTICS OF TOUCH PANEL


ITEM	SPECIFICATION	UNIT	REMARKS
Pen Input Pressure	0.1 - 1.3	N	R0.8mm Polyacetal pen Note(4)
Surface Hardness	3H min.	-	JIS K 5400

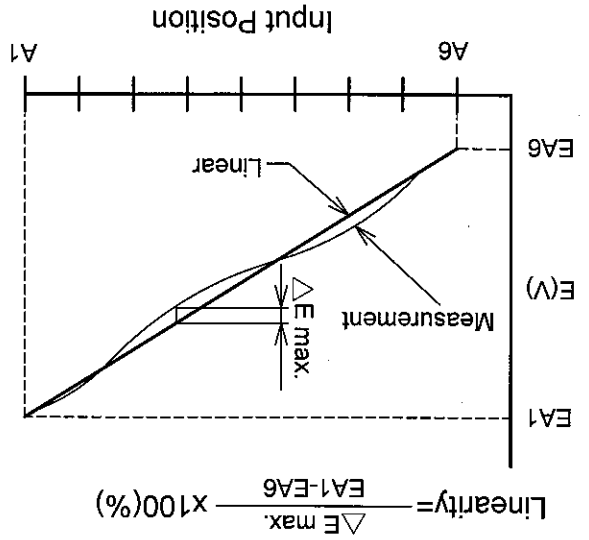

Note 3 : Calculation (a) Y axis linearity

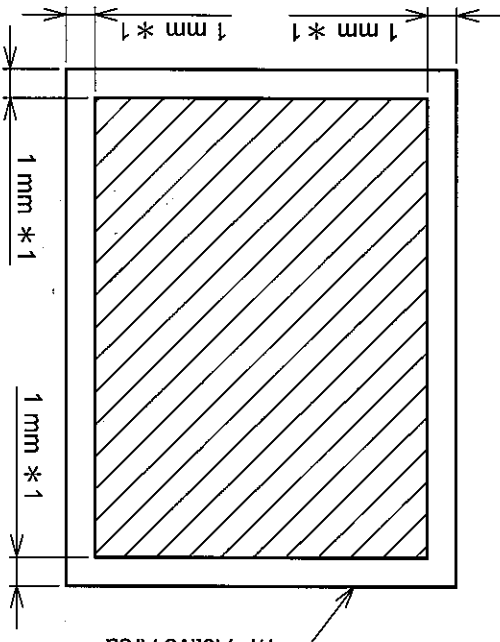

Note (4) Pen Force Area T/P Active Area

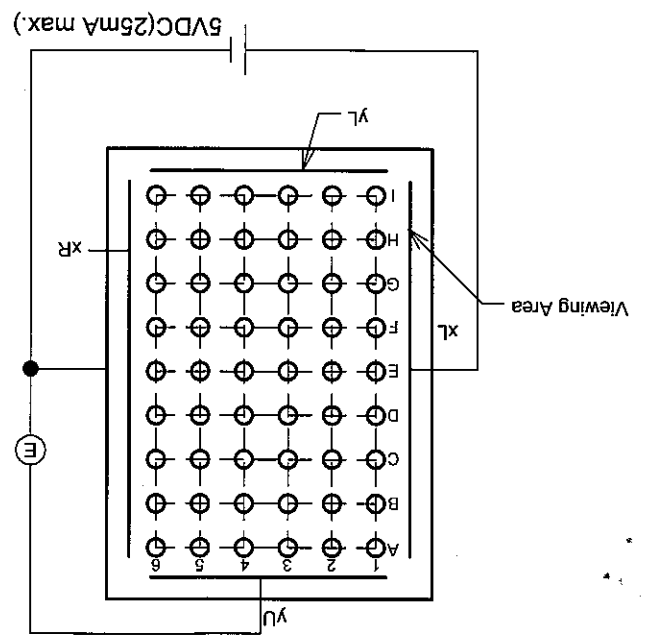

Note 1 : Operating Voltage 25V DC.
 Note 2 : Test Condition.
 (a) Y axis linearity testing method (with tip radius 0.8, polyacetal pen). VXL-XR=5V, VOUT=VYU.

(b) X axis linearity method VYU-YL=5V, VOUT=VXL.

5.3 ELECTRICAL CHARACTERISTICS OF TOUCH PANEL

ITEM	SPECIFICATION	UNIT
Resistance between Terminal XR - XL	200 - 650	ohm
YU - YL	250 - 500	ohm
Insulance Resistance (Note 1)	10M min.	ohm
Linearity (Note 2,3)	x	1.5 max. %
	y	1.5 max. %
Chattering	10 max.	ms

6. OPTICAL CHARACTERISTICS

6.1 OPTICAL CHARACTERISTICS OF LCD (BACK LIGHT ON)

Ta=25°C

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Brightness	B	$\phi = 0^\circ, \theta = 0^\circ$	-	320	-	cd/m ²	(1)
Uniformity	-	$\phi = 0^\circ, \theta = 0^\circ$	70	-	-	%	(2),(3),(4)
Viewing Angle	θ x	$\phi = 0^\circ, K \geq 5.0$	-	70	-	deg	(5),(6)
	θ x'	$\phi = 180^\circ, K \geq 5.0$	-	70	-	deg	
	θ y	$\phi = 90^\circ, K \geq 5.0$	-	80	-	deg	
	θ y'	$\phi = 270^\circ, K \geq 5.0$	-	60	-	deg	
Contrast Ratio	K	$\phi = 0^\circ, \theta = 0^\circ$	180	300	-	-	(4)
Response Time (rise-fall)	tr+tf	$\phi = 0^\circ, \theta = 0^\circ$	-	(30)	-	ms	(8)
Color Tone (Primary Color)	Red	x	0.55	0.60	0.65	-	(4)
		y	0.29	0.34	0.39	-	
	Green	x	0.28	0.33	0.38	-	
		y	0.54	0.59	0.64	-	
	Blue	x	0.09	0.14	0.19	-	
		y	0.07	0.12	0.17	-	
	White	x	0.27	0.32	0.37	-	
		y	0.29	0.34	0.39	-	

(Measurement condition: HITACHI standard)

Note (4)~(7): See page 6-2/2


Note 1: Active area center

Note 2: Driving Condition

Display Pattern: White Raster
LED Current: 20mA / Part


Measurement of the following

5 places on the display.

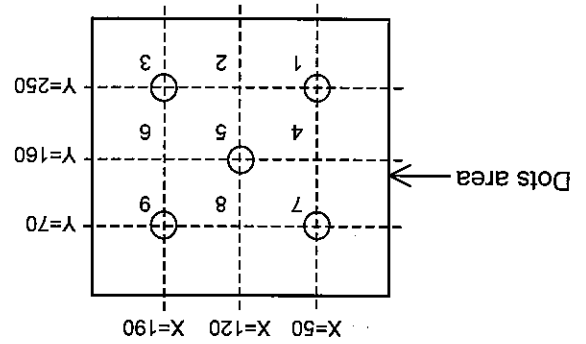

$$\left(\frac{\text{Min. brightness}}{\text{Max. brightness}} \right) \times 100$$


Note 3: Definition of the brightness uniformity

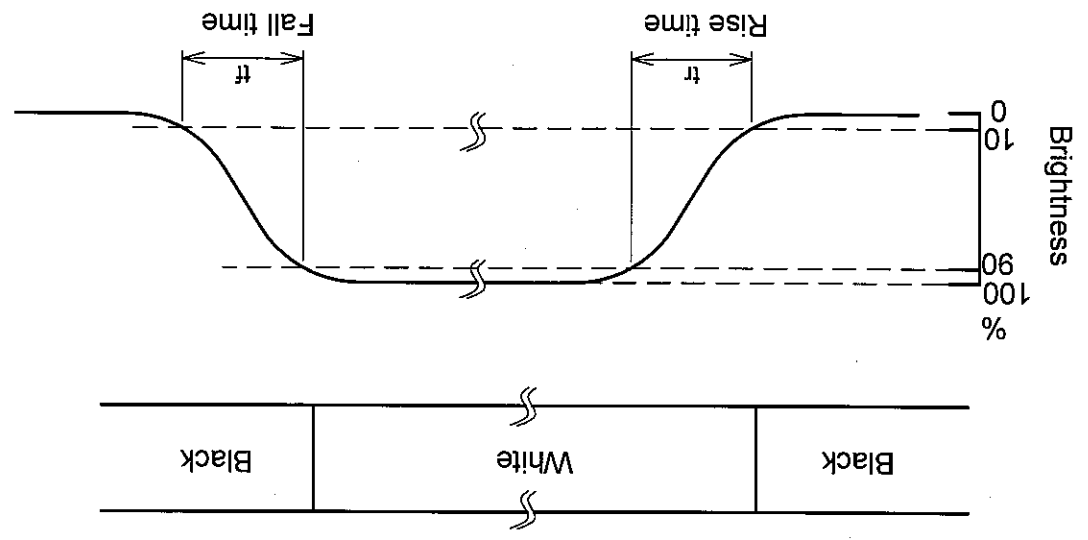


Note 8 : Definition optical response time

Note 7 : Definition of contrast "K"


$$K = \frac{\text{White Brightness}}{\text{Black Brightness}}$$

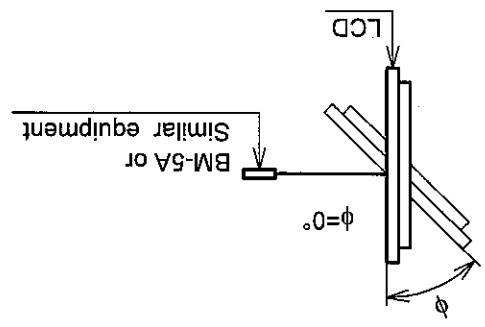

Note 6 : Definition of Viewing angle

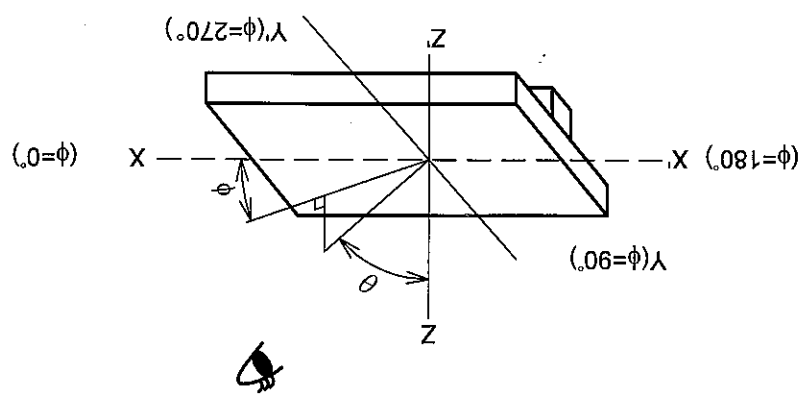


Note 5 : Definition of θ and ϕ
 (Normal)
 Viewing direction

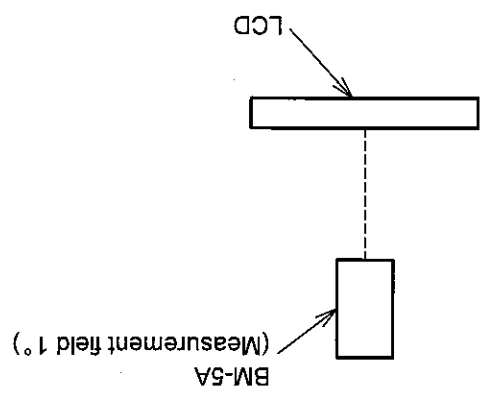

Note 4 : Measurement Condition

7. BLOCK DIAGRAM

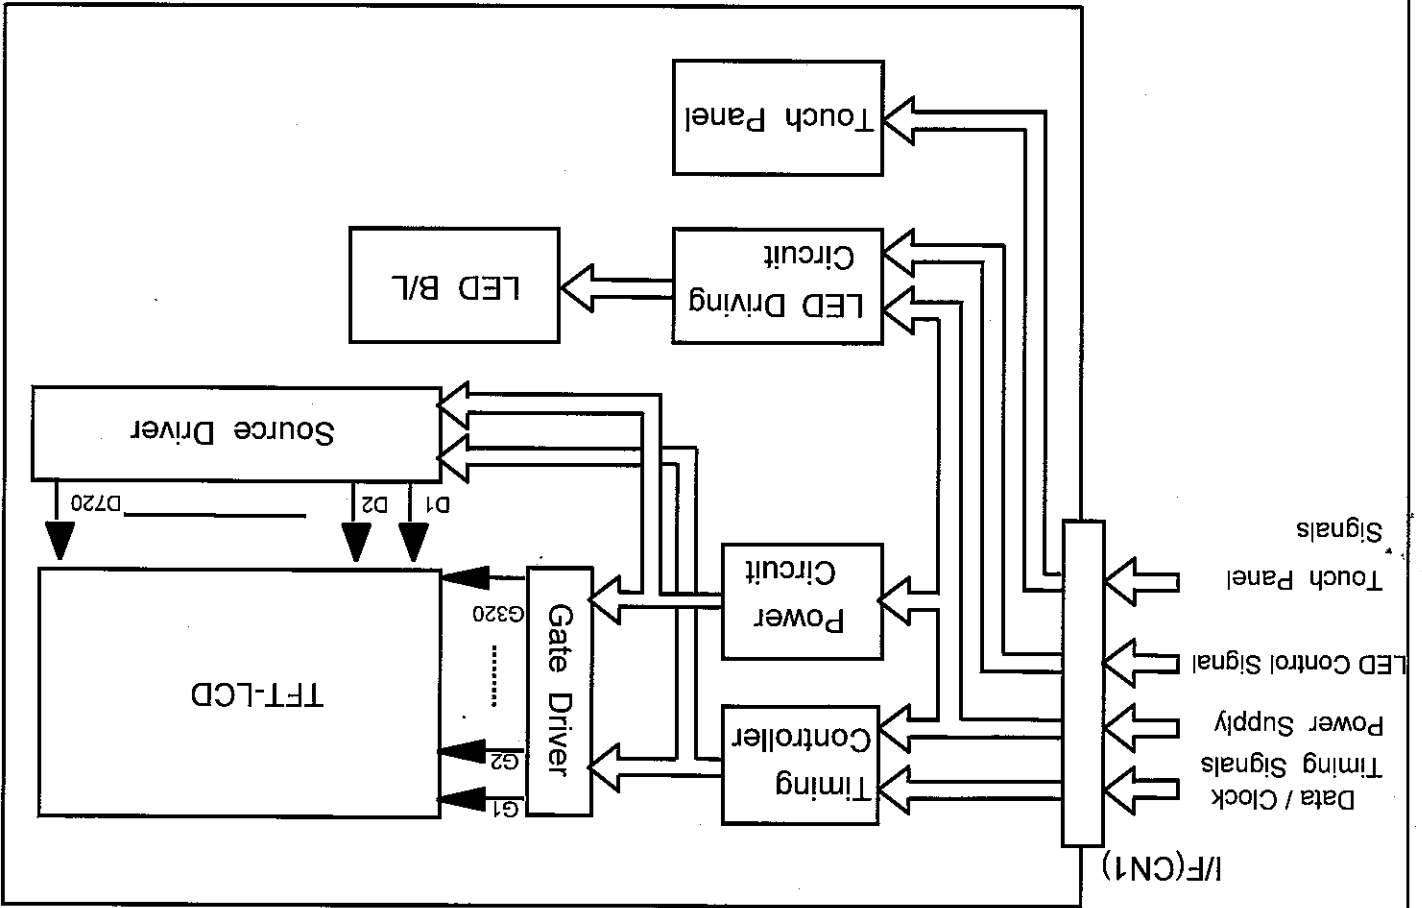

8. INTERFACE TIMING


8.1 INTERFACE TIMING

SYMBOL	UNIT	MAX.	TYP.	MIN.	
T0	Line	-	327	-	Vertical Total
T1	Line	-	1	1	Vertical Sync Width
T2	Line	-	322	-	Vertical Sync Start
T3	Line	-	323	-	Vertical Sync End
T4	Line	-	7	5	Vertical Blank Time
T5	Line	-	320	-	Vertical Display End
T6	Pixel Clock	509	273	265	Horizontal Total
T7	Pixel Clock	10	5	4	Horizontal Sync Width
T8	Pixel Clock	307	251	244	Horizontal Sync Start
T9	Pixel Clock	317	256	248	Horizontal Sync End
T10	Pixel Clock	269	33	25	Horizontal Blank Time
T11	Pixel Clock	-	240	-	Horizontal Display End

Note : Vertical Total should be set to odd.

Note1. VSYNC is generated by Tcon IC.


Fig1. Timing sequence for Graphic controller

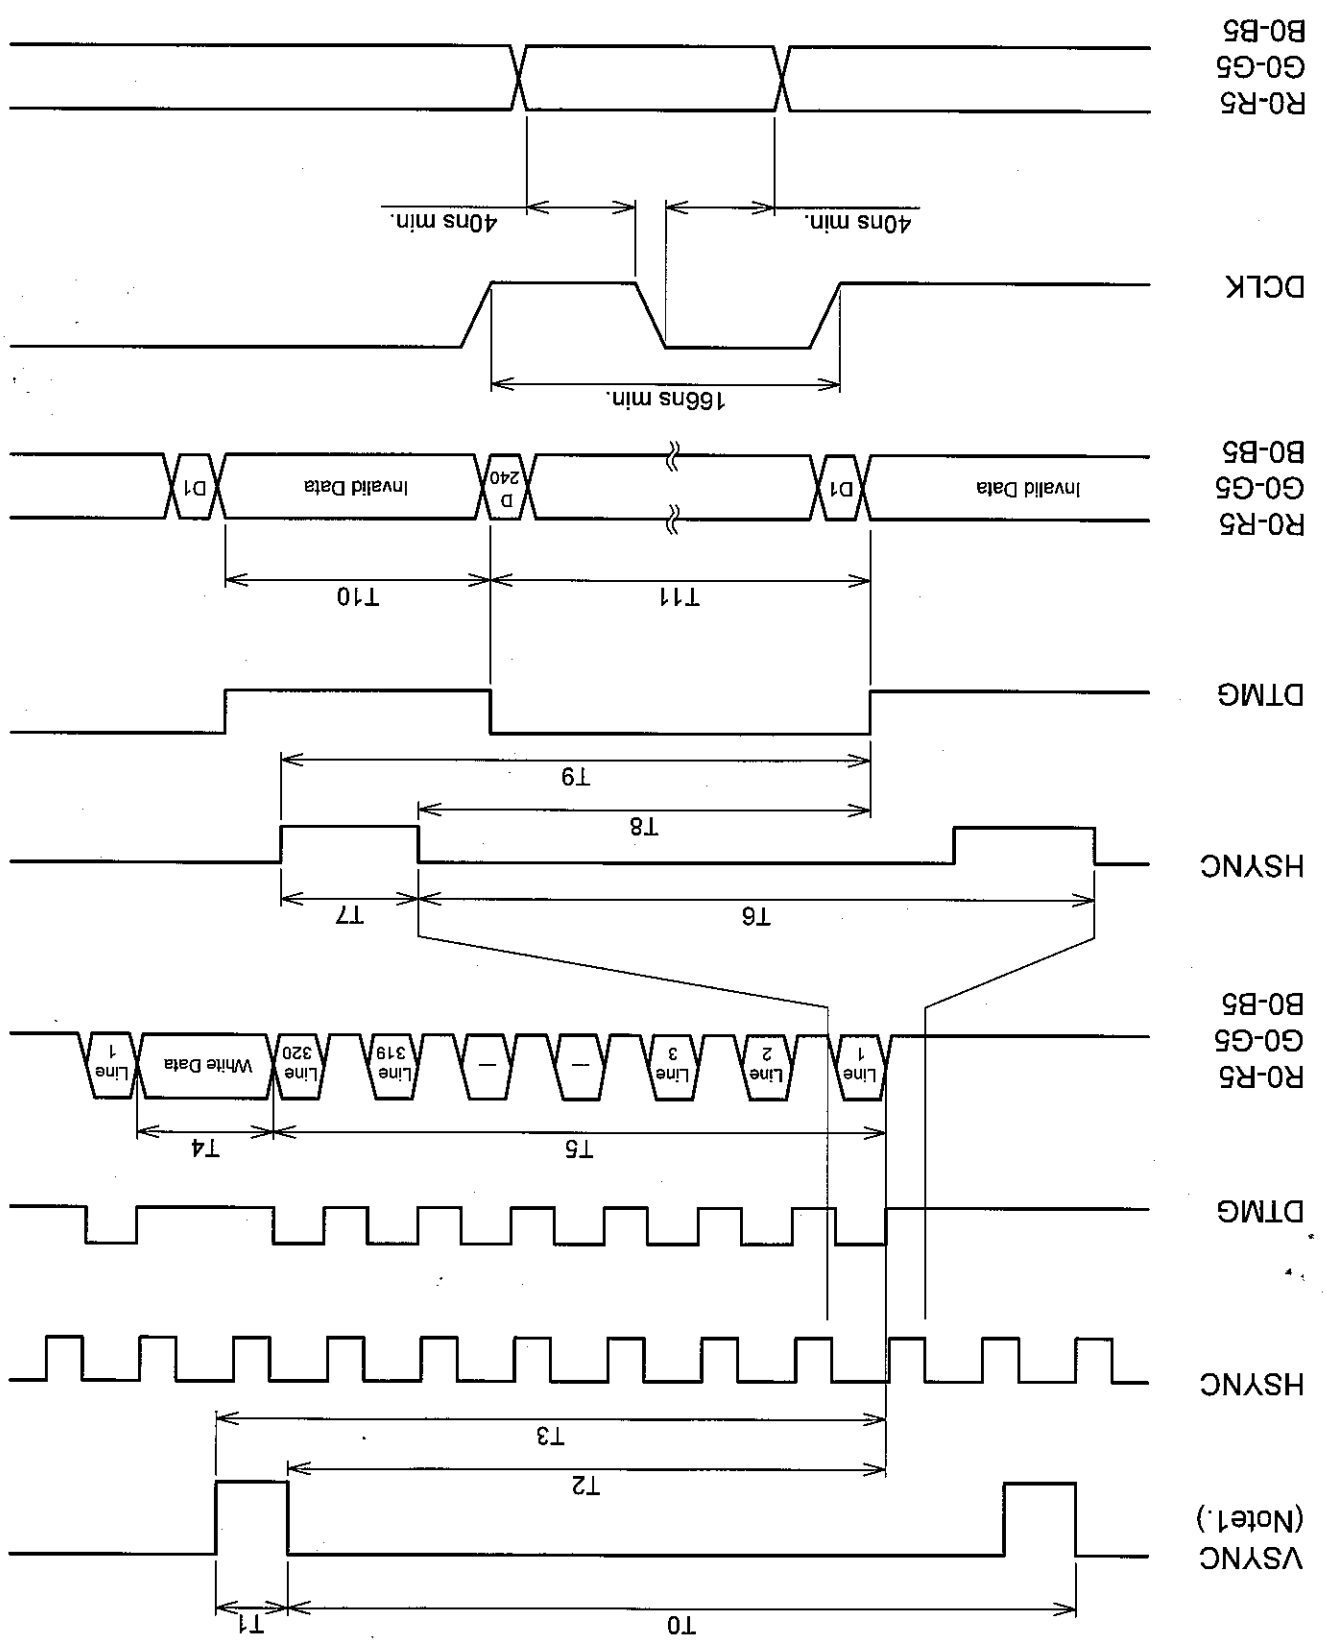

(Data is latched negative edge trigger of DCLK)



8.2 TIMING CHART

8.3 POWER ON/OFF SEQUENCE

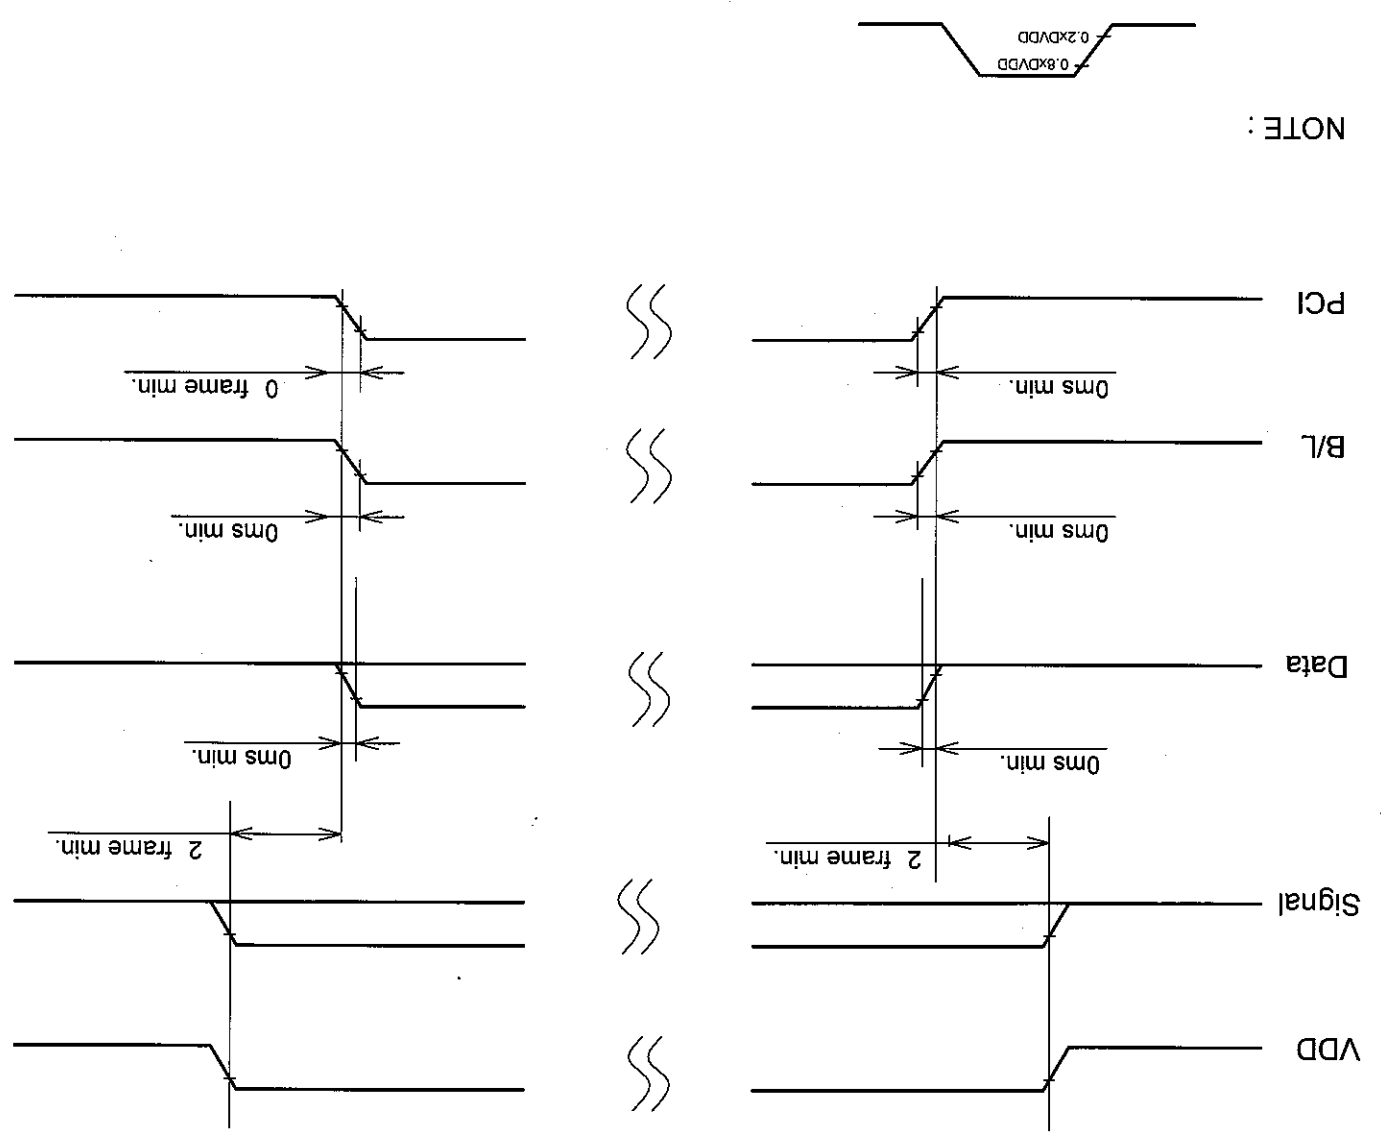

NOTE :

Top View

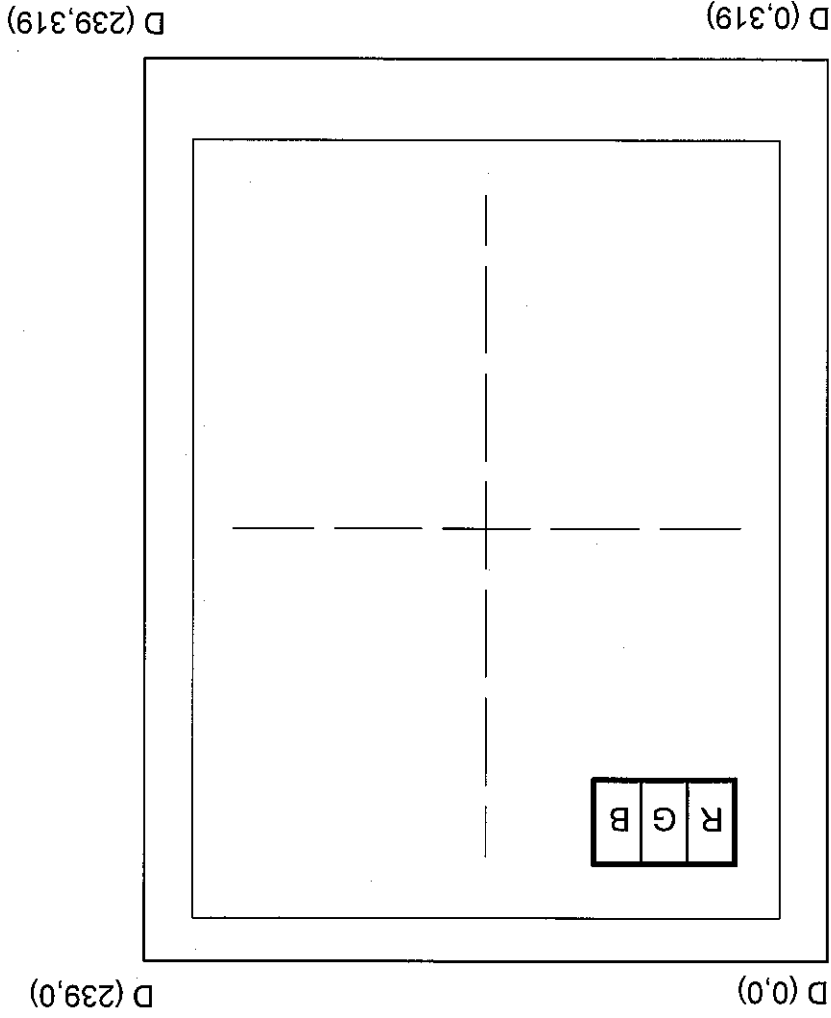

D (0,0) D (1,0)

8.4.2 Data address

8.5 INTERNAL PIN CONNECTION


CN1 AMP : 1770046-3(Suitable FPC : $\pm 0.3 \pm 0.03\text{mm}$, $0.5 \pm 0.03\text{mm}$ pitch)

PIN No.	SIGNAL	FUNCTION
1	VDD	Power Supply for Logic
2	VDD	Power Supply for Logic
3	VDD	Power Supply for Logic
4	DCLK	Dot Clock
5	VSS	GND
6	HSYNC	Horizontal Sync Pulse
7	VSS	GND
8	DTMG	Timing Signal for Data
9	VSS	GND
10	NC	No Connection
11	VSS	GND
12	R5	Red Data
13	R4	
14	R3	
15	VSS	GND
16	R2	Red Data
17	R1	
18	R0	
19	VSS	GND
20	G5	Green Data
21	G4	
22	G3	
23	VSS	GND
24	G2	Green Data
25	G1	
26	G0	
27	VSS	GND
28	B5	Blue Data
29	B4	
30	B3	
31	VSS	GND
32	B2	Blue Data
33	B1	
34	B0	
35	PCI	Power Control In (Note1)
36	Vctrl	LED Current Control
37	XR	Touch Panel Right Side
38	YL	Touch Panel Lower Side
39	XL	Touch Panel Left Side
40	YU	Touch Panel Upper Side



Note 1. Please follow the page 8-3/6 to set the PCI.

Scale : NTS
Unit : mm

Detail B


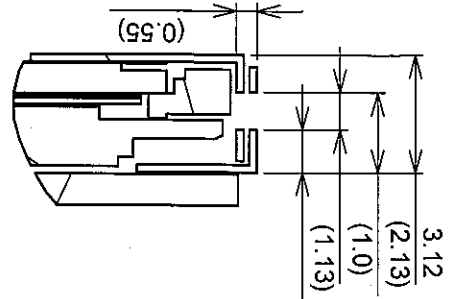


Detail A

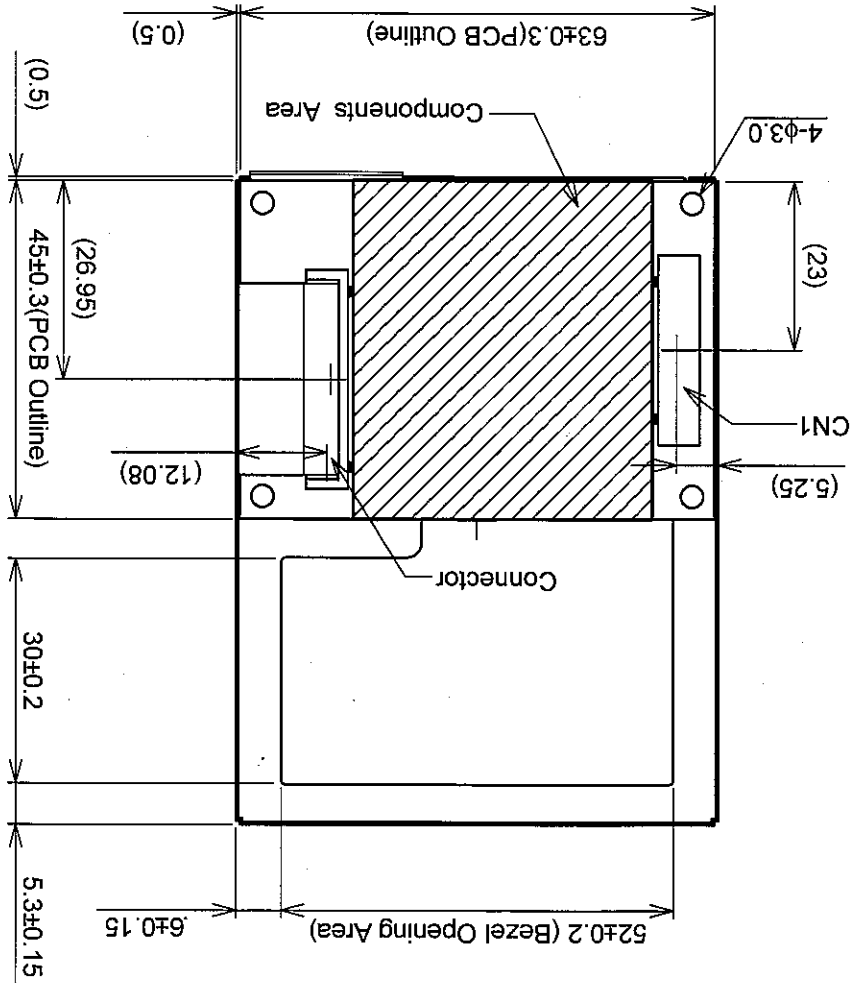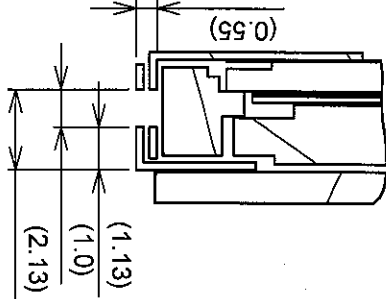

3 (Except FPC Area)

10.2 DEFINITION OF ZONE

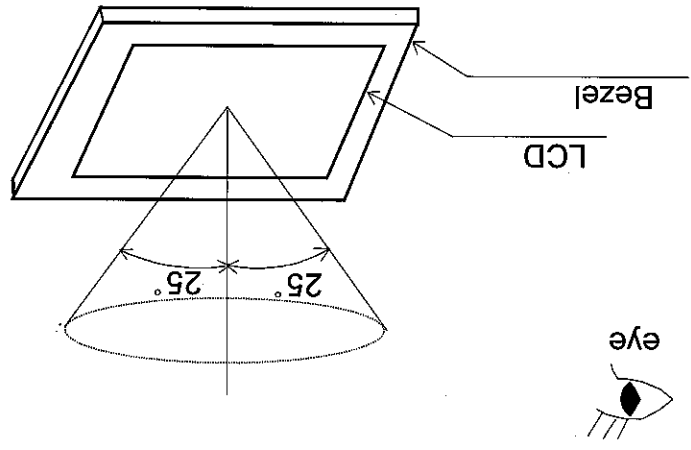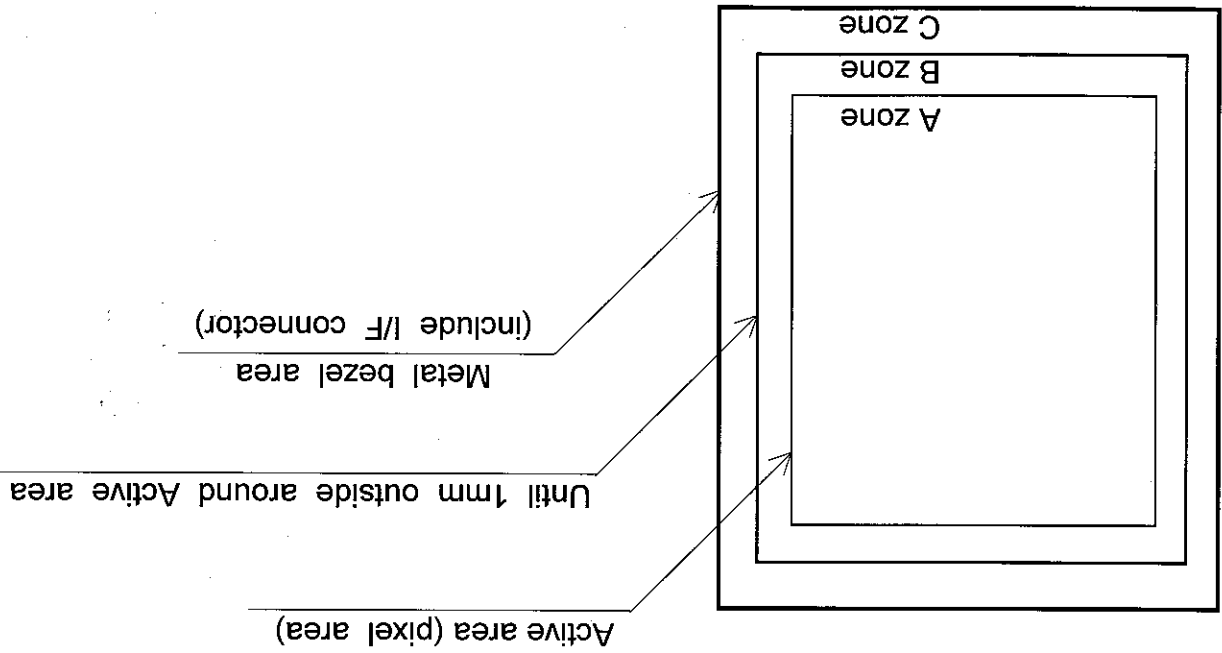

10. APPEARANCE STANDARD

10.1 APPEARANCE INSPECTION CONDITION

Visual inspection should be done under the following condition.

- (1) The inspection should be done in a dark room.(More than 1000(lx) and non-directive)
- (2) The distance between eyes of an inspector and the LCD module is 30cm.
- (3) The viewing zone is shown the figure:
Viewing angle $\leq 25^\circ$

10.3 APPEARANCE SPECIFICATION

(1)LCD Appearance

*) If the problem related to this section occurs about this item, the responsible persons of both party (Customer and HITACHI) will discuss the matter in detail.




No.	ITEM	CRITERIA	APPLIED ZONE
-----	------	----------	--------------

A,B	Scratches	Length L(mm)	Maximum number
		$L \leq 2.0$	acceptable
		$L \leq 2.0$	ignored
		$L < 2.0$	none
A	Dent	Distinguished one is acceptable (To be judged by HITACHI standard)	
		Same as above	
		Wrinkles in Polarizer	

A	Bubbles	Average diameter D(mm)	Maximum number
		$D \leq 0.3$	acceptable
		$0.3 < D$	none
A,B	Stains Foreign Materials	Length L(mm)	Maximum number
		$L < 2.0$	acceptable
		$L \leq 1.0$	4
		$0.05 < W \leq 0.1$	2

A,B	Dark spot	Round(Dot shape)		
		Average diameter D(mm)	Maximum number	acceptable
		$D \leq 0.15$	6	
		$0.15 < D \leq 0.2$	4	
		$0.2 < D$	none	
		The total number	Filamentous + Round=9	
		Those wiped out easily are acceptable		
A	Foreign Materials	Length L(mm)	Maximum number	
		$L < 2.0$	4	
A	Wrinkles in Polarizer	Same as above		
		Dent		

A, B	Dot Defect	Color Tone		To be judged by HITACHI STANDARD
		Color Uniformity		Same as above
		Sparkle mode	1 dot	4
			2 dots	2(set)
		Black mode	1 dot	4
			2 dots	2(set)
		Sparkle mode & Black mode	2 dots	4
			Total	6
		Maximum number		acceptable
		Maximum number		acceptable

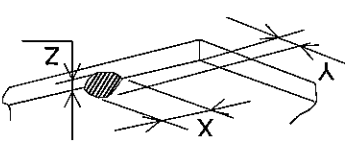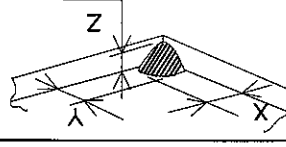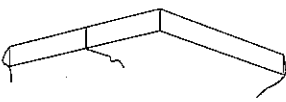
ITEM	SPECIFICATIONS						
Common Indentation	 <table border="1"> <tr> <td>X</td> <td>Y</td> <td>Z</td> </tr> <tr> <td>≤5.0</td> <td>≤3.0</td> <td>≤t</td> </tr> </table>	X	Y	Z	≤5.0	≤3.0	≤t
X	Y	Z					
≤5.0	≤3.0	≤t					
Corner Broken	 <table border="1"> <tr> <td>X</td> <td>Y</td> <td>Z</td> </tr> <tr> <td>≤3.0</td> <td>≤3.0</td> <td>≤t</td> </tr> </table>	X	Y	Z	≤3.0	≤3.0	≤t
X	Y	Z					
≤3.0	≤3.0	≤t					
Proceeding Crack	 <p>None</p>						

(3) Glass indentation


No.	ITEM	CRITERIA			APPLIED ZONE	
		Length L(mm)	Width W(mm)	Maximum number		
TOUCH PANEL	Scratches	-	Width W(mm)	Maximum number	A,B	
		10<L	0.05≤W<0.1	none		
		-	W<0.05	ignored		
		-	0.1≤W	none		
	Foreign Materials	Dark Spot	Length L(mm)	Width W(mm)	Maximum number	A,B
			-	W<0.05	ignored	
			L>3	0.05≤W≤0.1	none	
		Newton Ring (Touch Panel)	Average diameter D(mm)	Round(Dot shape)	Maximum number	A,B
				D≤0.25	acceptable	
				0.25<D≤0.35	6	
Touch Panel Uncleaness	Rubbing Scratch	To be judged by HITACHI standard			A	
		No conspicuous dirt				
		To be judged by HITACHI standard				

(2) Touch panel appearance
 Visual inspection should be done under the following condition.
 *) The inspection should be done in a dark room. (more than 500 lx and non-directive)
 *) The distance between eyes of an inspector and the LCD module is 30 cm.
 *) The viewing angle ≤60°.

Note 1 : Definition of average diameter (D)

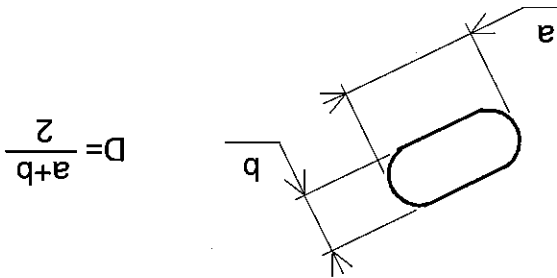

Note 2 : Definition of length (L) and width (W)

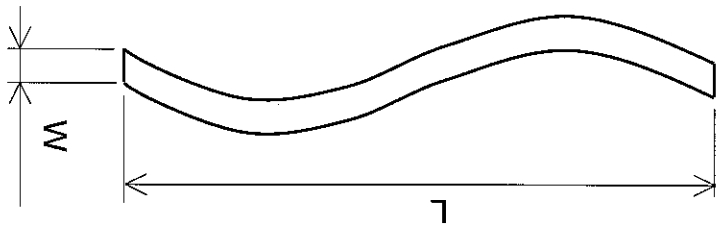

Note 3 : Definition of dot defect

(a) Dot Defect : Defect Area > 1/2 dot


(b) Sparkle mode : Brightness of dot is more than 30% at Black raster.

(c) Black mode : Brightness of dot is less than 70% at R.G.B raster.

(d) 1 dot : Defect dot is isolated , not attached to other defect dot.

(e) N dot : N defect dots are consecutive .

(N means the number of defect dots.)



2 dots defect included defect dot "X" is defined as follows.
 Adjacent dots to defect dot "X":




(f) Counting definition of adjacent dots(1 sets) : same as 1 dot defect.
 (g) Those wiped out easily are acceptable

11. PRECAUTION IN DESIGN

11.1 MOUNTING PRECAUTION

(1) When assembling the Touch Panel and you case, please refer to the figure below.

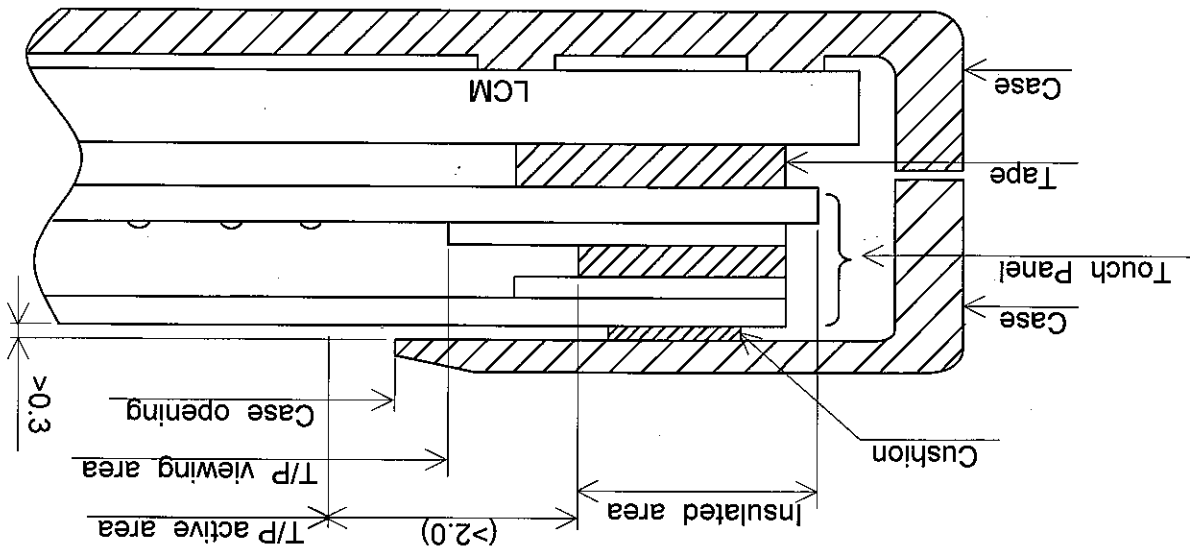

(2) The clearance between the Touch Panel and case shall be designed so that the case edge never presses the input screen when it is deformed by heat or other causes.

(3) The case shall be designed not to touch the tail portion (FPC for Touch Panel).

(4) The boundary space between the effective area and the insulated area is unstable.

Touching this area may effect the operation of the Touch Panel.

The case must be designed so that it does not touch the boundary space.

11.2 PRECAUTIONS AGAINST ELECTROSTATIC DISCHARGE

As this module contains C-MOS LSIs, it is not strong against electrostatic discharge.

Make certain that the operator's body is connected to the ground through a list band, etc. And don't touch I/F pins directly.

11.3 HANDLING PRECAUTIONS

(1) Since the Touch Panel on the top, and the frame on the bottom tend to be easily damaged, they should be with full care so as not to get them touched, pushed or rubbed by a piece on glass, tweezers and anything else which are harder a pencil lead 3H.

(2) As the adhesives used for adhering upper/lower polarizers and frame are made of organic substances which will be deteriorated by a chemical reaction with such chemicals as acetone, toluene, ethanol and isopropyl alcohol. The following are recommended for use :
normal hexane

Please contact with us when it is necessary for you to use chemicals other than the above.

(3) Lightly wipe to clean the dirty surface with absorbent cotton or other soft material like chamois, soaked in the recommended chemicals without scrubbing it hardly.
Always wipe the surface horizontally or vertically. Never give a wipe in a circle. To prevent the display surface from damage and keep the appearance in good state, it is sufficient, in general, to wipe it with absorbent cotton.

(4) Immediately wipe off saliva or water drop attached on the display area because it may cause deformation or faded color.

(5) Foggy dew deposited on the surface may cause a damage, stain or dirt to the polarizer.
When you need to take out the LCD module from some place at low temperature for test, etc.
It is required to be warmed them up to temperature higher than room temperature before taking them out.

(6) Touching the display area or I/F pins with bare hands or contaminating them are prohibited, because the stain on the display area and poor insulation between terminals are often caused by being touched with bare hands.
(Some cosmetics are detrimental to polarizer's.)

(7) In general, the glass is fragile so that, especially on its periphery, tends to be cracked or chipped in handling. Please not give the LCD module sharp shocks by falling, etc.

(8) Maximum pressure to the surface must be less than 1.96×10^4 Pa.
And if the pressure area is less than 1 cm^2 , maximum pressure must be less than 1.96N.

(9) Since the metal width is narrow on these locations (see page 9-1/1), please careful with handling.

(10) Top sheets shall be cleaned gently using a soft cloth such as those used for glasses.
Hard wiping accumulated dust will leave scars on the surface even using a cloth.

11.4 OPERATION PRECAUTION

(1) Using a LCM module beyond its maximum ratings may result in its permanent destruction.
LCM module's should usually be used under recommended operating conditions shown in chapter 5. Exceeding any of these conditions may adversely affect its reliability.

11.6 SAFETY



Wear finger cots or gloves whenever handling or assembling a Touch Panel its glass edges are sharp.

- (1) Store the LCD modules in a dark place; do not expose them to sunlight or ultraviolet rays.
- (2) Keep the temperature between -20°C and 70°C at normal humidity.
- (3) Store the LCD modules in the container which is used for shipping from us.
- (4) No articles shall be left on the surface over an extended period of time.

11.5 STORAGE

In case of storing LCD module for a long period of time (for instance, for years) for the purpose of replacement use, the following precautions necessary.

- (1) Store the LCD modules in a dark place; do not expose them to sunlight or ultraviolet rays.
 - (2) Keep the temperature between -20°C and 70°C at normal humidity.
 - (3) Store the LCD modules in the container which is used for shipping from us.
 - (4) No articles shall be left on the surface over an extended period of time.
- other input device.
- (5) Resistance range: Your controller shall be set up to allow the resistance range of Touch Panel specified in our CAS.
 - (6) Pointed position of Touch Panel may shift owing to a change in resistance of Touch Panel depending on the operation condition. To compensate this shift, the set shall be given a calibration function.
 - (7) Input shall be made with a stylus pen (polyacetal, R0.8). Chances are very high that use of a metal piece including a ball point pen or sharp edge will impair accuracy.
 - (8) The Touch Panel is an auxiliary input device. The system shall be designed to have other input device.
- (2) Response time will be extremely delayed at lower temperature than the specified operating temperature range and on the other hand LCD's shows dark blue at higher temperature.
 - However those phenomena do not main defects of the LCD module. Those phenomena will disappear in the specified operating temperature range.
 - (3) If the display area is pushed hard during operation, some display patterns will be abnormally display.
 - (4) A slight dew depositing on terminals may cause electrochemical reaction which leads to terminal open circuit. Please operate the LCD module under the relative condition of 40°C 85%RH.
 - (5) Resistance range: Your controller shall be set up to allow the resistance range of Touch Panel specified in our CAS.
 - (6) Pointed position of Touch Panel may shift owing to a change in resistance of Touch Panel depending on the operation condition. To compensate this shift, the set shall be given a calibration function.
 - (7) Input shall be made with a stylus pen (polyacetal, R0.8). Chances are very high that use of a metal piece including a ball point pen or sharp edge will impair accuracy.
 - (8) The Touch Panel is an auxiliary input device. The system shall be designed to have other input device.

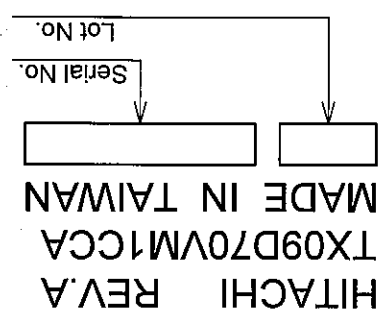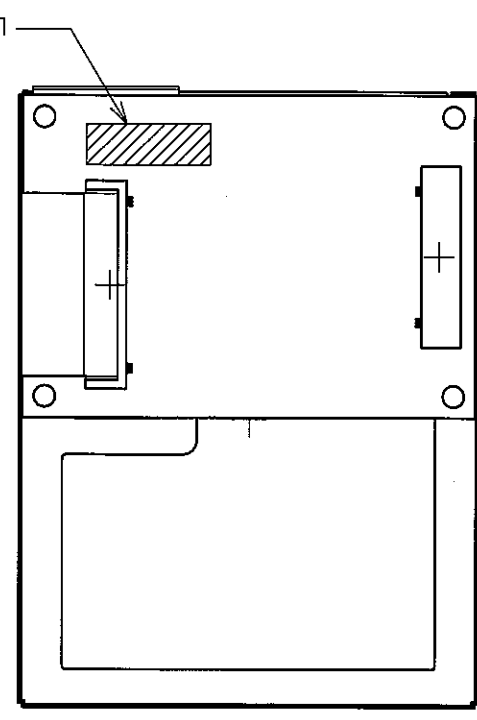


12.2 Location of Label : On the PCB

Year	Mark
2006	6
2007	7
2008	8
2009	9
2010	0

Month	Jan.	Feb.	Mar.	Apr.	May	Jun.
Mark	01	02	03	04	05	06
Month	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
Mark	07	08	09	10	11	12


Week (Day In Calendar)	Figure In Lot Mark
01~07	1
08~14	2
15~21	3
22~28	4
29~31	5

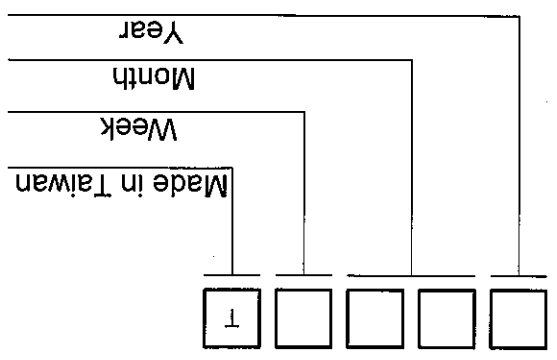

Lot mark is consisted of 4 digits for production lot and 5 digits for production control.

12.1 LOT MARK

12. DESIGNATION OF LOT MARK

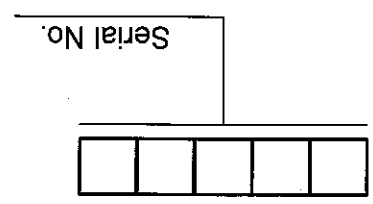

13. PRECAUTION FOR USE

- (1) A limit sample should be provided by the both parties on an occasion when the both parties agree to its necessity.
Judgement by a limit sample shall take effect after the limit sample has been established and confirmed by the both parties.
- (2) On the following occasions, the handling of the problem should be decided through discussion and agreement between responsible persons of the both parties.
- 1) When a question is arisen in the specifications.
 - 2) When a new problem is arisen which is not specified in this specifications.
 - 3) When an inspection specifications change or operating condition change by customer is reported to HITACHI, and some problem is arisen in the specification due to the change.
 - 4) When a new problem is arisen at the customer's operating set for sample evaluation.

- (3) Regarding the treatment for maintenance and repairing, both parties will discuss it in six months later after latest delivery of this product.
- The precaution that should be observed when handling LCM have been explained above.
- If any points are unclear or if you have any requests, please contact with HITACHI.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [hitachi](#) manufacturer:

Other Similar products are found below :

[HM6264LP-70](#) [433750H](#) [005170E](#) [879265E](#) [008726E](#) [001619B](#) [901015X](#) [2SA715](#)