

General Description

Ultra-FRD module devices are optimized to reduce losses and EMI/RFI in high frequency power conditioning electrical systems.

These diode modules are ideally suited for power converters, motors drives and other applications where switching losses are significant portion of the total losses.

Features

- Repetitive Reverse Voltage : $V_{RRM} = 600V$
- Low Forward Voltage : $V_F(\text{typ.}) = 1.45V$
- Average Forward Current : $I_F(\text{Av.}) = 150A @ T_C = 100^\circ C$
- Ultra-Fast Reverse Recovery Time : $t_{rr}(\text{typ.}) = 40ns$
- Extensive Characterization of Recovery Parameters
- Reduced EMI and RFI
- Isolation Type Package


Applications

- High Speed & High Power converters, Welders
- Various Switching and Telecommunication Power Supply



E301932

5DM-1



Center Common

Absolute Maximum Ratings @ $T_C = 25^\circ C$ (Per Leg)

Characteristics	Conditions	Symbol	Rating	Unit	
Repetitive Peak Reverse Voltage		V_{RRM}	600	V	
Reverse DC Voltage		$V_{R(DC)}$	480	V	
Average Forward Current	Resistive Load	$I_{F(AV)}$	$T_C = 25^\circ C$	300	A
			$T_C = 100^\circ C$	150	A
Surge(non-repetitive) Forward Current	One Half Cycle at 60Hz, Peak Value	I_{FSM}	2750	A	
I^2t for Fusing	Value for One Cycle Current, $t_w = 8.3ms, T_J = 25^\circ C$ Start	I^2t	31.3×10^3	A^2s	
Junction Temperature		T_J	-40 ~ 150	$^\circ C$	
Maximum Power Dissipation		P_D	460	W	
Isolation Voltage	@AC 1 minutes	V_{isol}	2500	V	
Storage Temperature		T_{stg}	-40 ~ 125	$^\circ C$	
Mounting Torque(M6)		-	4.0	N.m	
Terminal Torque(M5)	Typical Including Screws	-	2.0	N.m	
Weight		-	120	g	

Electrical Characteristics @T_c = 25°C(unless otherwise specified)

Characteristics	Conditions	Symbol	Min.	Typ.	Max.	Unit	
Cathode Anode Breakdown Voltage	I _R =100uA	V _R	600	-	-	V	
Diode Maximum Forward Voltage	I _F =150A	V _{FM}	T _C =25°C	-	1.45	1.8	V
			T _C =100°C	-	1.35	-	
Diode Peak Reverse Recovery Current	T _C =100°C, V _{RRM} applied	I _{RRM}	-	-	1.0	mA	
Diode Reverse Recovery Time	I _F =1A, V _R =30V di/dt = -300A/uS	t _{rr}	-	40	55	ns	
Diode Reverse Recovery Time	I _F =150A, V _R =300V di/dt = -300A/uS	t _{rr}	T _C =25°C	-	110	140	ns
			T _C =100°C	-	180	-	

Thermal Characteristics

Characteristics	Conditions	Symbol	Min.	Typ.	Max.	Unit
Thermal Resistance(Isolation Type)	Junction to Case	R _{th(j-c)}	-	-	0.27	°C/W

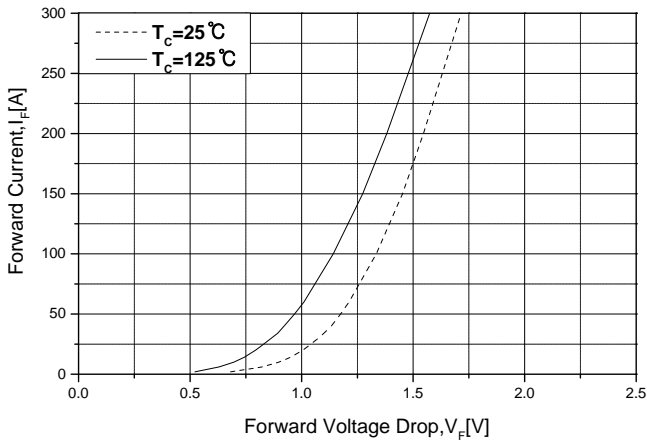


Fig.1 Typical Forward Voltage Drop vs. Instantaneous Forward Current

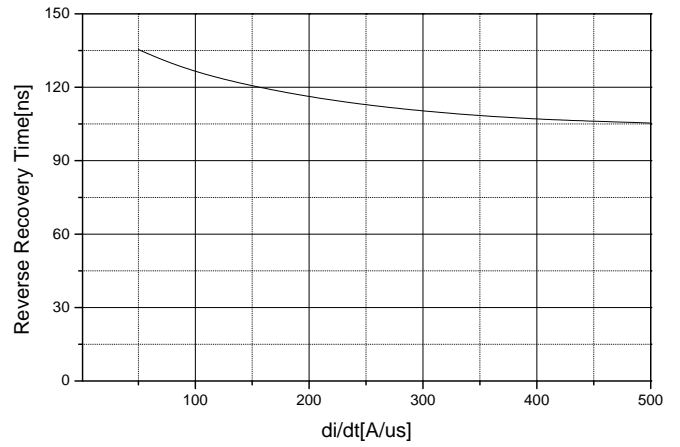


Fig.2 Typical Reverse Recovery Time Vs. $-di/dt$

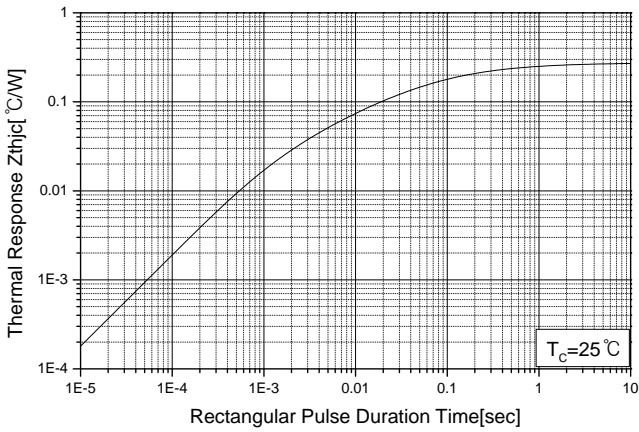


Fig.3 Transient Thermal Impedance (Z_{thjc}) Characteristics



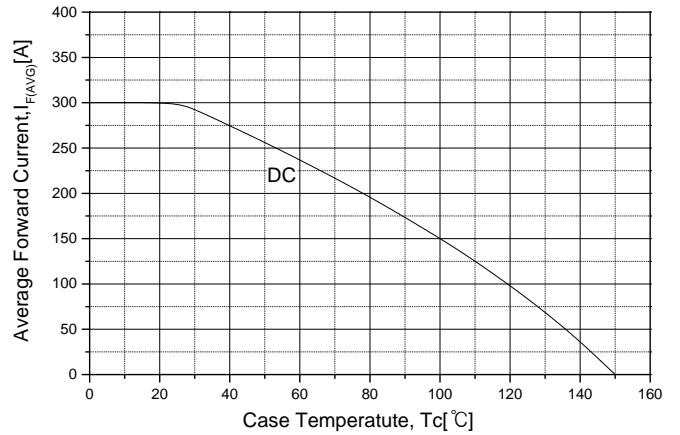


Fig.4 Forward Current Derating Curve

Package Dimension

5DM-1

Dimensions are in millimeters, unless otherwise specified

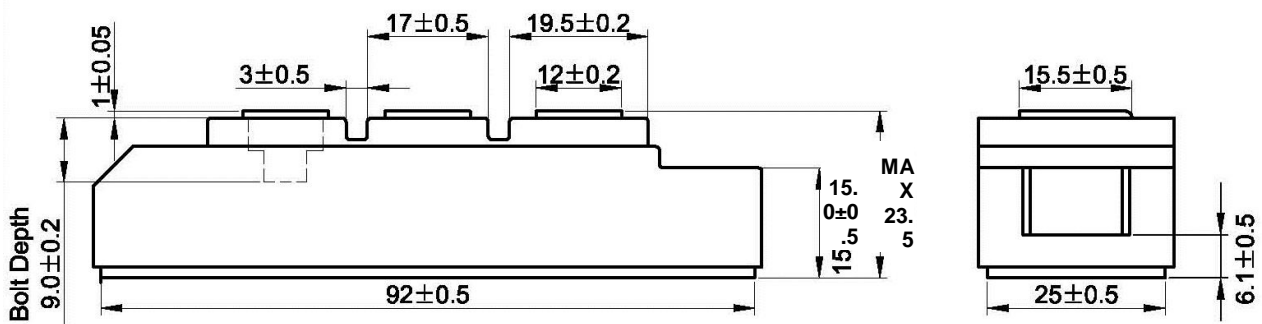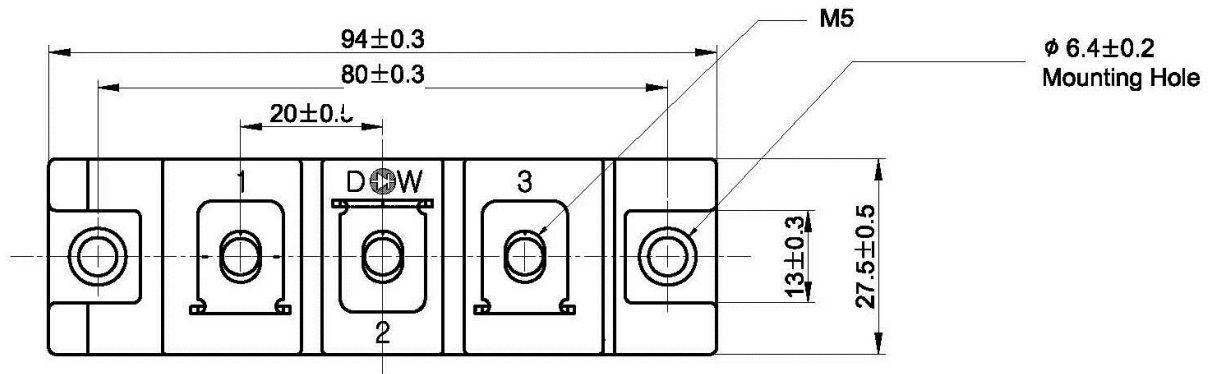

DISCLAIMER:

The Products are not designed for use in hostile environments, including, without limitation, aircraft, nuclear power generation, medical appliances, and devices or systems in which malfunction of any Product can reasonably be expected to result in a personal injury. Seller's customers using or selling Seller's products for use in such applications do so at their own risk and agree to fully defend and indemnify Seller.

MagnaChip reserves the right to change the specifications and circuitry without notice at any time. MagnaChip does not consider responsibility for use of any circuitry other than circuitry entirely included in a MagnaChip product. [MagnaChip](#) is a registered trademark of MagnaChip Semiconductor Ltd.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [Magnachip](#) manufacturer:

Other Similar products are found below :

[CUS06\(TE85L,Q,M\)](#) [MA4E2039](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR30H100MFST1G](#) [MMBD301M3T5G](#) [PMAD1103-LF](#) [PMAD1108-LF](#) [RB160M-50TR](#) [RB520S-30](#) [RB551V-30](#) [DD350N18K](#) [DZ435N40K](#) [DZ600N16K](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SBS818-TL-E](#) [SK32A-LTP](#) [SK33A-TP](#) [SK34A-TP](#) [SK34B-TP](#) [SMD1200PL-TP](#) [ACDBN160-HF](#) [SS3003CH-TL-E](#) [STPS30S45CW](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM\)](#) [MBR1240MFST1G](#) [MBRB30H30CT-1G](#) [BAS28E6433HTMA1](#) [BAS 70-02L E6327](#) [HSB123JTR-E](#) [JANTX1N5712-1](#) [VS-STPS40L45CW-N3](#) [DD350N12K](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK110-LTP](#)