


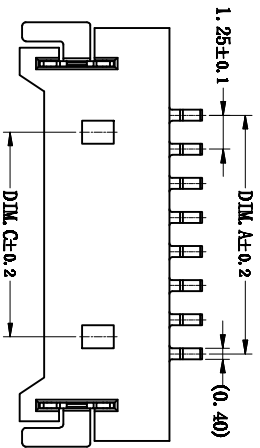


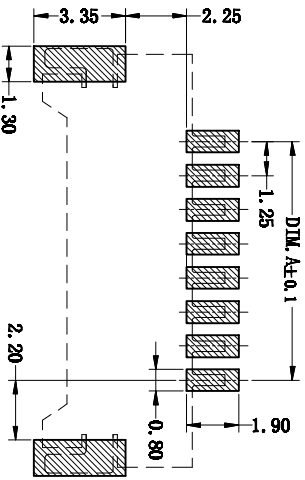




注：本板为禁止运输、复制、翻印文件，以及用其内容进行交流



Circuit	Dimensions (mm)		
	A	B	C
02	1.25	7.65	-
03	2.50	8.90	-
04	3.75	10.15	2.50
05	5.00	11.40	3.75
06	6.25	12.65	5.00
07	7.50	13.90	6.25
08	8.75	15.15	7.50
09	10.00	16.40	8.75
10	11.25	17.65	10.00
11	12.50	18.90	11.25
12	13.75	20.15	12.50
...
20	23.75	30.15	22.50

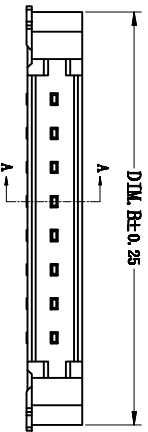

How to order

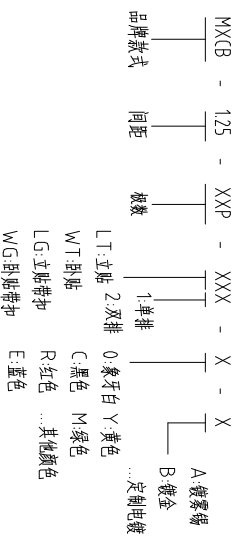

- 技术要求:
- 1、塑件材料: LCP (UL-94V-0)
 - 2、接触件: 磷铜镀金
 - 3、绝缘电阻: $\leq 20m\Omega$
 - 4、绝缘电阻: $\geq 100M\Omega$
 - 5、额定电压: 125V AC DC
 - 6、额定电流: 1.0A AC DC
 - 7、耐压: 能承受500V AC/Min ute
 - 8、工作温度: $-25^{\circ}\sim+85^{\circ}$
 - 9、可靠性试验: 浸锡面积 $\geq 95\%$ 温度 280°C , 时间 $2.5\pm 0.5\text{s}$
 - 10、铅和锡等六大有害物质含量符合环保要求

SUGGESTED PCB LAYOUT (COMPONENT SIDE)

GENERAL TOLERANCES

0.X	± 0.25	X. $^{\circ}$	$\pm 3^{\circ}$
0.XX	± 0.12		
0.XXX	± 0.05	X.X $^{\circ}$	$\pm 0.5^{\circ}$

序号	名称	材料	数量	备注
3	附件 Fixing Ball	附件 Fixing Balls	3	电路板: 零件按图面标注尺寸, 材料按图面标注.
2	端子 Contact	附件 Fixing Balls	204	
1	盖板 Cover	LCP (UL-94V-0)	1	本板

ITEM	NAME OF PART	NO. OF PART	Q-TY	MATERIAL	NOTE
DWG	CHK	DATE	UNITS	SHEET/OF	1/1
	DATE		SCALE	A4	
APP	DATE		NAME		
			MXCB-125-XXP-WT1		

MAXXU 慈溪市迈旭电子有限公司

CIXI MAXXU ELECTRONICS CO.,LTD

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [MAX](#) manufacturer:

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#)
[M90C108951C](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-](#)
[3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#)
[803-43-024-10-001000](#)