

# MAX98300

## Mono 2.6W Class D Amplifier

### General Description

The MAX98300 mono 2.6W Class D amplifier provides Class AB audio performance with Class D efficiency. This device offers five selectable gain settings (0dB, 3dB, 6dB, 9dB, and 12dB) set by a single gain-select input (GAIN).

Active emissions-limiting edge-rate and overshoot control circuitry greatly reduces EMI. A patented filterless spread-spectrum modulation scheme eliminates the need for output filtering found in traditional Class D devices. These features reduce application component count.

The MAX98300 industry-leading 0.78mA at 3.7V (1.1mA at 5V) quiescent current extends battery life in portable applications.

The MAX98300 is available in an 8-pin TDFN-EP (2mm x 2mm x 0.8mm) and a 9-bump (1.2mm x 1.2mm) WLP. Both packages are specified over the extended -40°C to +85°C temperature range.

### Applications

Notebook and Netbook Computers  
 Cellular Phones  
 MP3 Players  
 Portable Audio Players  
 VoIP Phones

### Features


- ◆ **Industry-Leading Quiescent Current: 0.78mA at 3.7V, 1.1mA at 5V**
- ◆ **Spread Spectrum and Active Emissions Limiting**
- ◆ **Five Selectable Gains**
- ◆ **Click-and-Pop Suppression**
- ◆ **Thermal and Overcurrent Protection**
- ◆ **Low-Current Shutdown Mode**
- ◆ **Space-Saving Packages**
  - 2mm x 2mm x 0.8mm, 8-Pin TDFN-EP
  - 1.2mm x 1.2mm, 9-Bump WLP (0.4mm Pitch)

### Ordering Information

| PART         | TEMP RANGE     | PIN-PACKAGE |
|--------------|----------------|-------------|
| MAX98300ETA+ | -40°C to +85°C | 8 TDFN-EP*  |
| MAX98300EWL+ | -40°C to +85°C | 9 WLP       |

+ Denotes a lead(Pb)-free/RoHS-compliant package.  
 \*EP = Exposed pad.

### Typical Application Circuit

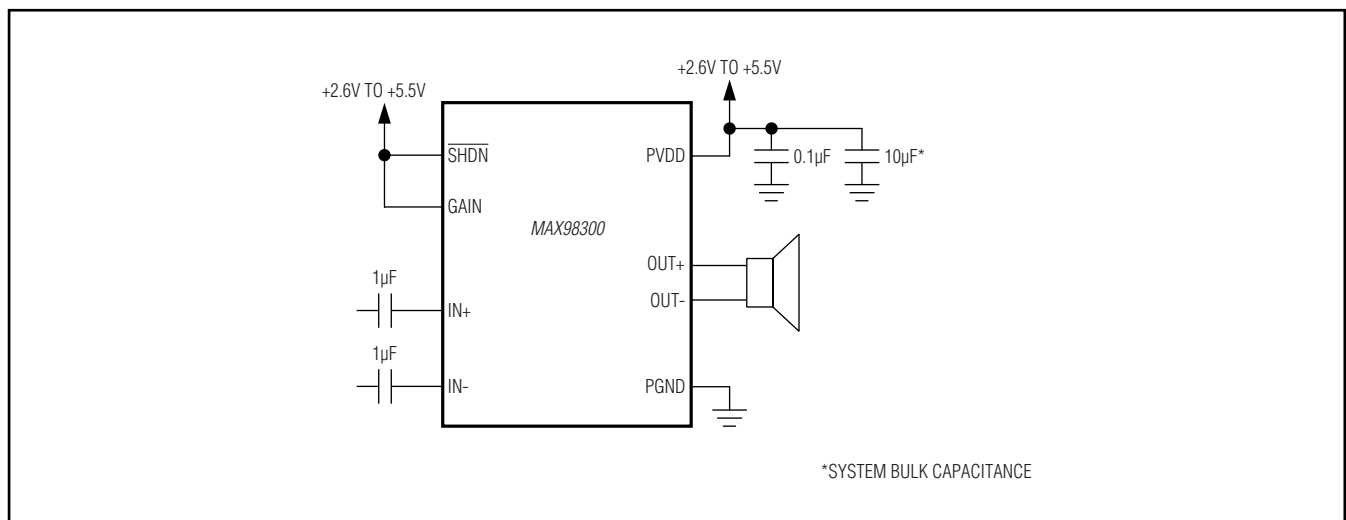

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim's website at [www.maximintegrated.com](http://www.maximintegrated.com).

# MAX98300

## Mono 2.6W Class D Amplifier

### ABSOLUTE MAXIMUM RATINGS

PVDD, IN+, IN-,  $\overline{\text{SHDN}}$ , GAIN to PGND..... -0.3V to 6V  
 All Other Pins to PGND .....-0.3V to (VPVDD + 0.3V)  
 Continuous Current Into/Out of PVDD, PGND, OUT\_...  $\pm 600\text{mA}$   
 Continuous Input Current (all other pins).....  $\pm 20\text{mA}$   
 Duration of Short Circuit Between  
   OUT\_ and PVDD, PGND ..... Continuous  
   OUT+ and OUT- ..... Continuous

Continuous Power Dissipation ( $T_A = +70^\circ\text{C}$ ) for Multilayer Board  
   TDFN-EP (derate  $11.9\text{mW}/^\circ\text{C}$ ).....953.5mW  
   WLP (derate  $12\text{mW}/^\circ\text{C}$ ) .....963.8mW  
 Junction Temperature .....+150°C  
 Operating Temperature Range.....-40°C to +85°C  
 Storage Temperature Range.....-65°C to +150°C  
 Lead Temperature (soldering, 10s) .....+300°C  
 Soldering Temperature (reflow) .....+260°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### ELECTRICAL CHARACTERISTICS

(VPVDD = V $\overline{\text{SHDN}}$  = 5.0V, VPGND = 0V, AV = 12dB (GAIN = PVDD), RL =  $\infty$ , RL connected between OUT+ to OUT-, AC measurement bandwidth 20Hz to 22kHz, TA = TMIN to TMAX, unless otherwise noted. Typical values are at TA = +25°C.) (Notes 1, 2)

| PARAMETER                        | SYMBOL | CONDITIONS  | MIN             | TYP     | MAX     | UNITS         |
|----------------------------------|--------|---|-----------------|---------|---------|---------------|
| <b>AMPLIFIER CHARACTERISTICS</b> |        |   |                 |         |         |               |
| Speaker Supply Voltage Range     | PVDD   | Inferred from PSRR test   | 2.6             |         | 5.5     | V             |
| Quiescent Supply Current         | IDD    | VPVDD = 5.0V  |                 | 1.1     | 2.0     | mA            |
|                                  |        | VPVDD = 3.7V  |                 | 0.78    |         |               |
| Shutdown Supply Current          | ISHDN  | V $\overline{\text{SHDN}}$ = 0V, TA = +25°C                                   |                 | < 0.1   | 10      | $\mu\text{A}$ |
| Turn-On Time                     | tON    |   |                 | 3.7     | 10      | ms            |
| Bias Voltage                     | VBIAS  |   |                 | 1.3     |         | V             |
| Maximum AC Input Voltage Swing   | VIN    | Differential  |                 | 2.0     |         | VRMS          |
|                                  |        | Single ended  |                 | 1.0     |         |               |
| Input Resistance                 | RIN    | TA = +25°C  | AV = 12dB       | 10      | 20      | k $\Omega$    |
|                                  |        |   | AV = 9dB        | 10      | 20      |               |
|                                  |        |   | AV = 6dB        | 10      | 20      |               |
|                                  |        |   | AV = 3dB        | 15      | 28      |               |
|                                  |        |   | AV = 0dB        | 26      | 40      |               |
| Voltage Gain                     | AV     | Connect GAIN to PVDD  | 11.5            | 12      | 12.5    | dB            |
|                                  |        | Connect GAIN to PVDD through 100k $\Omega$ $\pm 5\%$                          | 8.5             | 9       | 9.5     |               |
|                                  |        | GAIN unconnected  | 5.5             | 6       | 6.5     |               |
|                                  |        | Connect GAIN to PGND through 100k $\Omega$ $\pm 5\%$                          | 2.5             | 3       | 3.5     |               |
|                                  |        | Connect GAIN to PGND  | -0.5            | 0       | +0.5    |               |
| Output Offset Voltage            | VOS    | TA = +25°C (Note 3)   |                 | $\pm 1$ | $\pm 3$ | mV            |
| Click and Pop                    | KCP    | Peak voltage, A-weighted, 32 samples per second, RL = 8 $\Omega$ (Notes 3, 4) | Into shutdown   |         | -66     | dBV           |
|                                  |        |   | Out of shutdown |         | -66     |               |
| Common-Mode Rejection Ratio      | CMRR   | fIN = 1kHz, input referred  |                 | 50      |         | dB            |

# MAX98300

## Mono 2.6W Class D Amplifier

### ELECTRICAL CHARACTERISTICS (continued)

(VPVDD = VSHDN = 5.0V, VPGND = 0V, AV = 12dB (GAIN = PVDD), RL = ∞, RL connected between OUT+ to OUT-, AC measurement bandwidth 20Hz to 22kHz, TA = TMIN to TMAX, unless otherwise noted. Typical values are at TA = +25°C.) (Notes 1, 2)

| PARAMETER                                | SYMBOL | CONDITIONS                       | MIN                          | TYP  | MAX | UNITS |  |
|--|--------|----------------------------------|------------------------------|------|-----|-------|--|
| Power-Supply Rejection Ratio<br>(Note 3) | PSRR   | VPVDD = 2.6V to 5.5V, TA = +25°C | 50                           | 70   |     | dB    |  |
|  |        | VRIPPLE = 200mVP-P               | f = 217Hz                    |      | 67  |       |  |
|  |        |                                  | f = 20kHz                    |      | 63  |       |  |
| Output Power                             | POUT   | fIN = 1kHz, RL = 4Ω              |                              | 2.1  |     | W     |  |
|  |        |                                  |                              | 2.6  |     |       |  |
|  |        | fIN = 1kHz, RL = 8Ω              |                              | 1.35 |     |       |  |
|  |        |                                  |                              | 1.65 |     |       |  |
|  |        |                                  | THD+N = 1%,<br>VPVDD = 3.7V  | 0.71 |     |       |  |
|  |        |                                  | THD+N = 10%,<br>VPVDD = 3.7V | 0.89 |     |       |  |
| Total Harmonic Distortion Plus<br>Noise  | THD+N  | fIN = 1kHz                       | RL = 4Ω<br>POUT = 1W         | 0.05 |     | %     |  |
|  |        |                                  | RL = 8Ω<br>POUT = 0.5W       | 0.04 |     | %     |  |
| Oscillator Frequency                     | fOSC   |                                  |                              | 300  |     | kHz   |  |
| Spread-Spectrum Bandwidth                |        |                                  |                              | ±10  |     | kHz   |  |
| Efficiency                               | η      | POUT = 1.3W, RL = 8Ω             |                              | 89   |     | %     |  |
| Noise                                    | VN     | AV = 0dB, A-weighted (Note 3)    |                              | 36   |     | μVRMS |  |
| Output Current Limit                     | ILIM   |                                  |                              | 2    |     | A     |  |
| Thermal Shutdown Level                   |        |                                  |                              | +160 |     | °C    |  |
| Thermal Shutdown Hysteresis              |        |                                  |                              | 20   |     | °C    |  |
| <b>DIGITAL INPUT (SHDN)</b>              |        |                                  |                              |      |     |       |  |
| Input-Voltage High                       | VINH   |                                  | 1.4                          |      |     | V     |  |
| Input-Voltage Low                        | VINL   |                                  |                              |      | 0.4 | V     |  |
| Input Leakage Current                    |        | TA = +25°C                       |                              |      | ±10 | μA    |  |

**Note 1:** All devices are 100% production tested at +25°C. All temperature limits are guaranteed by design.

**Note 2:** Testing performed with a resistive load in series with an inductor to simulate an actual speaker load. For RL = 4Ω, L = 33μH. For RL = 8Ω, L = 68μH.

**Note 3:** Amplifier inputs AC-coupled to ground.










**Note 4:** Mode transitions controlled by SHDN.

# MAX98300

## Mono 2.6W Class D Amplifier

### Typical Operating Characteristics

( $V_{PVDD} = V_{SHDN} = 5.0V$ ,  $V_{PGND} = 0V$ ,  $A_V = 12dB$ ,  $R_L = \infty$ , unless otherwise specified,  $R_L$  connected between  $OUT+$  to  $OUT-$ , AC measurement bandwidth 20Hz to 22kHz,  $T_A = +25^\circ C$ , unless otherwise noted.)

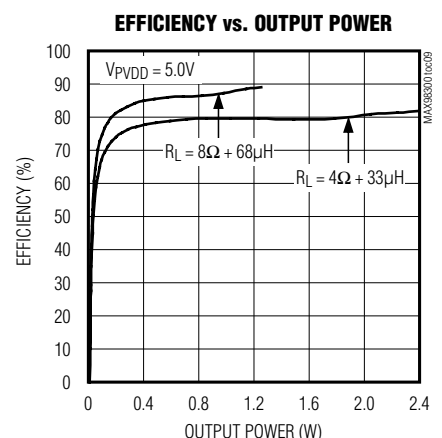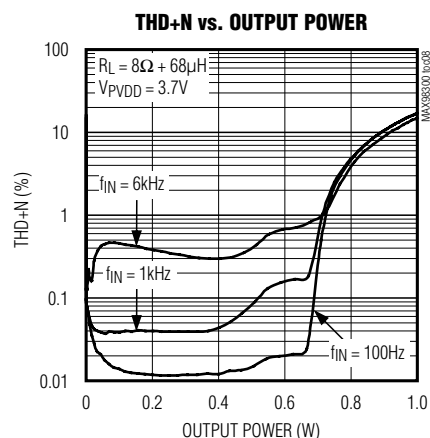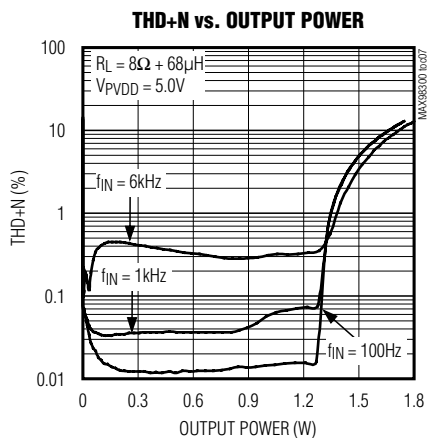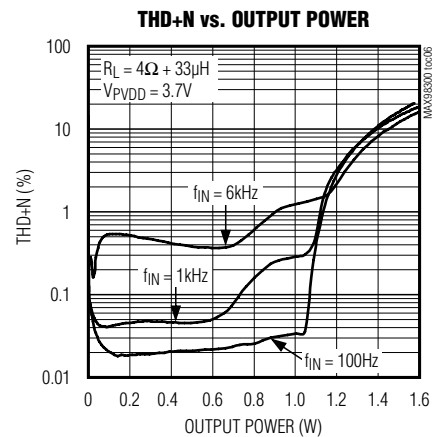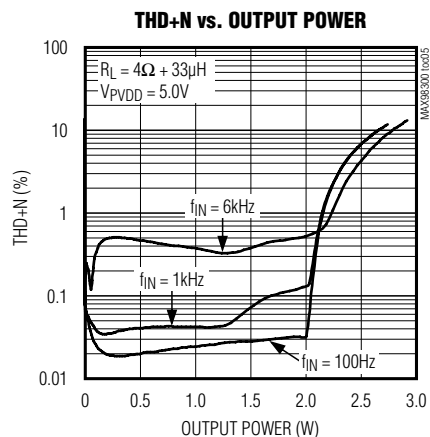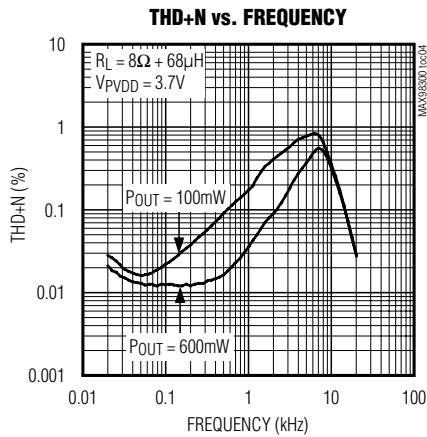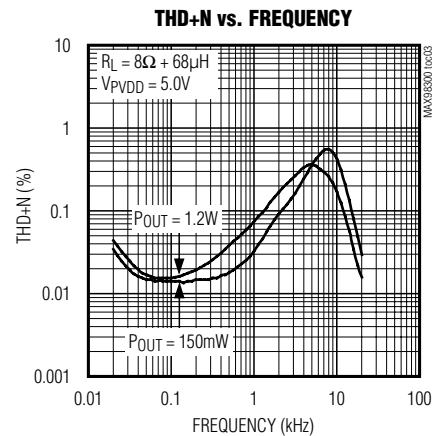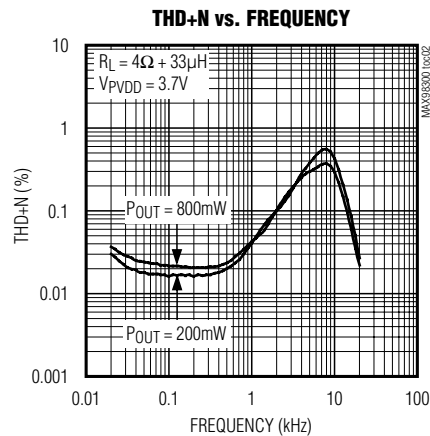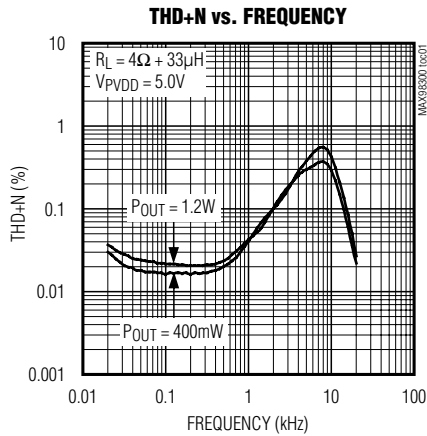


# MAX98300

## Mono 2.6W Class D Amplifier

### Typical Operating Characteristics (continued)

( $V_{PVDD} = V_{SHDN} = 5.0V$ ,  $V_{PGND} = 0V$ ,  $A_V = 12dB$ ,  $R_L = \infty$ , unless otherwise specified,  $R_L$  connected between OUT+ to OUT-, AC measurement bandwidth 20Hz to 22kHz,  $T_A = +25^\circ C$ , unless otherwise noted.)

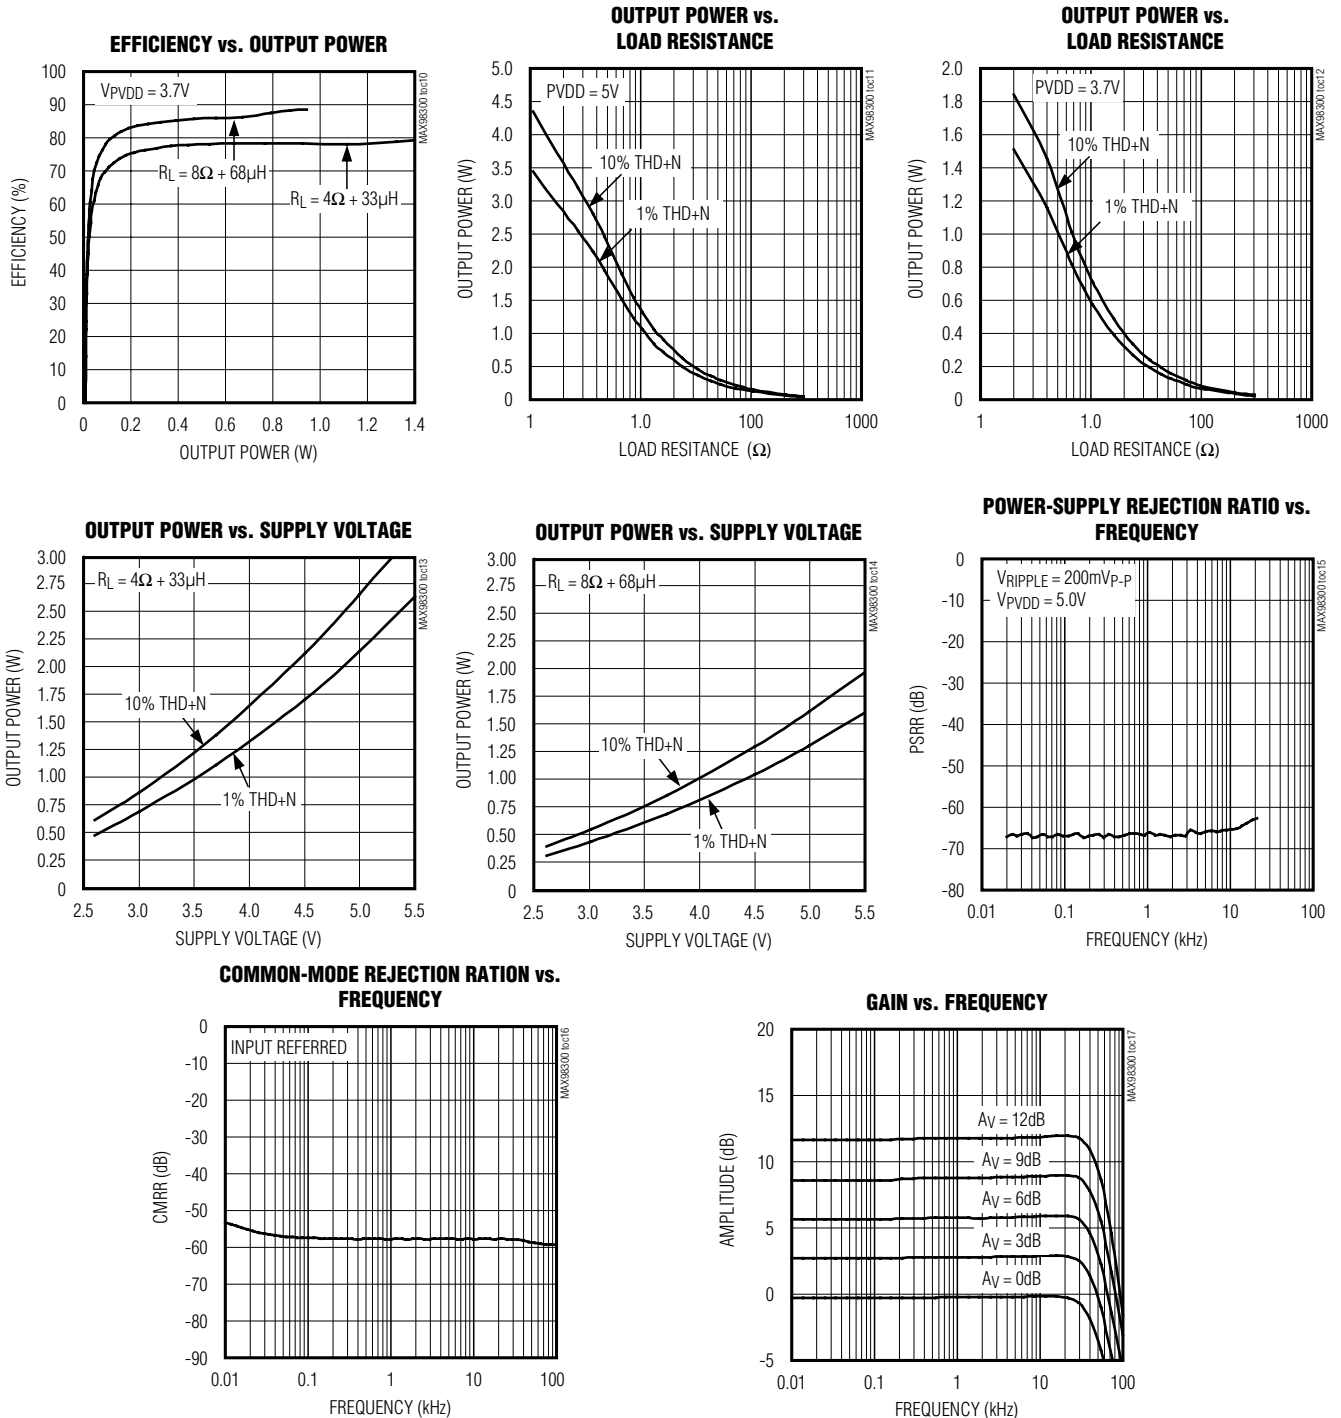


# MAX98300

## Mono 2.6W Class D Amplifier


### Typical Operating Characteristics (continued)

( $V_{PVDD} = V_{SHDN} = 5.0V$ ,  $V_{PGND} = 0V$ ,  $A_V = 12dB$ ,  $R_L = \infty$ , unless otherwise specified,  $R_L$  connected between  $OUT_+$  to  $OUT_-$ , AC measurement bandwidth 20Hz to 22kHz,  $T_A = +25^\circ C$ , unless otherwise noted.)


SHUTDOWN WAVEFORM

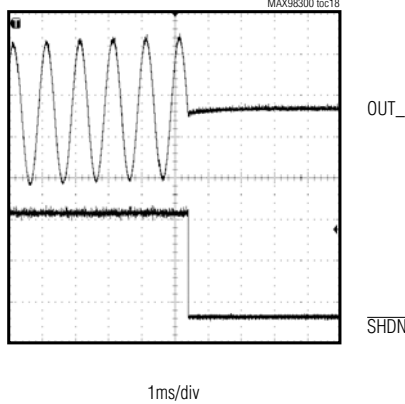


STARTUP WAVEFORM

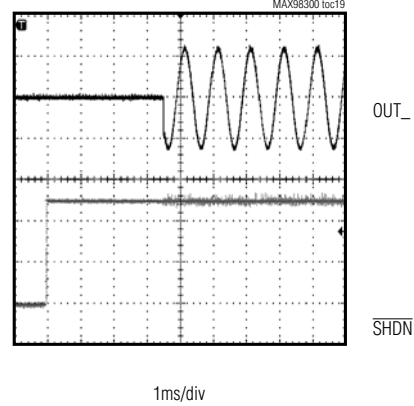


WIDEBAND OUTPUT SPECTRUM

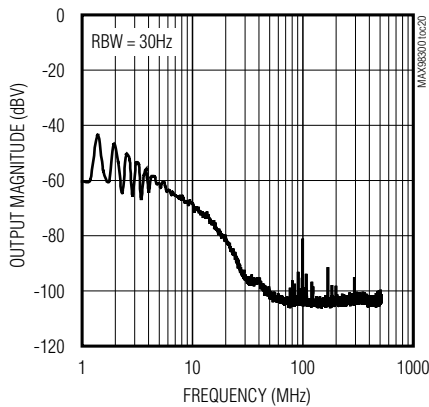


INBAND OUTPUT SPECTRUM

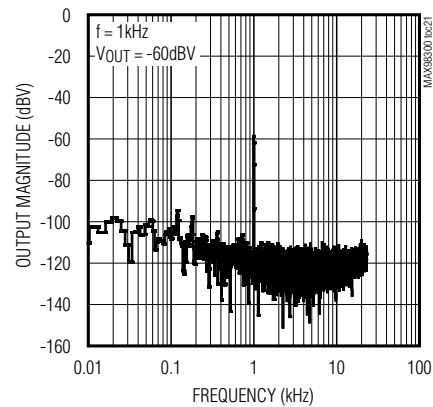

SUPPLY CURRENT vs. SUPPLY VOLTAGE

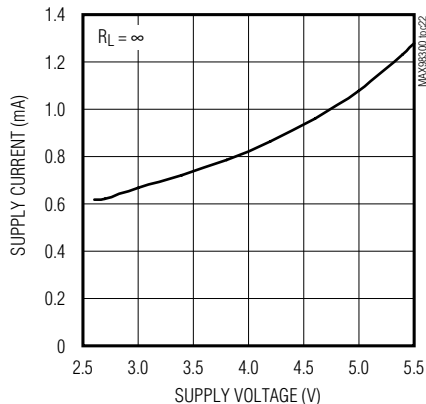


SHUTDOWN SUPPLY CURRENT vs. SUPPLY VOLTAGE

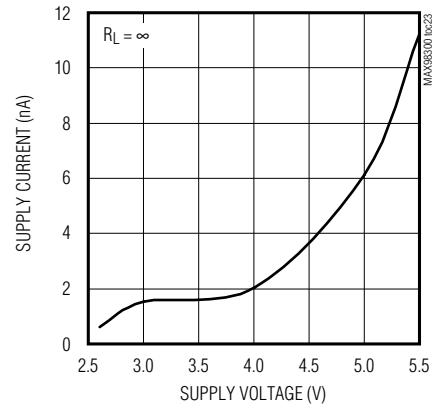

# MAX98300

## Mono 2.6W Class D Amplifier

### Pin Configurations

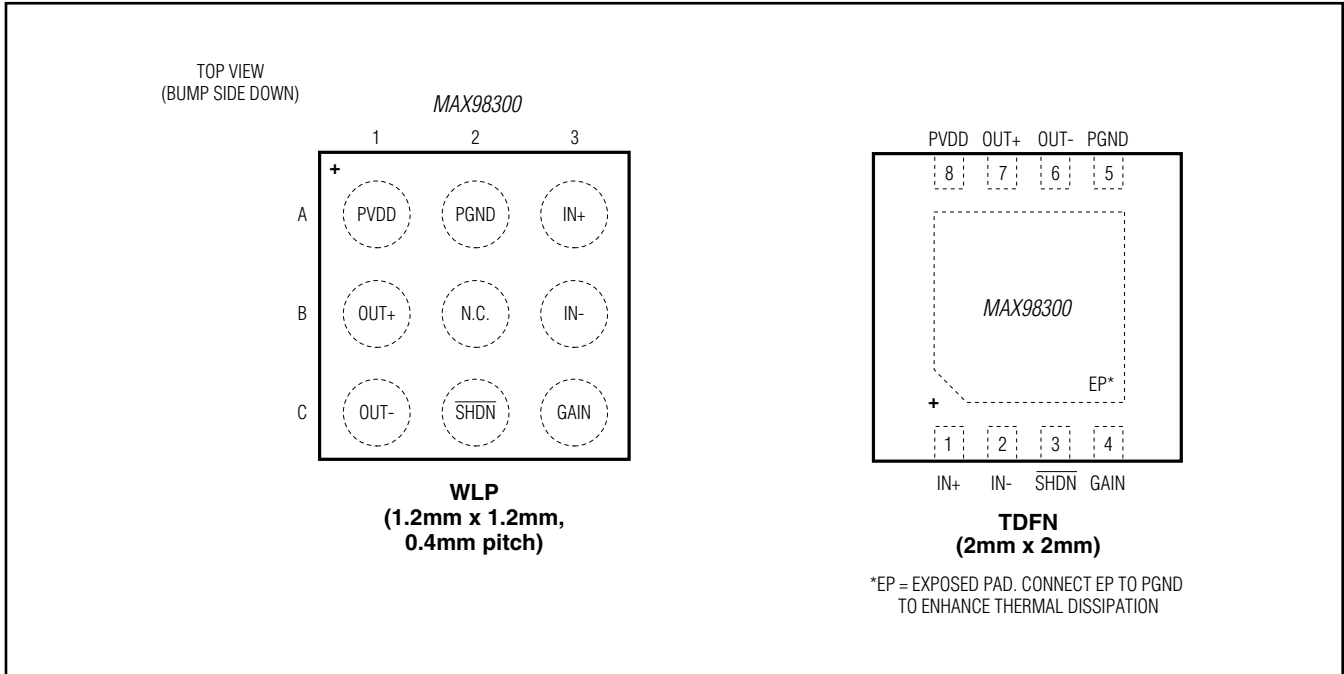

### Pin Description

| PIN     |     | NAME                     | FUNCTION  |
|---------|-----|--------------------------|---|
| TDFN-EP | WLP |                          |   |
| 1       | A3  | IN+                      | Noninverting Audio Input  |
| 2       | B3  | IN-                      | Inverting Audio Input   |
| 3       | C2  | $\overline{\text{SHDN}}$ | Active-Low Shutdown Input. Drive $\overline{\text{SHDN}}$ low to place the device in shutdown mode. |
| 4       | C3  | GAIN                     | Gain Selection. See Table 1 for gain settings.  |
| 5       | A2  | PGND                     | Power Ground  |
| 6       | C1  | OUT-                     | Negative Speaker Output   |
| 7       | B1  | OUT+                     | Positive Speaker Output   |
| 8       | A1  | PVDD                     | Power Supply. Bypass PVDD to PGND with 0.1 $\mu$ F and 10 $\mu$ F capacitors.                       |
| —       | B2  | N.C.                     | No Connection   |
| —       | —   | EP                       | Exposed Pad (TDFN only). Connect exposed pad to a solid ground plane.                               |

# MAX98300

## Mono 2.6W Class D Amplifier

### Detailed Description

The MAX98300 features industry-leading quiescent current, low-power shutdown mode, comprehensive click-and-pop suppression, and excellent RF immunity.

The device offers Class AB audio performance with Class D efficiency in a minimal board-space solution.

The Class D amplifier features spread-spectrum modulation, edge-rate, and overshoot control circuitry that offers significant improvements to switch-mode amplifier radiated emissions.

The MAX98300 amplifier features click-and-pop suppression that reduces audible transients on startup and shutdown. The amplifier includes thermal overload and short-circuit protection.

### Class D Speaker Amplifier

The MAX98300 filterless Class D amplifier offers much higher efficiency than Class AB amplifiers. The high efficiency of a Class D amplifier is due to the switching operation of the output stage transistors. Any power loss associated with the Class D output stage is mostly due to the  $I^2R$  loss of the MOSFET on-resistance and quiescent current overhead.

### Ultra-Low EMI Filterless Output Stage

Traditional Class D amplifiers require the use of external LC filters, or shielding, to meet EN55022B electromagnetic-interference (EMI) regulation standards. Maxim's patented active emissions-limiting edge-rate control circuitry and spread-spectrum modulation reduces EMI emissions, while maintaining up to 89% efficiency.

Maxim's patented spread-spectrum modulation mode flattens wideband spectral components, while proprietary techniques ensure that the cycle-to-cycle variation of the switching period does not degrade audio reproduction or efficiency. The MAX98300's spread-spectrum modulator randomly varies the switching frequency by  $\pm 10\text{kHz}$  around the center frequency (300kHz). Above 10MHz, the wideband spectrum looks like noise for EMI purposes (Figure 1).

### Speaker Current Limit

If the output current of the speaker amplifier exceeds the current limit (2A typ), the MAX98300 disables the outputs for approximately 130 $\mu\text{s}$ . At the end of 130 $\mu\text{s}$ , the outputs are re-enabled. If the fault condition still exists, the MAX98300 continues to disable and re-enable the outputs until the fault condition is removed.

### Selectable Gain

The MAX98300 offers five programmable gain selections through a single gain input (GAIN).

Table 1. Gain Control Configuration

| GAIN PIN  | MAXIMUM GAIN (dB) |
|---|-------------------|
| Connect to PVDD                                 | 12                |
| Connect to PVDD through 100k $\Omega$ $\pm 5\%$ | 9                 |
| Not connected                                   | 6                 |
| Connect to PGND through 100k $\Omega$ $\pm 5\%$ | 3                 |
| Connect to PGND                                 | 0                 |

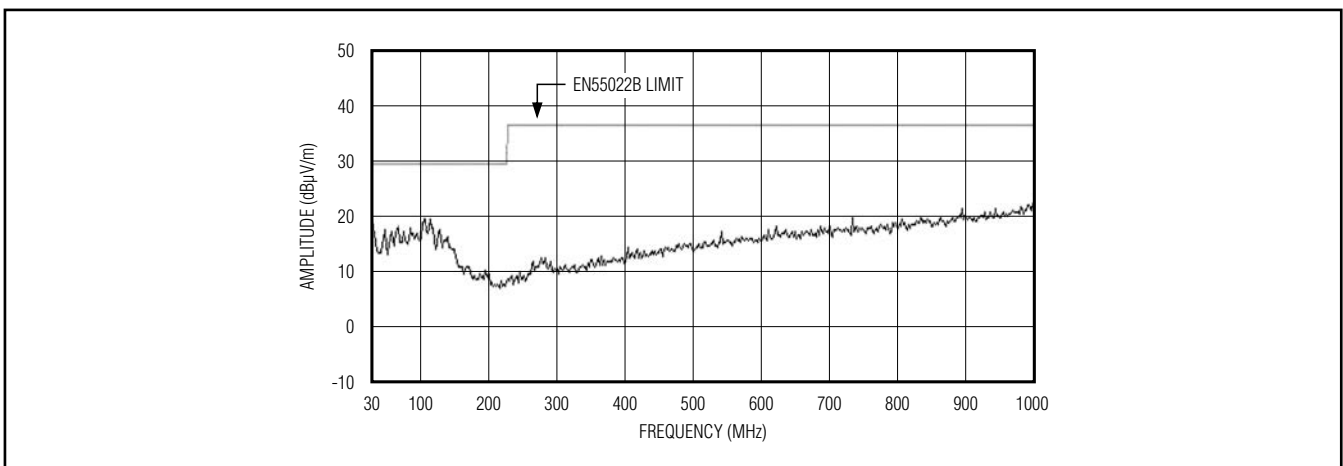


Figure 1. EMI with 60cm of Speaker Cable and No Output Filtering



# MAX98300

## Mono 2.6W Class D Amplifier

### Shutdown

The MAX98300 features a low-power shutdown mode, drawing less than 0.1µA of supply current. Drive SHDN low to put the MAX98300 into shutdown.

### Click-and-Pop Suppression

The MAX98300 speaker amplifier features Maxim's comprehensive click-and-pop suppression. During startup, the click-and-pop suppression circuitry reduces any audible transient sources internal to the device. When entering shutdown, the differential speaker outputs ramp down to PGND quickly and simultaneously.

## Applications Information

### Filterless Class D Operation

Traditional Class D amplifiers require an output filter. The filter adds cost, size, and decreases efficiency and THD+N performance. The MAX98300's filterless modulation scheme does not require an output filter (Figure 1).

Because the switching frequency of the MAX98300 is well beyond the bandwidth of most speakers, voice coil movement due to the switching frequency is very small. Use a speaker with a series inductance > 10µH. Typical 8Ω speakers exhibit series inductances in the 20µH to 100µH range.

### Component Selection

#### Speaker Amplifier Power Supply Input (PVDD)

PVDD powers the speaker amplifier. PVDD ranges from 2.6V to 5.5V. Bypass PVDD with a 0.1µF and 10µF capacitor to PGND. Apply additional bulk capacitance at the device if long input traces between PVDD and the power source are used.

#### Input Filtering

The input-coupling capacitor ( $C_{IN}$ ), in conjunction with the amplifier's internal input resistance ( $R_{IN}$ ), forms a high-pass filter that removes the DC bias from the incoming signal. These capacitors allow the amplifier to bias the signal to an optimum DC level.

Assuming zero source impedance with a gain setting of  $A_V = 6\text{dB}$ ,  $9\text{dB}$ , or  $12\text{dB}$ ,  $C_{IN}$  is:

$$C_{IN} = \frac{8}{f_{-3\text{dB}}} [\mu\text{F}]$$

with a gain setting of  $A_V = 3\text{dB}$ ,  $C_{IN}$  is:

$$C_{IN} = \frac{5.7}{f_{-3\text{dB}}} [\mu\text{F}]$$

with a gain setting of  $A_V = 0\text{dB}$ ,  $C_{IN}$  is:

$$C_{IN} = \frac{4}{f_{-3\text{dB}}} [\mu\text{F}]$$

where  $f_{-3\text{dB}}$  is the -3dB corner frequency. Use capacitors with adequately low voltage-coefficient for best low-frequency THD performance.

### Layout and Grounding

Proper layout and grounding are essential for optimum performance. Good grounding improves audio performance and prevents switching noise from coupling into the audio signal.

Use wide, low-resistance output traces. As load impedance decreases, the current drawn from the device outputs increase. At higher current, the resistance of the output traces decreases the power delivered to the load. For example, if 2W is delivered from the speaker output to a 4Ω load through a 100mΩ trace, 49mW is consumed in the trace. If power is delivered through a 10mΩ trace, only 5mW is consumed in the trace. Wide output, supply, and ground traces also improve the power dissipation of the device.


The MAX98300 is inherently designed for excellent RF immunity. For best performance, add ground fills around all signal traces on top or bottom PCB planes.

The MAX98300 TDFN-EP package features an exposed thermal pad on its underside. This pad lowers the package's thermal resistance by providing a heat conduction path from the die to the PCB. Connect the exposed thermal pad to the ground plane by using a large pad and multiple vias.

# MAX98300

## Mono 2.6W Class D Amplifier

### Functional Diagram

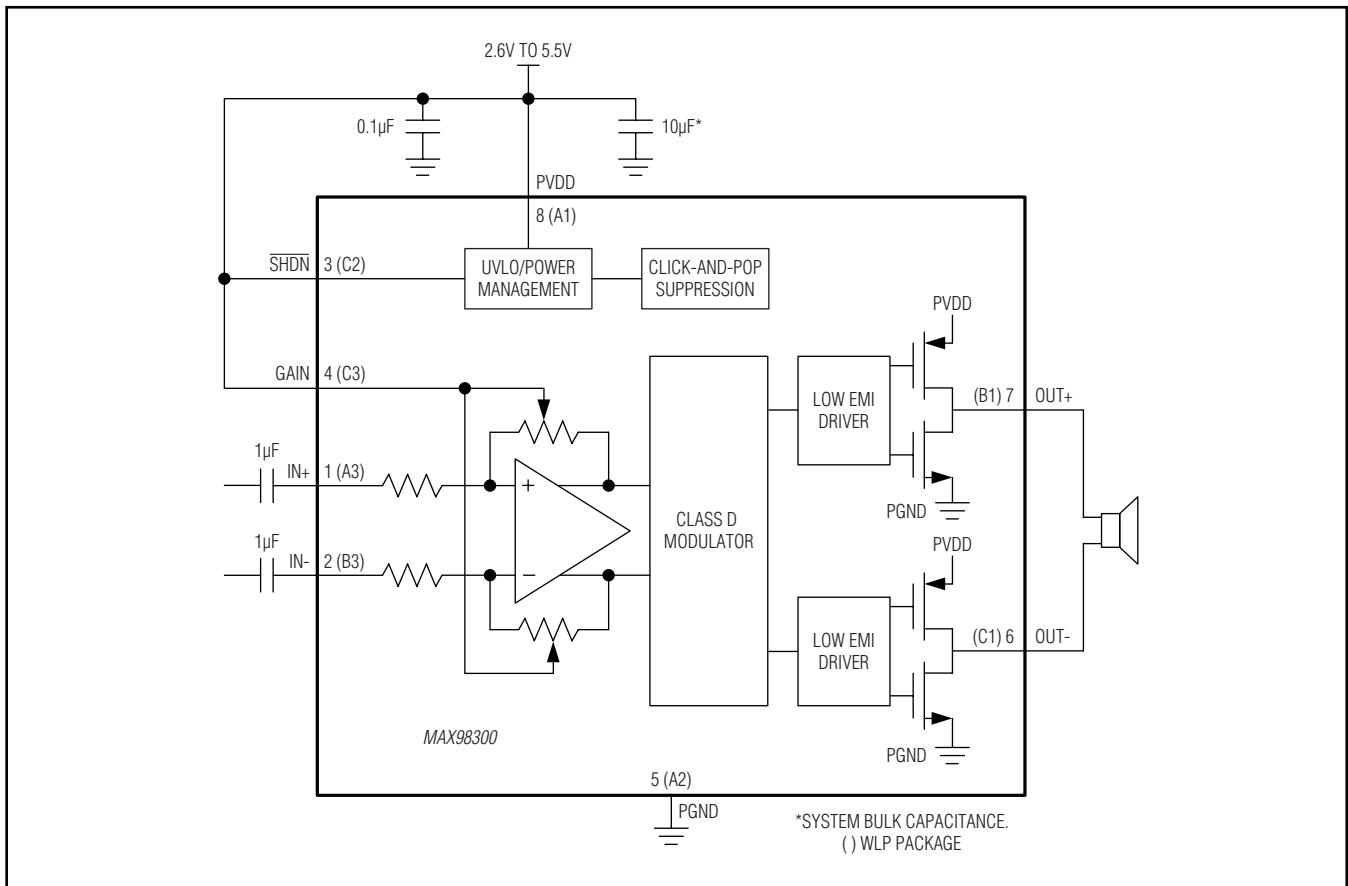

### Chip Information

PROCESS: CMOS


# MAX98300

## Mono 2.6W Class D Amplifier

### Package Information

For the latest package outline information and land patterns, go to [www.maximintegrated.com/packages](http://www.maximintegrated.com/packages). Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE TYPE | PACKAGE CODE | OUTLINE NO.             | LAND PATTERN NO.        |
|--------------|--------------|-------------------------|-------------------------|
| 8 TDFN-EP    | T822+2       | <a href="#">21-0168</a> | <a href="#">90-0065</a> |
| 9 WLP        | W91B1+7      | <a href="#">21-0459</a> | —                       |

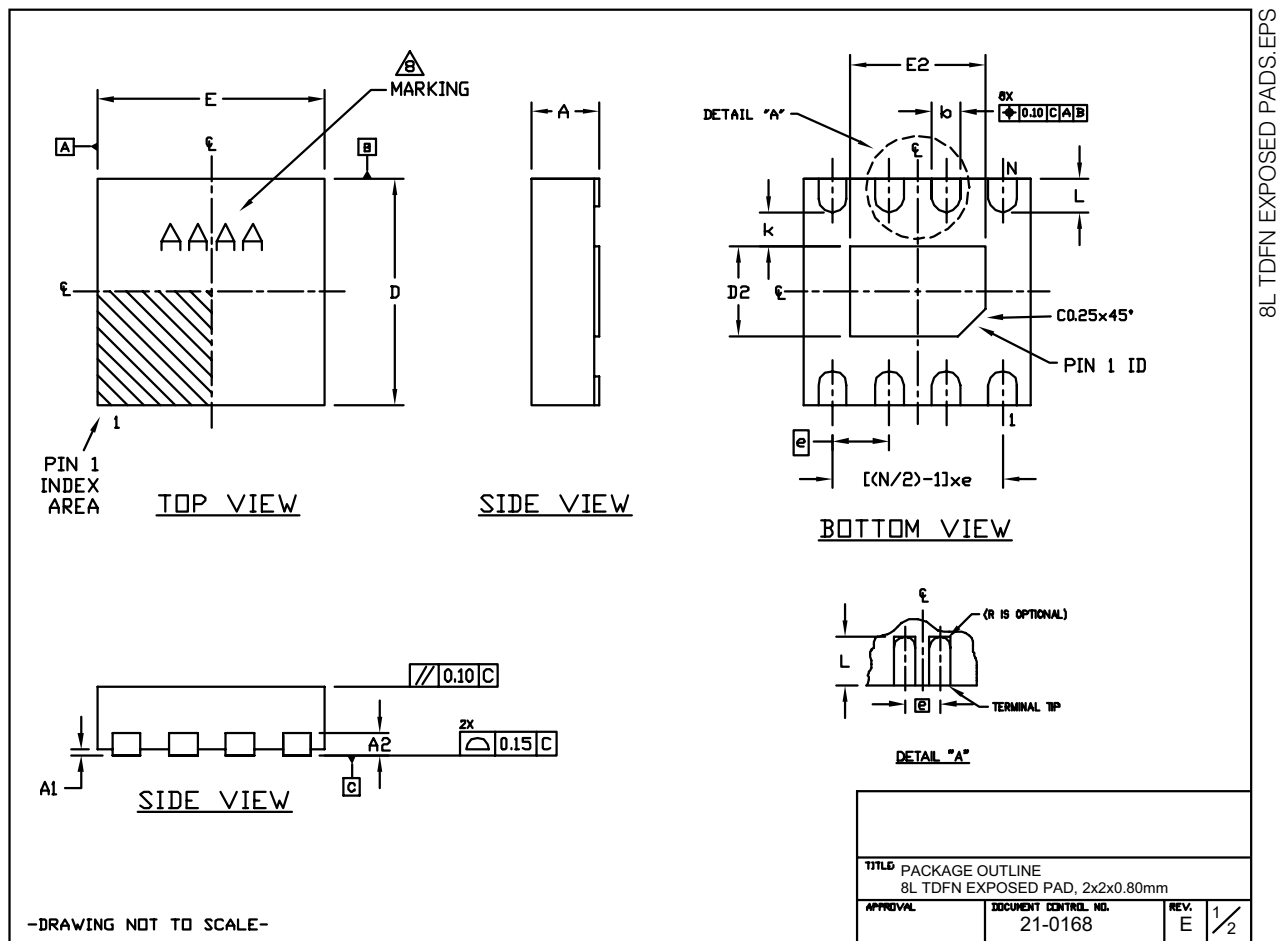

# MAX98300

## Mono 2.6W Class D Amplifier


### Package Information (continued)

For the latest package outline information and land patterns, go to [www.maximintegrated.com/packages](http://www.maximintegrated.com/packages). Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| COMMON DIMENSIONS |           |      |
|-------------------|-----------|------|
| SYMBOL            | MIN.      | MAX. |
| A                 | 0.70      | 0.80 |
| D                 | 1.90      | 2.10 |
| E                 | 1.90      | 2.10 |
| A1                | 0.00      | 0.05 |
| L                 | 0.20      | 0.40 |
| k                 | 0.25 MIN. |      |
| A2                | 0.20 REF. |      |

| PACKAGE VARIATIONS |   |           |           |           |           |       |               |
|--------------------|---|-----------|-----------|-----------|-----------|-------|---------------|
| PKG. CODE          | N | D2        | E2        | e         | b         | r     | [(N/2)-1] x e |
| T822-1             | 8 | 0.70±0.10 | 1.30±0.10 | 0.50 TYP. | 0.25±0.05 | 0.125 | 1.50 REF      |
| T822-2             | 8 | 0.80±0.10 | 1.20±0.10 | 0.50 TYP. | 0.25±0.05 | 0.125 | 1.50 REF      |

#### NOTES:

1. ALL DIMENSIONS ARE IN mm. ANGLES IN DEGREES.
2. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS. COPLANARITY SHALL NOT EXCEED 0.08mm.
3. WARPAGE SHALL NOT EXCEED 0.08mm.
4. PACKAGE LENGTH/PACKAGE WIDTH ARE CONSIDERED AS SPECIAL CHARACTERISTIC(S).
5. COMPLY TO JEDEC MO229 EXCEPT D2 AND E2 DIMENSIONS.
6. 'N' IS THE TOTAL NUMBER OF LEADS.
7. NUMBER OF LEADS SHOWN ARE FOR REFERENCE ONLY.
8.  MARKING IS FOR PACKAGE ORIENTATION REFERENCE ONLY.
9. ALL DIMENSIONS APPLY TO BOTH LEADED AND PbFREE PARTS.

-DRAWING NOT TO SCALE-



|   |                      |      |     |
|---|----------------------|------|-----|
| TITLE: PACKAGE OUTLINE<br>8L TDFN EXPOSED PAD, 2x2x0.80mm |                      |      |     |
| APPROVAL  | DOCUMENT CONTROL NO. | REV. | 2/2 |
|   | 21-0168              | E    |     |

# MAX98300

## Mono 2.6W Class D Amplifier


### Package Information (continued)

For the latest package outline information and land patterns, go to [www.maximintegrated.com/packages](http://www.maximintegrated.com/packages). Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

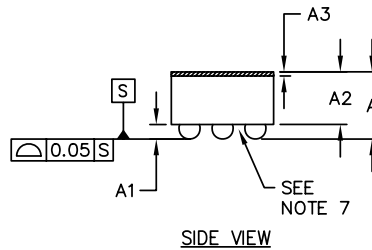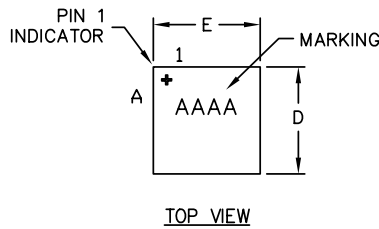

| COMMON DIMENSIONS |             |
|-------------------|-------------|
| A                 | 0.64±0.05   |
| A1                | 0.19±0.03   |
| A2                | 0.45 REF    |
| A3                | 0.025 BASIC |
| b                 | ∅0.27±0.03  |
| D1                | 0.80 BASIC  |
| E1                | 0.80 BASIC  |
| e                 | 0.40 BASIC  |
| SD                | 0.00 BASIC  |
| SE                | 0.00 BASIC  |

| PKG. CODE | E    |      | D    |      | DEPOPULATED BUMPS |
|-----------|------|------|------|------|-------------------|
|           | MIN  | MAX  | MIN  | MAX  |                   |
| W91B1+7   | 1.22 | 1.30 | 1.22 | 1.30 | NONE              |
| W91C1+1   | 1.56 | 1.63 | 1.38 | 1.45 | NONE              |



**NOTES:**

1. Terminal pitch is defined by terminal center to center value.
2. Outer dimension is defined by center lines between scribe lines.
3. All dimensions in millimeters.
4. Marking shown is for package orientation reference only.
5. Tolerance is ± 0.02mm unless specified otherwise.
6. All dimensions apply to PbFree (+) package codes only.
7. Front-side finish can be either Black or Clear.

-DRAWING NOT TO SCALE-

|  |                                 |            |
|--|---------------------------------|------------|
| TITLE:<br>PACKAGE OUTLINE<br>9 BUMPS, WLP PKG. 0.4mm PITCH |                                 |            |
| APPROVAL   | DOCUMENT CONTROL NO.<br>21-0459 | REV. B 1/1 |

# MAX98300

## Mono 2.6W Class D Amplifier

### Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION     | PAGES CHANGED |
|-----------------|---------------|-----------------|---------------|
| 0               | 7/10          | Initial release | —             |



Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Audio Amplifiers](#) category:*

*Click to view products by [Maxim](#) manufacturer:*

Other Similar products are found below :

[LV47002P-E](#) [NCP2811AFCT1G](#) [NCP2890AFCT2G](#) [SSM2377ACBZ-R7](#) [IS31AP4915A-QFLS2-TR](#) [NCP2820FCT2G](#) [TDA1591T](#)  
[TDA7563AH](#) [SSM2529ACBZ-R7](#) [MAX9890AETA+T](#) [TS2012EIJT](#) [NCP2809BMUTXG](#) [NJW1157BFC2](#) [SSM2375CBZ-REEL7](#)  
[IS31AP4996-GRLS2-TR](#) [STPA002OD-4WX](#) [NCP2823BFCT1G](#) [MAX9717DETA+T](#) [MAX9717CETA+T](#) [MAX9724AEBC+TG45](#)  
[LA4450L-E](#) [IS31AP2036A-CLS2-TR](#) [TDA7563ASMTR](#) [AS3561-DWLT](#) [SSM2517CBZ-R7](#) [MP1720DH-12-LF-P](#) [SABRE9601K](#)  
[THAT1646W16-U](#) [PAM8965ZLA40-13](#) [BD37532FV-E2](#) [BD5638NUX-TR](#) [BD37512FS-E2](#) [BD37543FS-E2](#) [BD3814FV-E2](#)  
[TPA3140D2PWPR](#) [TS2007EIJT](#) [IS31AP2005-DLS2-TR](#) [SSM2518CPZ-R7](#) [AS3410-EQFP-500](#) [FDA4100LV](#) [TS4994EIJT](#) [NCP2820FCT1G](#)  
[NCP2823AFCT2G](#) [NCS2211MNTXG](#) [CPA2233CQ16-A1](#) [OPA1604AIPWR](#) [OPA1612AQDRQ1](#) [TDA7492](#) [SSM2519ACBZ-R7](#)  
[ZXCD1210JB16TA](#)