


- Meets IEEE 802.3ab Standards.
- Suitable For End-span and Mid-span PoE+ Applications.
- 10/100/1000 Base-T, Surface Mount Type, Open Header .
- 1150mA Current Capability Per POE Port / Two-pair.
- RoHS Compliant.
- Operating temperature range: -40 °C to +85 °C.




Electrical Specifications @25 °C								
Part Number	OCL(uH Min) @100KHz, 0.1V	Return Loss (dB Min) Z OUT = 100 OHM±15%		Cross talk (dB Min)		REJECTION RATIO COMMON MODE (dB Min)		
	With 35mA DC Bias @-40°C&+85°C	1-40MHz	40.1-100MHz	1MHz	10-100MHz	2MHz	30-200MHz	
G24102CE-Z	135	-16	-10+20*log(f/80)	-50	-55+22*log(f/10)	-50	-15+20*log(f/200)	
	Continue							
	OCL(uH Min) @100KHz,0.1V	Turns Ratio (±2%)	Insertion Loss (dB Max)		DC RESISTANCE BALANCE	C _{ww} (pF TYP)	HI-POT (Vrms)	
	With 25mA DC Bias @-40°C&+85°C		100KHz	1-125MHz				±.05 OHMS MAX
350	1CT:1CT	-1.2	-0.2-0.002*f*1.4	CENTER TAP SYMMETRY	25	1500		

MECHANICAL

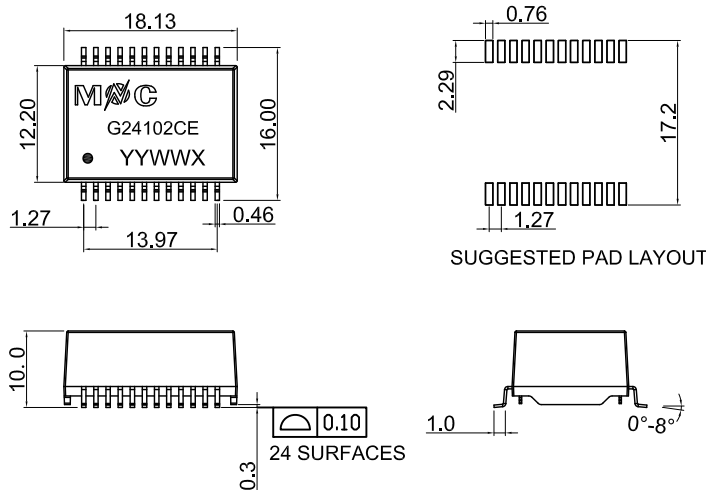

Unless otherwise specified all tolerances are:±0.25 in mm

SCHEMATICS

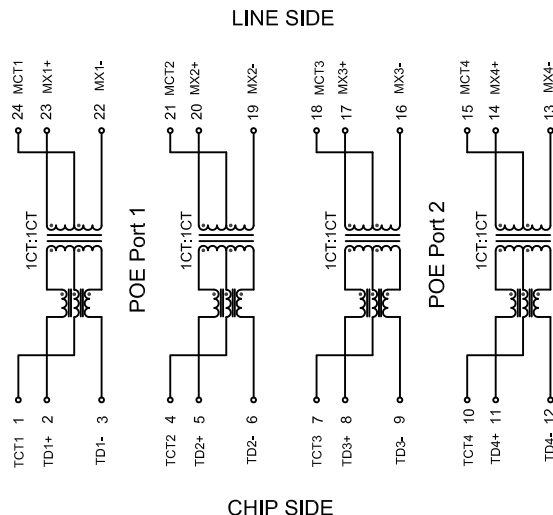

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Transformers](#) / [Signal Transformers](#) category:

Click to view products by [Mentech](#) manufacturer:

Other Similar products are found below :

[CU4S0506AT-2655-H1](#) [CX2041NLT](#) [MGPWT-00449-P](#) [PE-64961](#) [H5020FNLT](#) [H5077NLT](#) [1812WBT2-4](#) [1879479-1](#) [PA1528ANL](#)
[T1137NLT](#) [T3012NL](#) [PE-65812FNL](#) [PE-65848FNLT](#) [H5019EFNL](#) [CX2045ALNLT](#) [MET-14](#) [MGPWT-00059-P](#) [MGPWT-00266-P](#)
[MGPWT-00278-P](#) [MGPWT-00431-P](#) [TTC-100](#) [TTC-143-H](#) [TTC-5032-1](#) [4-1879391-0](#) [100213](#) [T1142NL](#) [HX5020FNLT](#) [HX5014FNLT](#)
[T1124NL](#) [1879732-1](#) [2-1879391-5](#) [B8846NL](#) [MABA-010321-CT1A42](#) [TX1341NL](#) [H0013FNL](#) [H5020FNL](#) [H2009FNLT](#) [H5004NLT](#) [X-](#)
[1619](#) [T5008NLT](#) [PE-68517T](#) [MGPWT-00339-P](#) [HX5084FNLT](#) [H5014FNLT](#) [TX1473NLT](#) [PE-69011NLT](#) [CX2043LNLT](#) [H7137FNLT](#)
[H1259NLT](#) [LM-LP-1005L](#)