



KVX1905 - KVX1975 / KVX1401 / KVX1501
SURFACE MOUNT VARACTOR DIODES
SOT-23 SUPER-HYPERABRUPT JUNCTION
RoHS Compliant

GENERAL DESCRIPTION

Designed for the demands of today's commercial surface mount products, these devices offer the high quality and reliability of our military microwave devices in a cost effective SOT-23 plastic package. Capacitance values are available for VCO's from VHF thru 1.5 GHz. High C_T ratios provide excellent bandwidth and straight line mid-range sensitivities in a low voltage varactor. Our proprietary grown junction epitaxy provides the highest Q values in the industry.

This series of diodes meets RoHS requirements per EU Directive 2002/95/EC.

KEY FEATURES

- Silicon Mesa Geometry
- High Reliability Dense SiO₂ Passivation
- Lower Parasitics
- Widest Tuning Ratios
- Highest Q Available
- Mil Spec Performance/Economy Price
- Tape & Reel Available for Pick & Place Assembly
- RoHS Compliant ¹

APPLICATIONS

These devices are the ideal choice for wireless fixed, mobile, or portable applications. Devices are available in package style 23-0 (single die) or 23-4 (common cathode, 2 die). Some limitations apply. Consult factory for availability.


APPLICATION/BENEFITS

- Low Voltage Wireless Open Loop VCO's
- Low Voltage Wireless PLL VCO's
- TCXO's, VCXO's, VVF's
- Phase Shifter

¹ These devices are supplied with a matte tin finish suitable for RoHS compliant assembly.

ABSOLUTE MAXIMUM RATINGS @ 25°C

Rating	Symbol	Value	Unit
Power Dissipation (De-rated linearly to 0 at T _J (max))	P _D	250	mW
Leakage Current @ 10 V	I _R	50	nA
Storage Temperature	T _{STG}	-55 to +125	°C
Operating Temperature	T _{OP}	-55 to +125	°C

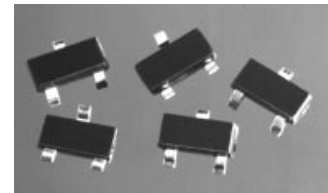

For the most current data, consult MICROSEMI's website: www.MICROSEMI.com
 Specifications are subject to change, consult the RFIS factory at (978) 442-5600 for the latest information.



KVX1905 - KVX1975 / KVX1401 / KVX1501
SURFACE MOUNT VARACTOR DIODES
SOT-23 SUPER-HYPERABRUPT JUNCTION
RoHS Compliant

DEVICE ELECTRICAL PARAMETERS AT 25°C

(4V & 8V) UHF SUPER HYPERABRUPT VARACTORS

Model Number	V _B (V) I _R =10μA (Min)	C _T (pF) @1V (Min)	C _T (pF) @2.5V	C _T (pF) @4V (Max)	C _T (pF) @8V (Max)	Q @4V, 50 MHz (Min)
KVX1975	12	9.0	4.5 – 6.5	3.0	--	400
KVX1932A	12	13	6.5 – 10.0	--	2.7	750
KVX1922A	12	17	8.5 – 13.0	--	3.2	600
KVX1952A	12	26	13.0 – 20.0	--	4.7	500
KVX1912A	12	36	18.0 – 27.0	--	6.2	400

(6V) UHF SUPER HYPERABRUPT VARACTORS

Model Number	V _B (V) I _R =10μA (Min)	C _T (pF) @1V	Ratio C _{T1} / C _{T3}	Ratio C _{T1} / C _{T6}	Q @4V, 50 MHz (Min)
KVX1965A	12	3.0 – 3.6	1.4 – 1.9	2.6 – 3.3	1500
KVX1945A	12	5.85 – 7.15	1.6 – 2.0	2.8 – 3.4	1200
KVX1935A	12	10.35 – 12.65	1.6 – 2.0	2.9 – 3.4	1000
KVX1925A	12	15.5 – 18.5	1.6 – 2.0	3.0 – 3.5	900
KVX1905A	12	45 - 54	1.6 – 2.0	3.0 – 3.5	750




(10V) UHF SUPER HYPERABRUPT VARACTORS

Model Number	V _B (V) I _R =10μA (Min)	C _T (pF) @2V (Min - Max)	C _T (pF) @7V (Typ)	C _T (pF) @10V (Min - Max)	Q @2V, 10 MHz (Min)
KVX1401	12	46 – 68	6.1	4.2 – 5.2	75
KVX1501	12	100 – 150	13.0	8.6 – 10.6	50

For the most current data, consult MICROSEMI's website: www.MICROSEMI.com
 Specifications are subject to change, consult the RFIS factory at (978) 442-5600 for the latest information.





KVX1905 - KVX1975 / KVX1401 / KVX1501
 SURFACE MOUNT VARACTOR DIODES
 SOT-23 SUPER-HYPERABRUPT JUNCTION
 RoHS Compliant

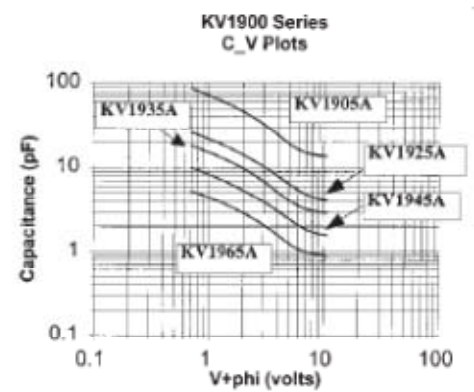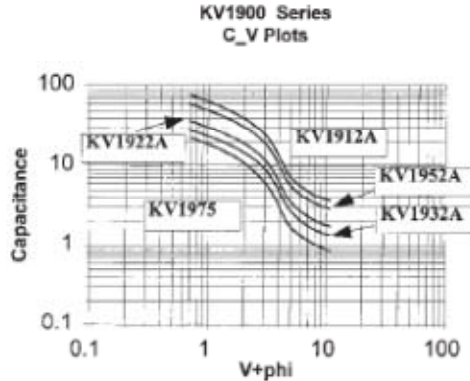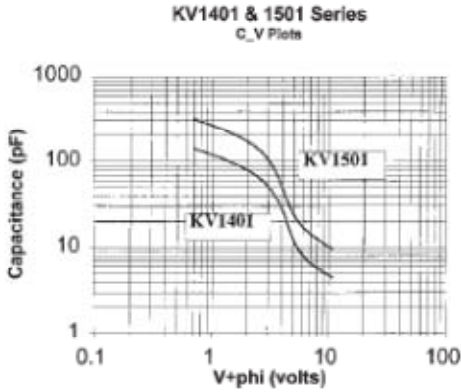

PACKAGE STYLE 23

CONFIGURATIONS

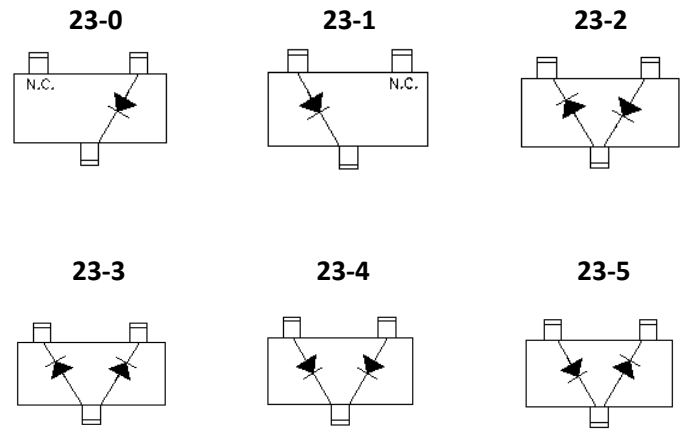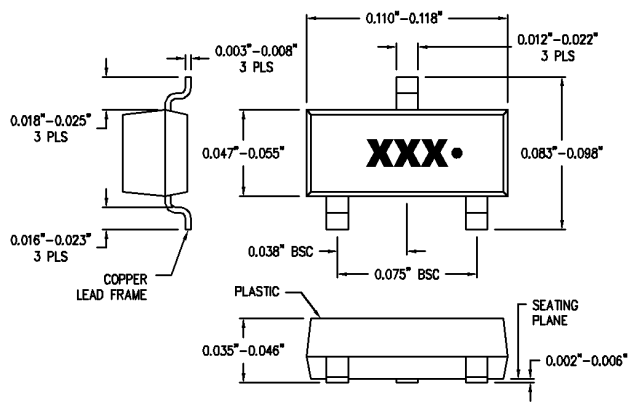

Revision History

Revision Level / Date	Para. Affected	Description
2009-02-02	-	Initial Release
1 / 12 November 2013	-	Reformat

For the most current data, consult MICROSEMI's website: www.MICROSEMI.com
 Specifications are subject to change, consult the RFIS factory at (978) 442-5600 for the latest information.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Varactor Diodes](#) category:

Click to view products by [Microchip](#) manufacturer:

Other Similar products are found below :

[MA46H201-1056](#) [MAVR-001330-12790T](#) [MVAM108](#) [SMV1233-079](#) [SVC704-TL-E](#) [SVC710-TL-E](#) [1SV324TPH3F](#) [MAVR-000083-0287AT](#) [MAVR-044769-12790T](#) [SVC270-TL-E](#) [RKV501KJ#R1](#) [MA46H204-1056](#) [MA46H202-1088](#) [MA46H202-1056](#) [MA46H203-1088](#) [MA46H203-1056](#) [MA46H120](#) [MA46H070-1056](#) [SMV1275-079LF](#) [SVC272-TL-E](#) [GC2510-17](#) [MAVR-044769-02870T](#) [MGV1252208052X](#) [MAVR-001350-12790T](#) [SMV1251-040LF](#) [MAVR-000409-0287FT](#) [MX1977](#) [KVX2301-23-0](#) [KVX3901A-23-4](#) [KVX1501-23-0](#) [KVX2132-23-0](#) [KVX38S2-23-0](#) [KVX3901A-23-0](#) [KVX2122-23-0](#) [MPV2100-206](#) [KVX2001-23-0](#) [GC1213-23-0](#) [GC15006-152](#) [MA46603-276](#) [SMVA1253-079LF](#) [MGV125-08-0805-2](#) [MAVR-000079-0287FT](#) [MA46H072-1056](#) [MA46H071-1056](#) [MAVR-000120-12030P](#) [BB844E6327HTSA1](#) [BB535E7904HTSA1](#) [BBY5303WE6327HTSA1](#) [BBY5802VH6327XTSA1](#) [BBY6602VH6327XTSA1](#)