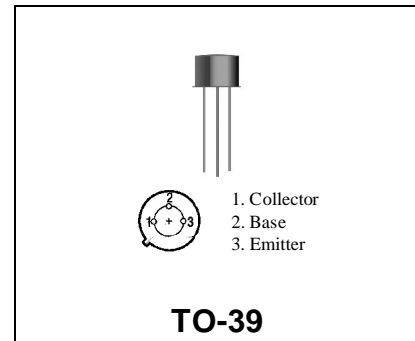


**RF & MICROWAVE TRANSISTORS
VHF FM MOBILE APPLICATIONS**
Features

- 175 MHz
- 12.5 VOLTS
- $P_{OUT} = 4.0 \text{ W MINIMUM}$
- $G_P = 12.0 \text{ dB}$
- GROUNDED EMITTER


DESCRIPTION:

The SD1127 is a epitaxial silicon NPN transistor designed primarily for VHF mobile communications. The chip of this transistor is mounted on a beryllia pill to isolate the collector lead and ground the emitter lead for high gain performance

ABSOLUTE MAXIMUM RATINGS (T_{case} = 25°C)

Symbol	Parameter	Value	Unit
V _{CBO}	Collector-Base Voltage	36	V
V _{CEO}	Collector-Emitter Voltage	18	V
V _{CES}	Collector-Emitter Voltage	36	V
V _{EBO}	Emitter – Base Voltage	4.0	V
I _C	Collector Current	.64	A
P _{tot}	Total Power Dissipation	8.0	W
T _{STG}	Storage Temperature	-65 + 200	°C
T _J	Junction Temperature	+200	°C

Thermal Data

R _{TH(J-C)}	Junction-case Thermal Resistance	21.9	°C/W
----------------------	----------------------------------	------	------

ELECTRICAL SPECIFICATIONS (T_{case} = 25°C)
STATIC

Symbol	Test Conditions		Value			Unit
			Min.	Typ.	Max.	
BV_{CES}	I_C = 5 mA	V_{BE} = 0	36	---	---	V
BV_{CEO}	I_C = 10 mA	I_B = 0	18	---	---	V
BV_{EBO}	I_E = 1 mA	I_C = 0	4.0	---	---	V
I_{CBO}	V_{CB} = 15.0 V	I_E = 0	---	---	.25	mA
H_{FE}	V_{CE} = 5.0 V	I_C = 50 mA	10	---	100	---

DYNAMIC

Symbol	Test Conditions		Value			Unit
			Min.	Typ.	Max.	
P_{OUT}	f = 175 MHz	V_{CE} = 12.5 V	4.0	---	---	W
G_{PE}	f = 175 MHz	V_{CE} = 12.5 V	12.0	---	---	dB
C_{ob}	f = 1 MHz	V_{CE} = 15.0 V	---	---	20.0	pf


IMPEDANCE DATA

FREQ	Z _{IN} (Ω)	Z _{CL} (Ω)
136 MHz	3.0 – j3.8	12.8 – j11
155 MHz	4.0 – j2.0	11 – j14.8
175 MHz	4.3 – j5.8	13 – j20

P_{IN} = 0.2W
V_{CC} = 12.6V

PACKAGE MECHANICAL DATA

PACKAGE STYLE M246

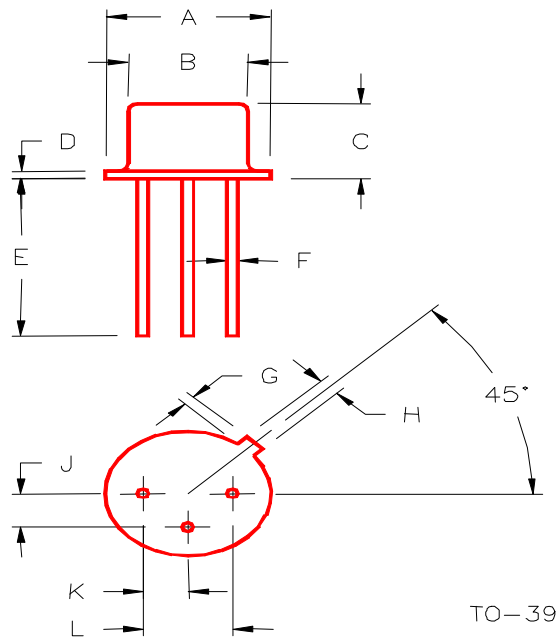

	MINIMUM INCHES/MM	MAXIMUM INCHES/MM		MINIMUM INCHES/MM	MAXIMUM INCHES/MM
A	.350/8,89	.370/9,40	J	.095/2,41	.105/2,67
B	.315/8,00	.335/8,51	K	.095/2,41	.105/2,67
C	.240/6,10	.260/6,60	L	.190/4,83	.210/5,33
D	.015/0,38	.045/1,14			
E	.500/12,70				
F	.016/0,41	.019/0,48			
G	.029/0,74	.040/1,02			
H	.028/0,71	.034/0,86			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Bipolar Transistors](#) category:

Click to view products by [Microsemi](#) manufacturer:

Other Similar products are found below :

[MAPRST0912-50](#) [MCH4016-TL-H](#) [MMBT5551-G](#) [MRF10120](#) [15GN01CA-TB-E](#) [PH1214-25M](#) [MAPRST0912-350](#) [MMBTH10-TP](#) [BFP640F H6327](#) [BFR 360F H6765](#) [MRF10031](#) [NSVF4009SG4T1G](#) [BFP 182R E7764](#) [BFP405H6740XTSA1](#) [MRF10350](#) [ASMA201](#) [BFR360FH6765XTSA1](#) [BFP410H6327XTSA1](#) [BFP620FH7764XTSA1](#) [BFP720ESDH6327XTSA1](#) [BFP720FH6327XTSA1](#) [BFR360L3E6765XTMA1](#) [BFP420H6433XTMA1](#) [BFP420H6740XTSA1](#) [BFP420H6801XTSA1](#) [MCH4015-TL-H](#) [BF888H6327XTSA1](#) [MMBT2222A-G](#) [BFP196WH6327XTSA1](#) [BFP405FH6327XTSA1](#) [BFP640ESDH6327XTSA1](#) [BFR193L3E6327XTMA1](#) [BFS483H6327XTSA1](#) [NSVF4020SG4T1G](#) [NSVF6003SB6T1G](#) [MRF10005](#) [BFP420FH6327XTSA1](#) [BFP740FESDH6327XTSA1](#) [BFR181E6327HTSA1](#) [BFR181WH6327XTSA1](#) [BFR182E6327HTSA1](#) [BFR193E6327HTSA1](#) [BFP181E7764HTSA1](#) [BFP183WH6327XTSA1](#) [BFP720H6327XTSA1](#) [BFR182WH6327XTSA1](#) [BFU590GX](#) [MAPR-000912-500S00](#) [BFR340FH6327XTSA1](#) [STGWT30HP65FB](#)