




Heyco® Nylon PCB Supports - Imperial Spacing

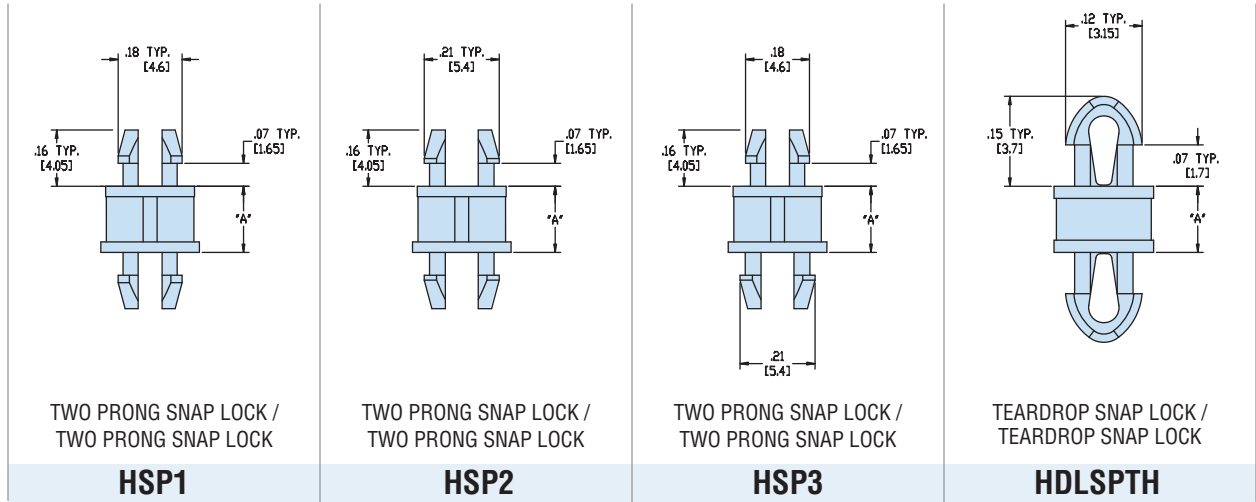

TWO PRONG SNAP LOCK / TWO PRONG SNAP LOCK

TWO PRONG SNAP LOCK / TWO PRONG SNAP LOCK

TWO PRONG SNAP LOCK / TWO PRONG SNAP LOCK

TEARDROP SNAP LOCK / TEARDROP SNAP LOCK

HSP1

HSP2

HSP3

HDLSPTH

| | Maximum Thickness | | Mounting Hole Diameter | | Maximum Thickness | | Mounting Hole Diameter | | Maximum Thickness | | Mounting Hole Diameter | | Maximum Thickness | | Mounting Hole Diameter | |
|----------------|-------------------|-----|------------------------|-----|-------------------|-----|------------------------|-----|-------------------|-----|------------------------|-----|-------------------|-----|------------------------|-----|
| | in. | mm. | in. | mm. | in. | mm. | in. | mm. | in. | mm. | in. | mm. | in. | mm. | in. | mm. |
| PCB | .062 | 1,6 | .157 | 4,0 | .062 | 1,6 | .187 | 4,8 | .062 | 1,6 | .157 | 4,0 | .062 | 1,6 | .098 | 2,5 |
| Chassis | .062 | 1,6 | .157 | 4,0 | .062 | 1,6 | .187 | 4,8 | .062 | 1,6 | .187 | 4,8 | .062 | 1,6 | .098 | 2,5 |

| A | | PART NO. Natural | DESCRIPTION | PART NO. Natural | DESCRIPTION | PART NO. Natural | DESCRIPTION | PART NO. Natural | DESCRIPTION | |
|-------|------|---------------------|-------------|---------------------|-------------|---------------------|-------------|---------------------|--------------|------------|
| in. | mm. | | | | | | | | | |
| .063 | 1,6 | | | | | | | | 10036 | HDLSPTH-01 |
| .125 | 3,2 | | | | | | | | 10037 | HDLSPTH-02 |
| .187 | 4,8 | 10000 | HSP1-03 | 10012 | HSP2-03 | 10024 | HSP3-03 | 10038 | HDLSPTH-03 | |
| .250 | 6,4 | 10001 | HSP1-04 | 10013 | HSP2-04 | 10025 | HSP3-04 | 10039 | HDLSPTH-04 | |
| .312 | 7,9 | 10002 | HSP1-05 | 10014 | HSP2-05 | 10026 | HSP3-05 | 10040 | HDLSPTH-05 | |
| .375 | 9,5 | 10003 | HSP1-06 | 10015 | HSP2-06 | 10027 | HSP3-06 | 10041 | HDLSPTH-06 | |
| .437 | 11,1 | 10004 | HSP1-07 | 10016 | HSP2-07 | 10028 | HSP3-07 | 10042 | HDLSPTH-07 | |
| .500 | 12,7 | 10005 | HSP1-08 | 10017 | HSP2-08 | 10029 | HSP3-08 | 10043 | HDLSPTH-08 | |
| .562 | 14,3 | 10006 | HSP1-09 | 10018 | HSP2-09 | 10030 | HSP3-09 | 10044 | HDLSPTH-09 | |
| .625 | 15,9 | 10007 | HSP1-10 | 10019 | HSP2-10 | 10031 | HSP3-10 | 10045 | HDLSPTH-10 | |
| .750 | 19,1 | 10008 | HSP1-12 | 10020 | HSP2-12 | 10032 | HSP3-12 | | | |
| .875 | 22,2 | 10009 | HSP1-14 | 10021 | HSP2-14 | 10033 | HSP3-14 | 10046 | HDLSPTH-14 | |
| 1.000 | 25,4 | 10010 | HSP1-16 | 10022 | HSP2-16 | 10034 | HSP3-16 | | | |

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix "F" to Part No.

Quick Specs

Material: Nylon 6/6
 Flammability Rating: 94V-2
 Temperature Range: .4°F (-18°C) to 185°F (85°C)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standoffs & Spacers](#) category:

Click to view products by [Martin](#) manufacturer:

Other Similar products are found below :

[M0513-3-N](#) [M0516-3-N](#) [M0517-3-N](#) [M0518-3-N](#) [M0521-3-N](#) [M0524-3-N](#) [M0532-35-AL](#) [M0532-35-N](#) [M0543-4-AL](#) [M0544-35-N](#) [M0544-3-N](#) [M0545-3-AL](#) [M0553-3-N](#) [M0564-4-N](#) [M0608-5-SS](#) [M0609-5-SS](#) [M0610-35-AL](#) [M0613-3-N](#) [M0651-5-SS](#) [M0653-35-N](#) [M0654-4-SS](#) [M0655-5-AL](#) [M0655-5-N](#) [M0660-4-AL](#) [M0660-4-N](#) [M0670-35-N](#) [M0671-5-N](#) [M0671-5-SS](#) [M0722-5-N](#) [M0725-6-N](#) [M0731-4-N](#) [M0904-B-25-AL](#) [M1273-2545-AL](#) [M1273-3005-AL](#) [M1303-3506-AL](#) [M1307-3506-AL](#) [M1313-3005-N](#) [M1313-4007-AL](#) [M1314-3005-AL](#) [M1314-3005-SS](#) [M1315-3005-SS](#) [M1315-4007-N](#) [M1317-3506-AL](#) [M1317-4007-SS](#) [M1318-3005-SS](#) [M1320-3005-AL](#) [M1320-3005-N](#) [M1321-3005-SS](#) [M1321-4007-AL](#) [M1322-4007-N](#)