























Nylon tubing





advantages	applications	connections
semi-rigid - large range of working temperatures and pressures - good chemical resistance - 7 colours - 3 mm to 16 mm tube o.d. 	- pneumatic systems 	LF3000*, LF3600, LF3800 push-in fittings  brass and stainless steel- compression fittings*  adaptors 
multitube semi-rigid/PVC sheath - small bend radius - 6 colours, 2 to 12 tubes 	- pneumatic circuits submitted to external aggression 	multi-connector 
rigid - 1 colour - close tolerance, 4 mm to 10 mm tube o.d. 	- centralised lubrication circuits 	push-in fittings for centralised lubrication 

* ferrules are necessary




Recoil tubing

advantages	applications	connections
nylon with 1/4" BSP taper fitting - the coil will continue to contract after multiple use - fitted with protection springs - 2 colours - 6 mm and 8 mm o.d. 	- pneumatic equipment 	C 9000 and metal quick acting couplers  Blowguns 
polyurethane with 1/4" BSP taper fitting - the coil will continue to contract after multiple use - high flexibility - fitted with protection springs - 3 colours - 4 mm to 12 mm o.d. 		C 9000 and metal quick acting couplers  Blowguns 
polyurethane without connectors - suited to reduced spaces - 1 colour - 8 mm to 12 mm tube o.d. 		push-in fittings with protection springs  C 9000 quick acting couplers 




Braided PVC hose

advantages	applications	connections
 <ul style="list-style-type: none"> - translucent for visual checking of fluid - food quality - 8 mm to 26 mm tube o.d. 	- suitable for use with food and industrial fluids 	adaptors  C 9000 and metal quick acting couplers 
in 25 m rolls: 1025V in 50 m rolls: 1050V		

Self-fastening hose

advantages	applications	connections
 <ul style="list-style-type: none"> - excellent resistance to hydrocarbons, UV, welding sparks and abrasion - simplicity of installation - 4 colours, DN 6 to 20 	- automotive process equipment - cooling circuits - pneumatic installations 	quick-acting barbed fittings 0132, 0133 and 0134 
in 20 m rolls: 1020H in 40 m rolls: 1040H in 80 m rolls: 1080H in 100 m rolls: 1100H		

packaging - Legris tubes and hoses





 <p>Tubepack®, for easy storage - for nylon, polyurethane, FEP 140 and polyethylene tubing</p>	 <p>Drum, 100 m long, for easy handling - for polyurethane tubing</p>	 <p>Drum, up to 1 000 m long, for optimized handling - for nylon, polyurethane and FEP 140 tubing</p>
--	--	---

Polyurethane tubing

advantages	applications	connections
<ul style="list-style-type: none"> - large range of working temperatures and pressures - high flexibility 	- pneumatic systems 	LF3000*, LF3600, LF3800 push-in fittings*  brass and stainless steel compression fittings*  adaptors 
polyester <ul style="list-style-type: none"> - good chemical resistance - good ageing - 6 colours - close tolerance, 3 mm to 14 mm tube o.d. 		
polyether <ul style="list-style-type: none"> - good resistance to humidity and bacteriological aggression - 3 colours - close tolerance, 4 mm to 14 mm tube o.d. 		
twin tubing <ul style="list-style-type: none"> - compact cabling - single or two-coloured (black/blue) - 4 mm to 8 mm tube o.d. 		
anti-static <ul style="list-style-type: none"> - prevents accumulation of electrostatic charges - close tolerance, 3 mm to 12 mm tube o.d. 	- electronic environments 	
in 25 m rolls: 1025U in 100 m rolls: 1100U		
in 25 m rolls: 1025U...R in 100 m rolls: 1100U...R		
in 25 m rolls: 1420U		
in 100 m rolls: 1100U...A		




* ferrules are necessary

Fluoropolymer FEP 140 tube








advantages	applications	connections
 <ul style="list-style-type: none"> - excellent resistance to chemicals and high temperature - food quality - close tolerance, 4 mm to 12 mm tube o.d. 	- food and industrial applications 	LF3600, LF3800 push-in fittings*  stainless steel compression fittings* 
in 5 m rolls: 1005T in 25 m rolls: 1025T		

* ferrules are necessary

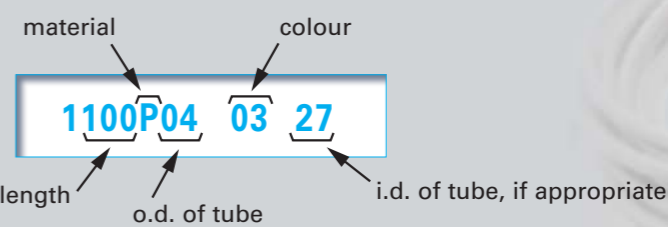
Polyethylene

advantages	applications	connections
 <ul style="list-style-type: none"> - resistance to chemicals - food quality - economical solution - close tolerance, from 1/8" to 1/2" and 4 mm to 14 mm tube o.d. 	- food and industrial applications 	LF3600 push-in fittings 
in 5 m rolls: 1025Y in 25 m rolls: 1100Y		

Anti-spark tubing

advantages	applications	connections
<ul style="list-style-type: none"> - conforms to UL94 VO standard - excellent resistance to spark projections 	- installations submitted to aggressive environments and spark projections 	
anti-spark nylon tubing <ul style="list-style-type: none"> - resistant to high pressure - from 6 mm to 12 mm tube o.d. 		LF6000 push-in fittings 
in 25 m rolls: 1025P...V in 100 m rolls: 1100P...V		
anti-spark polyurethane tubing <ul style="list-style-type: none"> - resistant to high pressure - from 6 mm to 12 mm tube o.d. 		LF6000 push-in fittings 
in 25 m rolls: 1025U...V in 100 m rolls: 1100U...V		
anti-spark single layer polyurethane tubing <ul style="list-style-type: none"> - excellent humidity resistance - from 4 mm to 12 mm tube o.d. 		LF3600 push-in fittings 
in 25 m rolls: 1025U...K in 100 m rolls: 1100U...K		

Product codes of Legris tubes and hoses

 <p>material: 1100P04 colour: 03 length: 27 o.d. of tube: 03 i.d. of tube, if appropriate: 27</p>	<p>tube o.d.: corresponds to the outside diameter of the tube tube i.d.: 27 = 2,7 mm</p>	<p>material code: P= nylon T= FEP 140 U= polyurethane V= PVC Y= polyethylene</p>									
<p>colour code:</p> <table border="0"> <tr> <td>00 = </td> <td>03 = </td> <td>06 = </td> </tr> <tr> <td>01 = </td> <td>04 = </td> <td>07 = </td> </tr> <tr> <td>02 = </td> <td>05 = </td> <td>08 = </td> </tr> </table>	00 =	03 =	06 =	01 =	04 =	07 =	02 =	05 =	08 =		
00 =	03 =	06 =									
01 =	04 =	07 =									
02 =	05 =	08 =									

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [legris manufacturer](#):

Other Similar products are found below :

[0670 00 21](#) [3199 06 21](#) [3166 04 08](#) [0931 08 13](#) [1025P06 02](#) [1025U06 03](#) [3199 06 10](#) [1025U06 01](#) [1025U08 01](#) [7910 10 00](#) [7770 04 00](#)
[1025P08 05](#) [3166 04 10](#) [3104 04 00](#) [3102 10 00](#) [1025P06 05](#) [1025U04 04](#) [7770 06 00](#) [3106 04 00](#) [3101 08 17](#) [3166 06 08](#) [1005T06 00](#) [0915](#)
[00 13](#) [1025U08 04](#) [3140 06 00](#) [9094U06 08](#) [0931 10 13](#) [0931 06 13](#) [3000 71 00](#) [0902 00 10](#) [1025U06 04](#) [7910 08 00](#) [3106 06 08](#) [0673 00 13](#)
[3199 06 13](#) [3106 06 10](#) [0931 07 13](#) [3106 06 00](#) [7910 06 00](#) [3199 08 13](#) [3199 06 19](#) [3102 06 00](#) [3101 06 13](#) [0931 07 10](#) [3101 06 10](#) [3104 08](#)
[00](#) [3101 04 19](#) [3104 06 00](#) [3126 08 00](#)