

## **Penta Band External Antenna**

- GSM Antenna Penta Band
- Weather Proof
- External
- 2 dBi Gain


ADA-0169 is a Quad band GSM antenna with SMA connector, delivered with 5m RG58 low loss cable. Suitable for fixed wireless communication devices in remote areas. Omniradiant performance.



### Specification

Antenna	Specification	
Frequency	800/900/1800/1900 & 2100MHz	
Polarization	Vertical	
V.S.W.R	<2.0:1	
Impedance	50Ω	
Return Loss	See Diagram	
	Environmental Conditions	
Operating Temperature	-40°C ~ + 80°C	
Storage Temperature	-40°C ~ + 80°C	
Relative Humidity	40% to 95%	
	Mechanical Specification	
Antenna Color	Black	
Cable	RG58 Low Loss, 5m, other cables on request.	
Connector	SMA (M), other connectors on request.	
Size	267mm	
Weight	245g Max.	
Mounting	Bracket with Screws	

#### **Return Loss & SWR**

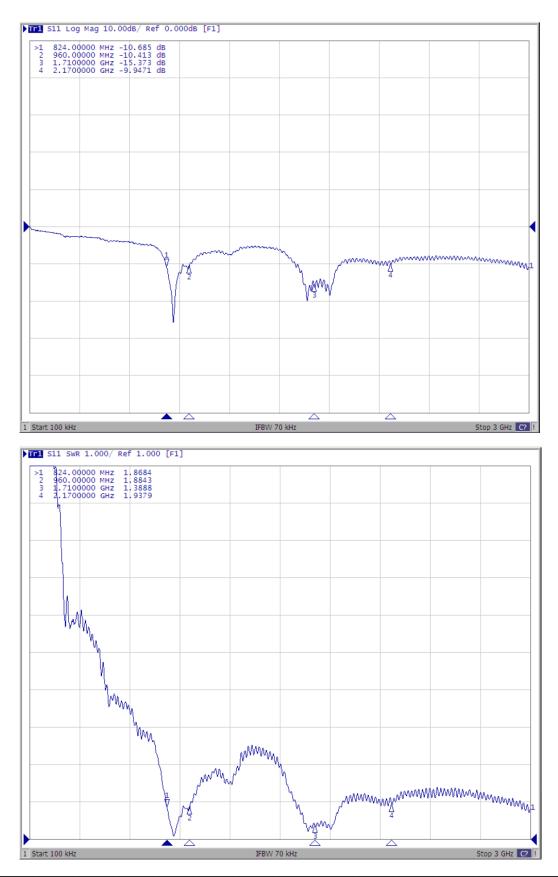

#### Ordering codes

TYPE	Description	Comment
ADA-0169	External GSM Antenna	Quad Band Antenna

# For the latest updates, visit our Web site: *www.adactus.se* **Disclaimer**

Information furnished is believed to be accurate and reliable. However, Adactus assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. Adactus reserves the right to make changes without further notice to any product herein to improve reliability, function or design. Adactus does not assume any liability arising out of the application or use of any product described herein.

This publication supersedes and replaces all information previously supplied. Adactus products are not authorised as critical components in life support devices or systems.

### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for adactus manufacturer:

Other Similar products are found below :

ADA-76 ADA WLAN 25254 ADA-0087QU-I ADA-0087QU-L ADA-A101-S ADA 0068QUW ADA-0086QU-I ADA0040 ADA-0186QU ADA 0186 433 ADA-0062Q/U-SMA ADA-25252