





MS3V-T1R

Tuning Fork Crystal 30 kHz – 200 kHz



RoHS - compliant

DIMENSIONS

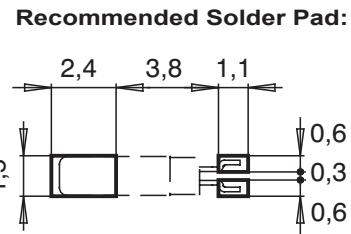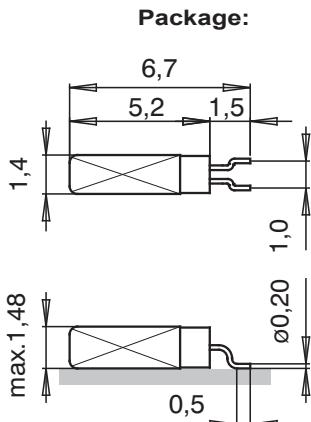

All dimensions in mm typical

Miniature SMT package
Package height 1.48 mm max.
Compatible solder pad layout with plastic molded crystal packages
Industrial temperature range
Very price competitive
Low aging
Low power consumption
High shock and vibration resistance

DESCRIPTION:

The MS3V-T1R is a miniature square-bodied 1.4 x 6.7 x 1.4 mm metal package with formed leads, intended for surface mounting and reflow soldering.

Within the package is a high-quality tuning fork quartz crystal resonator, manufactured with a precision high-volume photolithographic process and operating in the fundamental mode.

Due to highly automated, large-volume production, the MS3V-T1R is very price competitive and ideal for any consumer and industrial applications.

For pick-and-place equipment, the crystals are supplied in 16 mm tape:
 7" (178 mm) reel with 2'000 crystals
 13" (330 mm) reel with 9'000 crystals

ELECTRICAL CHARACTERISTICS AT 25°C:

| Frequency Range | F _L | 30–200 | | kHz |
|-----------------------------------|----------------|------------------|--|-----|
| Load capacitance ¹⁾ | C _L | 7.0 / 9.0 / 12.5 | | pF |
| Frequency tolerance ²⁾ | ΔF/F | +/-20 | | ppm |
| | ΔF/F | +/-100 | | ppm |
| Drive level max. | P | 1.0 | | μW |
| Insulation resistance min. | R _i | 500 | | MΩ |
| Aging first year max. | ΔF/F | +/-3 | | ppm |

| Frequency Example ³⁾ | F _L | 32.768 | 75.000 | 76.800 | kHz |
|---------------------------------|-------------------|----------------------------|------------------------------------|---------|-----|
| Series resistance typ./max. | R _S | 50 / 65 | 19 / 30 | 18 / 30 | kΩ |
| Motional capacitance typ. | C ₁ | 2.1 | 1.45 | 1.35 | fF |
| Static capacitance typ. | C ₀ | 0.9 | 0.9 | 0.9 | pF |
| Turnover temperature | T ₀ | 25 +/-5 | 22 +/-5 | 22 +/-5 | °C |
| Frequency vs. temperature | ΔF/F ₀ | -0.035 ppm/°C ² | (T - T ₀) ² | +/-10% | ppm |

1) For standard and other load capacitances consult factory.

2) Tighter and wider frequency tolerances on request.

3) Values for other frequencies consult factory.

STANDARD FREQUENCIES:

| Frequency kHz | | | | |
|------------------------------|--------|--------|--------|--------|
| 32.768 | 38.400 | 75.000 | 76.800 | 77.500 |
| Other frequencies on request | | | | |

ENVIRONMENTAL CHARACTERISTICS:

| | | Conditions | Max. Dev. |
|--------------------------------|------|------------------------|------------------|
| Storage temperature range | | –55 to +85°C | |
| TA Operating temperature range | | –40 to +85°C | |
| Shock resistance | ΔF/F | 5000 g, 0.3 ms, ½ sine | +/-5 ppm |
| Vibration resistance | ΔF/F | 20 g / 10–2000 Hz | +/-5 ppm |

TERMINATIONS AND PROCESSING:

| Type | Termination | Processing |
|----------|---|---|
| MS3V-T1R | Can: Pd plated Leads: Formed leads Au flashed | For SMD mounting Reflow soldering 260°C / 20 sec. max |

PRODUCT DESCRIPTION AND ORDERING INFORMATION:

| | | | | | |
|--|------------------|-----------------------------|-----------------|-----------|-----------|
| MS3V-T1R | <u>32.768kHz</u> | <u>12.5pF</u> | <u>+/-20ppm</u> | <u>TA</u> | <u>QC</u> |
| <u>Frequency F_L</u> | | | | | |
| <u>C_L Load Capacitance</u> | | | | | |
| 7.0 pF | | | | | |
| 9.0 pF | | | | | |
| 12.5 pF | | | | | |
| <u>Frequency tolerance</u> | | | | | |
| +/- 20 ppm | | | | | |
| +/- 100 ppm | | | | | |
| | | <u>Temperature Range</u> | | | |
| | | TA = -40 to 85°C (Standard) | | | |
| Optional: if not defined, 'Standard' will apply | | <u>Qualification</u> | | | |
| | | QC = Commercial (Standard) | | | |
| A unique part number will be generated for each product specification, i.e: 20xxxx-ML02 2'000 pcs (in 16mm tape on 7" reel) 20xxxx-PL09 9'000 pcs (in 16mm tape on 13" reel) Please contact us. | | | | | |

All specifications subject to change without notice.



Micro Crystal AG
Mühlestrasse 14
CH-2540 Grenchen
Switzerland

Tel. +41 32 655 82 82
Fax +41 32 655 82 83
sales@microcrystal.com
www.microcrystal.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for micro crystal manufacturer:

Other Similar products are found below :

[RV-8523-C3-EVALUATION-BOARD](#) [RV-3028-C7 ON BOARD 32.768kHz TA QC](#) [RV-3049-C2-EVALUATION-BOARD-OPTION-B](#) [RV-3029-C2-EVALUATION-BOARD-OPTION-B](#) [RV-8803-C7-32.768k-3PPM-TA-QA](#) [RV-8803-C7-EVALUATION-BOARD](#) [OV-7604-C7-EVALUATION-BOARD](#) [RV-8263-C7-EVALUATION-BOARD](#) [CM7V-T1A-32.768kHz-9pF-20PPM-TC-QC](#) [RV-2251-C3-EVALUATION-BOARD](#) [RV-3029-C3-32.768k-OPTION-B-TB-QA](#) [RV-3029-C3-TB-QA-OPT.B](#) [CC4V-T1A-32.768kHz-9pF-20PPM-TA-QC](#) [RV-2123-C2-TA-QC-020](#) [CC4V-T1A 32.768KHZ +-20PPM 9PF](#) [MS1V-T1K-32.768kHz-7pF-20PPM-TA-QC-Au](#) [CC7V-T1A-32.768k-12.5pF-20PPM-TA-QA](#) [CC4V-T1A 32.768KHZ 12.5PF +-20PPM](#) [CM7V-T1A-32.768k-6pF-20PPM-TB-QA](#) [RV-3029-C2-TB-QA-OPT.A](#) [OM-0100-C8-100.00kHz-20PPM-TA-QC](#) [CM7V-T1A-32.768k-9pF-20PPM-TA-QA](#) [CM8V-T1A-32.768kHz-7pF-20PPM-TB-QC](#) [RV-3049-C3-TB-QA-OPT.A](#) [CC5V-T1A 32.768KHZ +-20PPM 9PF](#) [RV-8564-C3-TA-QC-020](#) [MS1V-T1K 32.768KHZ +-20PPM 10PF](#) [CC7V-T1A-32.768k-9pF-20PPM-TC-QA](#) [CM7V-T1A-32.768kHz-12.5pF-100PPM-TC-QC](#) [RV-3029-C3-32.768k-OPTION-A-TB-QA](#) [CM7V-T1A-32.768k-9pF-20PPM-TC-QA](#) [CC7V-T1A-32.768kHz-7pF-20PPM-TB-QC](#) [CM7V-T1A-100.000kHz-9pF-100PPM-TA-QC](#) [RV-4162-C7-TA-QC-020](#) [CC7V-T1A-32.768k-9pF-20PPM-TA-QA](#) [RV-3029-C2-32.768k-OPTION-A-TB-QA](#) [RV-3049-C3-32.768kHz-OPTION-B-TA-QC](#) [RV-8564-C2-32.768kHz-20PPM-TA-QC](#) [CC7V-T1A-32.768kHz-7pF-10PPM-TA-QC](#) [CM7V-T1A-32.768k-9pF-20PPM-TB-QA](#) [OM-7605-C8-20PPM-TA-QA](#) [CC7V-T1A-32.768k-12.5pF-20PPM-TB-QA](#) [CC7V-T1A-32.768kHz-12.5pF-10PPM-TA-QC](#) [OV-7604-C7](#) [RV-3149-C3 32.768kHz OPTION B TA QC](#) [RV-3049-C3-32.768k-OPTION-B-TB-QA](#) [CC4V-T1A-32.768kHz-7pF-20PPM-TA-QC](#) [CM9V-T1A-32.768kHz-7pF-100PPM-TA-QC](#) [CM7V-T1A-32.768k-7pF-100PPM-TB-QA](#) [CM7V-T1A-0.3-32.768kHz-9pF-20PPM-TA-QC](#)