



Coaxial Cable

141SMR Model Series

50Ω DC to 18 GHz



CASE STYLE: KQ1632-XX

XX= cable length in inches

The Big Deal

- Hand Formable
- Tight Bend Radius
- Right Angle SMA Connectors
- Ideal for interconnect of assembled systems

Product Overview

The 141 Series Hand-Flex Coaxial Cables are ideal for interconnection of coaxial components or sub-systems. The construction includes a silver-plated copper-clad steel center conductor which maintains the shape after bending. The outer shield is copper braid, tin soaked, which minimizes signal leakage and at the same time flexible for easy bend. Dielectric is low loss PTFE. Connectors have passivated stainless-steel coupling nut over a gold plated connector body and gold plated, brass center conductor.

Key Features

| Feature | Advantages |
|--|--|
| Hand-Formable RF Cables | The 141 Series Hand-Flex cables are hand formable making them ideal for use integrating coaxial components and sub-assemblies without the need for special cable-bending tools and alleviating the risk of damage during the bending process typical of semi-rigid coaxial cable assemblies. |
| Tight Bend Radius | Capable of only 8mm bend radius, the 141 Hand Flex series is able to make connections in tight spaces making these cables ideal for dense system integration |
| Excellent Return loss | Supporting typical return loss of 33 dB to 6 GHz and 21 dB to 18 GHz, the 141 Series Hand-Flex Cables are ideally suited for interconnecting a wide variety of RF components while minimizing VSWR ripple contribution due to mating cables & connectors. |
| Good Power Handling Capability: <ul style="list-style-type: none"> • 546W at 0.5 GHz • 90W at 18 GHz | Mini-Circuits 141 Series can support medium to high RF power levels enabling these cables to be used in the transmit path. NOTE: power rating is at sea-level altitudes. |
| Built in Anti-torque nut | Mini-Circuits' 141 Series Hand Flex cables include an anti-torque feature to support the connector body during installation alleviating risk of stress to the connector/cable interface. |
| Jacketed | Standard 141 Series cables include a blue FEP insulator jacket reducing the risk of accidental shorting of DC power lines or active pins during installation and operation. |
| Right angle SMA connectors | Avoids multiple right angle bends and improves reliability. |

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp





Coaxial Cable

50Ω 4 inch DC to 18 GHz

141-4SMR+



CASE STYLE: KQ1632-4

| Connectors | Model |
|----------------------|-----------|
| Right Angle SMA-Male | 141-4SMR+ |

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

| | | |
|-------------------------|----------------|------------|
| Operating Temperature | -55°C to 105°C | |
| Storage Temperature | -55°C to 105°C | |
| Power Handling at 25°C, | 546W | at 0.5 GHz |
| Sea Level | 387W | at 1 GHz |
| | 273W | at 2 GHz |
| | 156W | at 6 GHz |
| | 121W | at 10 GHz |
| | 90W | at 18 GHz |

Permanent damage may occur if any of these limits are exceeded.

Features

- Wideband frequency coverage, DC to 18 GHz
- Low Loss, 0.39 dB at 18 GHz
- Excellent Return Loss, 18 dB at 18 GHz
- Hand formable to almost any custom shape without special bending tools
- 8mm bend radius for tight installations
- Anti-torque nut prevents cable stress during installation
- Insulated outer jacket standard
- **Ideal for interconnect of assembled systems**

Applications


- Replacement for custom bent 0.141" semi-rigid cables
- Communication receivers and transmitters
- Military and aerospace system
- Environmental and test chambers

Electrical Specifications at 25°C

| Parameter | Condition (GHz) | Min. | Typ. | Max. | Unit |
|---------------------|-----------------|------|------|------|--------|
| Frequency Range | | DC | | 18 | GHz |
| Length ¹ | | | 4 | | inches |
| Insertion Loss | DC - 2 | — | 0.05 | 0.3 | dB |
| | 2 - 6 | — | 0.09 | 0.53 | |
| | 6 - 10 | — | 0.18 | 0.70 | |
| | 10 - 18 | — | 0.31 | 0.95 | |
| Return Loss | DC - 2 | 20 | 29 | — | dB |
| | 2 - 6 | 20 | 26 | — | |
| | 6 - 10 | 16 | 21 | — | |
| | 10 - 18 | 16 | 18 | — | |

1. Custom sizes available, consult factory.


Outline Drawing

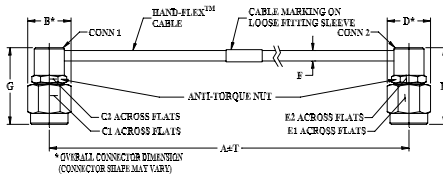

Outline Dimensions (inch/mm)



| | | | | | |
|--------|-----------|----------|------|-------|------|
| A | B | C1 | C2 | D | E1 |
| 4.0 | .36 | .313 | .250 | .36 | .313 |
| 101.60 | 9.14 | 7.95 | 6.35 | 9.14 | 7.95 |
| E2 | F | G, H | T | wt | |
| .250 | .163±.004 | .728±.02 | .05 | grams | |
| 6.35 | 4.14±0.10 | 18.5±0.5 | 1.27 | 10.37 | |

Cable Construction

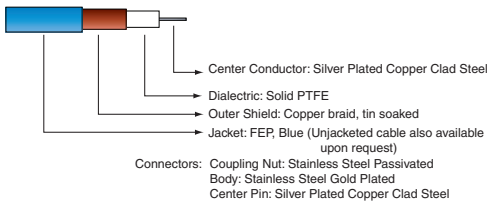

Typical Performance Data

| Frequency (MHz) | Insertion Loss (dB) | Return Loss (dB) | |
|-----------------|---------------------|----------------------|----------------------|
| | | Right Angle SMA-Male | Right Angle SMA-Male |
| 100 | 0.00 | 41.9 | 44.1 |
| 1000 | 0.03 | 42.4 | 46.8 |
| 1800 | 0.04 | 35.7 | 36.5 |
| 2404 | 0.05 | 28.2 | 27.6 |
| 4001 | 0.07 | 30.8 | 30.3 |
| 5000 | 0.07 | 43.0 | 57.2 |
| 6000 | 0.08 | 43.8 | 41.0 |
| 7001 | 0.10 | 50.5 | 38.5 |
| 8001 | 0.10 | 60.3 | 38.0 |
| 9000 | 0.13 | 30.9 | 33.6 |
| 10000 | 0.12 | 28.7 | 27.2 |
| 12001 | 0.16 | 24.7 | 24.9 |
| 14001 | 0.18 | 29.6 | 44.8 |
| 17069 | 0.24 | 33.7 | 31.5 |
| 18000 | 0.28 | 28.2 | 31.6 |

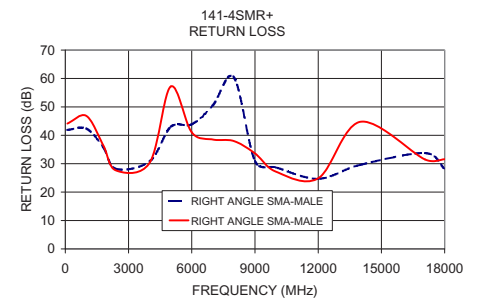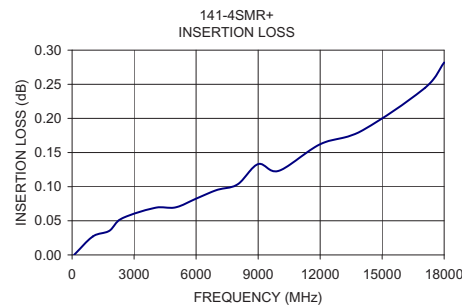

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/WCLStore/terms.jsp



Typical Performance Data




| FREQUENCY (MHz) | INSERTION LOSS (dB) | RIGHT ANGLE SMA-MALE 1 RETURN LOSS (dB) | RIGHT ANGLE SMA-MALE 2 RETURN LOSS (dB) |
|--------------------|---------------------------|--|--|
| 100.0 | 0.00 | 41.9 | 44.1 |
| 200.0 | 0.01 | 37.2 | 38.2 |
| 300.0 | 0.01 | 34.0 | 34.5 |
| 400.0 | 0.02 | 32.0 | 33.1 |
| 500.0 | 0.02 | 31.5 | 32.8 |
| 600.0 | 0.02 | 32.3 | 32.5 |
| 700.0 | 0.03 | 33.2 | 33.9 |
| 800.0 | 0.03 | 38.8 | 39.3 |
| 900.0 | 0.03 | 43.7 | 46.4 |
| 1000.0 | 0.03 | 42.4 | 46.8 |
| 1100.0 | 0.03 | 34.2 | 35.5 |
| 1250.0 | 0.03 | 31.1 | 31.9 |
| 1500.0 | 0.04 | 35.2 | 35.3 |
| 1750.0 | 0.03 | 42.6 | 51.4 |
| 2000.0 | 0.05 | 29.6 | 29.7 |
| 2250.0 | 0.05 | 26.7 | 26.4 |
| 2500.0 | 0.05 | 31.7 | 31.0 |
| 2750.0 | 0.05 | 40.7 | 39.4 |
| 3000.0 | 0.05 | 35.8 | 34.1 |
| 3250.0 | 0.05 | 38.4 | 34.7 |
| 3500.0 | 0.06 | 40.5 | 43.8 |
| 3750.0 | 0.06 | 31.9 | 31.3 |
| 4000.0 | 0.07 | 31.5 | 31.2 |
| 4250.0 | 0.06 | 42.7 | 42.9 |
| 4500.0 | 0.06 | 51.8 | 43.6 |
| 5000.0 | 0.07 | 44.4 | 52.4 |
| 5500.0 | 0.08 | 32.7 | 31.6 |
| 6000.0 | 0.08 | 43.8 | 41.0 |
| 6500.0 | 0.10 | 29.3 | 29.2 |
| 7000.0 | 0.10 | 42.3 | 36.6 |
| 7500.0 | 0.11 | 26.7 | 26.1 |
| 8000.0 | 0.10 | 49.3 | 40.8 |
| 8500.0 | 0.12 | 25.2 | 24.8 |
| 9000.0 | 0.13 | 31.2 | 34.5 |
| 9500.0 | 0.15 | 25.1 | 25.5 |
| 10000.0 | 0.12 | 28.7 | 27.2 |
| 10500.0 | 0.14 | 26.3 | 26.6 |
| 11000.0 | 0.13 | 27.5 | 26.3 |
| 11500.0 | 0.13 | 28.7 | 31.6 |
| 12000.0 | 0.17 | 24.8 | 25.0 |
| 12500.0 | 0.16 | 28.7 | 33.1 |
| 13000.0 | 0.17 | 25.4 | 28.9 |
| 13500.0 | 0.18 | 30.0 | 35.0 |
| 14000.0 | 0.18 | 30.9 | 34.2 |
| 14500.0 | 0.20 | 33.5 | 43.1 |
| 15000.0 | 0.21 | 39.4 | 32.8 |
| 15500.0 | 0.22 | 30.1 | 32.5 |
| 16000.0 | 0.24 | 34.8 | 37.0 |
| 16500.0 | 0.24 | 28.0 | 35.8 |
| 17000.0 | 0.24 | 29.1 | 26.1 |
| 17500.0 | 0.30 | 22.9 | 24.3 |
| 18000.0 | 0.28 | 28.2 | 31.6 |

Hand-Flex Coaxial Cable

141-4SMR+

Right Angle SMA-Male to Right Angle SMA-Male

Typical Performance Curves

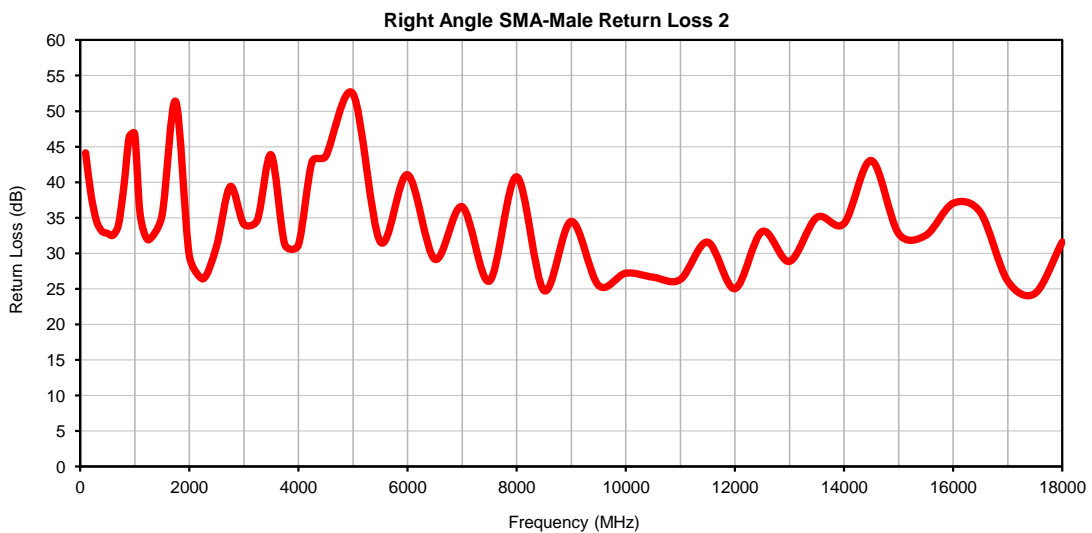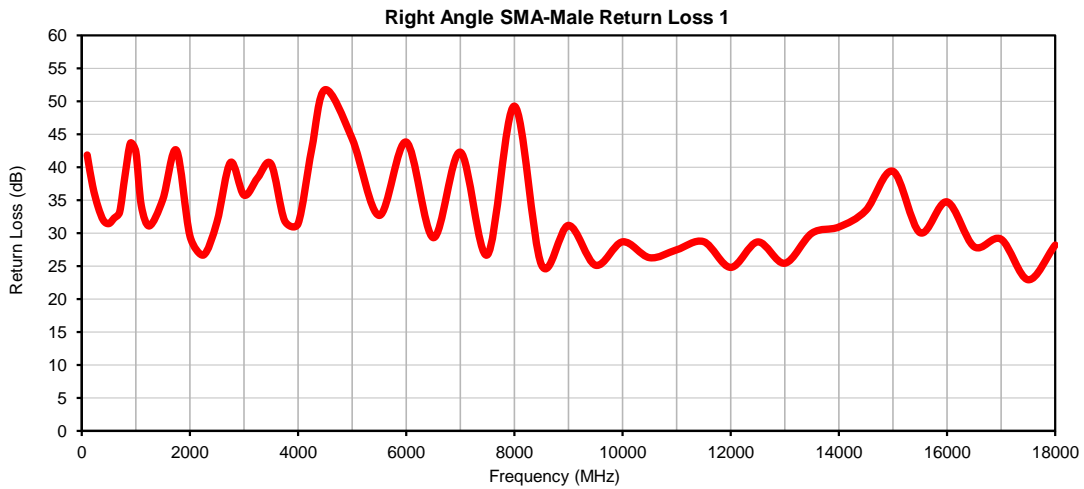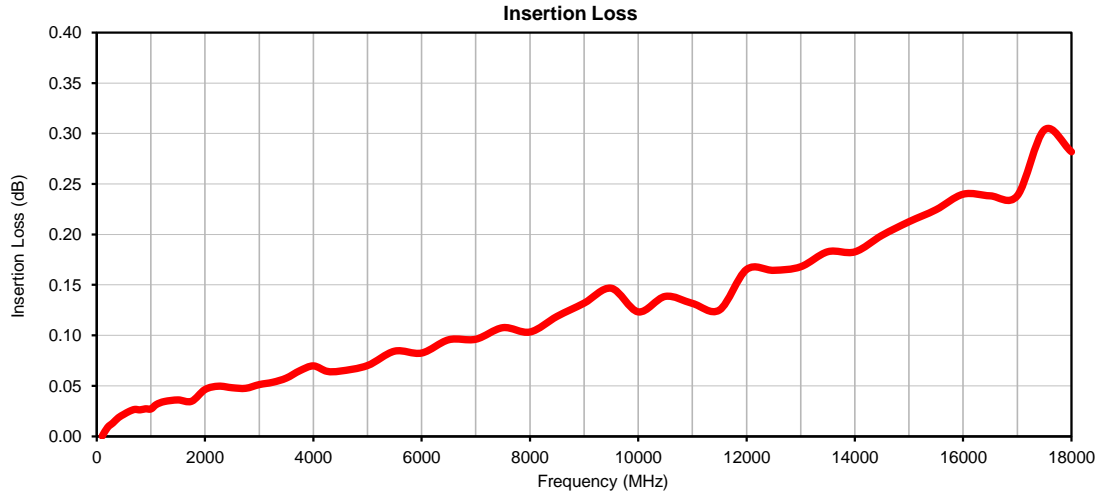

P.O. Box 350166, Brooklyn, New York 11235-0003 • (718) 934-4500 • Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site




The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

REV. OR
141-4SMR+
7/26/2013
Page 1 of 1

Outline Dimensions

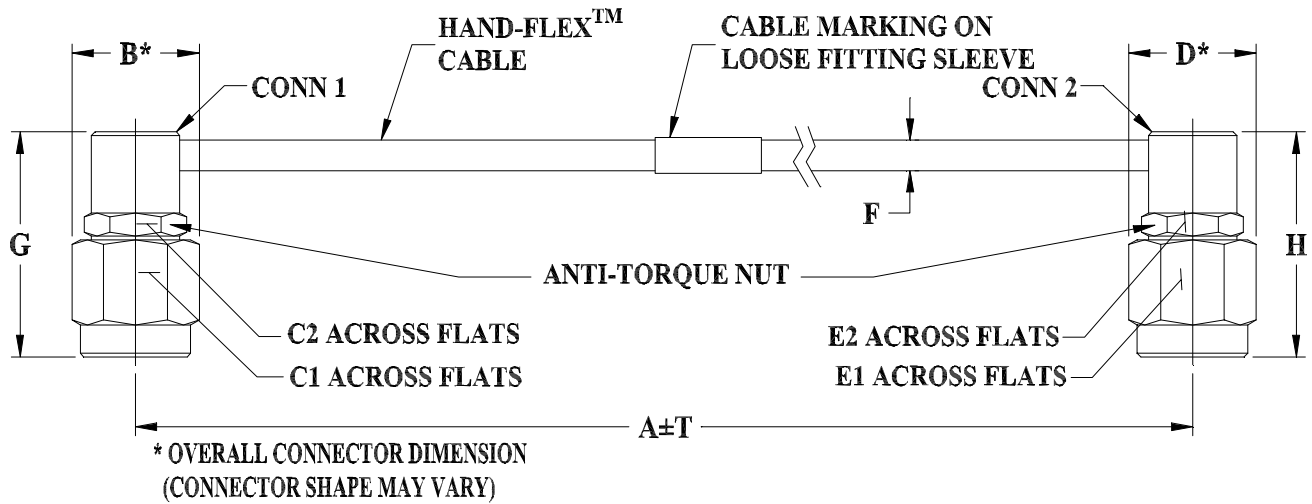

KQ1632 SERIES

RIGHT ANGLE SMA MALE (CONN-1)

RIGHT ANGLE SMA MALE (CONN-2)

| CASE STYLE # | A | | B | C1 | C2 | D | E1 | E2 | F | | G | H | T | | WEIGHT GRAMS |
|--------------|-------|--------|---------------|----------------|----------------|---------------|----------------|----------------|------------------------------|------------------------------|-------------------------------|-------------------------------|------|------|--------------|
| | INCH | MM | | | | | | | 141U-ASMR+ | 141-ASMR+ | | | INCH | MM | |
| KQ1632-4 | 4.00 | 101.60 | .36 (9.14) | .313 (7.95) | .250 (6.35) | .36 (9.14) | .313 (7.95) | .250 (6.35) | .141 ± .003 (3.58 ± 0.07) | .163 ± .004 (4.14 ± 0.10) | .728 ± .020 (18.50 ± 0.50) | .728 ± .020 (18.50 ± 0.50) | .05 | 1.27 | 10.37 |
| KQ1632-5 | 5.00 | 127.00 | | | | | | | | | | | .05 | 1.27 | 11.52 |
| KQ1632-6 | 6.00 | 152.40 | | | | | | | | | | | .05 | 1.27 | 12.66 |
| KQ1632-7 | 7.00 | 177.80 | | | | | | | | | | | .10 | 2.54 | 13.80 |
| KQ1632-8 | 8.00 | 203.20 | | | | | | | | | | | .10 | 2.54 | 14.94 |
| KQ1632-9 | 9.00 | 228.60 | | | | | | | | | | | .10 | 2.54 | 16.09 |
| KQ1632-12 | 12.00 | 304.80 | | | | | | | | | | | .10 | 2.54 | 19.52 |

Unless otherwise specified dimensions are in inches (mm).

Tolerances: 2Pl. ± .03; 3Pl. ± .015

Note:

1. 141 Hand-Flex™ Coaxial Cable.
2. "A" represents length of cable.



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications for any or all of the following physical and environmental test.

| Specification | Test/Inspection Condition | Reference |
|-----------------------|--|---------------------------|
| Operating Temperature | -55° to 105° C or -55° to 85° C (see datasheet) Ambient Environment | Individual Model Data |
| Storage Temperature | -55° to 105° C or -55° to 85° C (see data sheet) Ambient Environment | Individual Model Data |
| Thermal Shock | -55° to 100°C, 100 Cycles | MIL-STD-202F; Method 2003 |
| Multiple Bend Radius | 40 mm, 5 times for 141 series cables 30 mm, 5 times for 086 series cables | |
| Single Bend Radius | 8 mm for 141 series cables 6 mm for 086 series cables | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [Mini-Circuits](#) manufacturer:

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [73-6364-6](#) [R285001001](#) [R288940004](#) [R288940005](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#) [24P104C24P1-006](#) [24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-50](#) [24P103C24P2-003](#) [25P203C25P2-003](#) [PTWY-24-78](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [R288940008](#) [RF179-74BJ3-77RP1-0305](#) [4814-BB-24](#) [5260-72](#) [JT2N1-CL1-1F](#) [DLP-COAX1](#) [4814-K-48](#) [115101-09-06.00](#) [CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-6353-25](#) [1800920920610PJ](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#) [TL8A-11SMA-11SMA-01500-51](#) [R284C0351060](#) [R288940009](#) [R284C0351028](#) [R288940002](#) [9702-1SL-1](#) [PT82NSMA](#) [73-6353-10](#) [R285020301W](#)