


Thermal Silicone Film MSF-15 Series

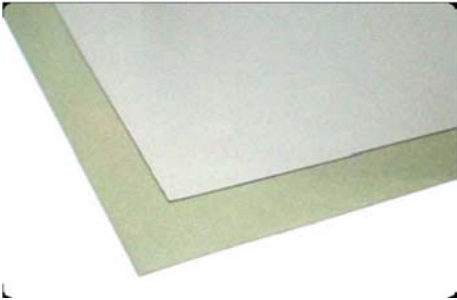

AMEC Thermasol MSF-15 series is an extremely thin thermally conductive ceramic filled Silicone. It is electrically insulating, and with fibreglass reinforcement it provides excellent mechanical strength. Can be supplied in sheets, rolls or die cut parts

Features

- Extremely thin 0.1~0.25mmmm
- 1.5W/mk thermal conductivity
- Fibreglass reinforcement provides excellent mechanical strength for easy handling
- Very high dielectric Strength
- Good chemical resistance

Applications

- Power modules
- AC/DC converters
- Power Diodes
- MOSFETS
- PSU's

tem	Unit	Value	Standard
Thermal Conductivity	W/mK	1.5	ASTM D5470
Thermal Impedance	°C.in ² /W	0.1mm – 0.16 0.18mm – 0.33 0.25mm – 0.39.	ASTM D5470
Thickness	mm	0.1, 0.18, 0.25	-
Hardness	Shore 00	45, 60, 70	ASTM D2240
Reinforcement	-	Fibreglass	-
Breakdown Voltage	kV	>5	ASTM D149
Volume Resistance	Ω.cm	3.4x10 ¹¹	ASTM DE257
Flammability rating	-	94 V-0	UL
Operating Temperature	°C	-40~150	-
ROHS	-	Non detected	-

Part number system:

Series – Thermal Conductivity/Shore Harness-Sheet size

E.g.: MSF-1545-300x250x0.1

AMEC Thermasol

1-2 Steam Mill Lane, Great Yarmouth, Norfolk, NR31 0HP

Telephone: +44(0) 1493 668622 Fax: +44(0) 1493 668623

Email: sales@amecthermasol.co.uk Website: www.amecthermasol.co.uk

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [amec thermasol](#) manufacturer:

Other Similar products are found below :

[W8TR500G-2.0](#) [SFT80-0.15](#) [FCTL73-15](#) [FCTS73-10N](#) [MPC303025T](#) [W8TR500G-0.5GF](#) [MHP-2550A-250A](#) [MPC101020T](#) [MPC202025T](#)
[FCH30305T](#) [MPC151525T](#)