

Coaxial

Adapter 3.5 mm-M to 3.5 mm-M

35M-35M50+

50Ω DC to 34 GHz

The Big Deal

- Ultra-wideband, DC-34 GHz
- Flat response
- Low insertion loss, 0.10 dB
- Excellent VSWR, 1.03:1



CASE STYLE: DJ1863

Product Overview

Mini-Circuits' 35M-35M50+ is a coaxial 3.5mm-M to 3.5mm-M adapter supporting a wide range of applications from DC to 34 GHz. This model provides excellent VSWR, low insertion loss, and flat response versus frequency. The 35M-35M50+ features rugged, passivated stainless steel construction and measures only 0.86" (l) x 0.36" (dia.).

Key Features

Feature	Advantages
Wideband, DC to 34 GHz	Wide frequency range provides application flexibility and makes this model ideal for broad-band and multi-band use.
Excellent VSWR, 1.03:1	Provides good matching for 50Ω systems and minimizes signal reflections across wide frequency range.
Low insertion loss, 0.10 dB	Provides excellent signal power transmission from input to output.
Rugged, passivated stainless steel construction.	Stands up to wear and tear in demanding environments and provides excellent reliability.
Very wide operating temperature range, -55 to +100°C	Withstands extreme operating conditions and is suitable for use near high power components where heat rise is common.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Coaxial Adapter 3.5 mm-M to 3.5mm-M

50Ω DC to 34 GHz

35M-35M50+



Generic photo used for illustration purposes only

CASE STYLE: DJ1863

Connectors	Model
3.5mm-Male	35M-35M50+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.

Features

- flat response
- excellent VSWR, 1.02 typ. up to 18 GHz and 1.03 typ. up to 34 GHz
- low cost adapters, available from stock
- rugged stainless steel body, passivated
- qualified to 500 mating cycles
- 3.5mm connector mates with SMA,K,2.92mm connectors


Applications

- interconnection of RF cable and equipment

Electrical Specifications at 25°C

Parameter	Condition (GHz)	Min.	Typ.	Max.	Units
Frequency Range		DC		34	GHz
Insertion Loss	DC - 34	—	0.10	—	dB
	DC - 18	—	1.02	1.25	
VSWR	DC - 26	—	1.02	1.25	:1
	DC - 34	—	1.03	1.25	

Outline Drawing


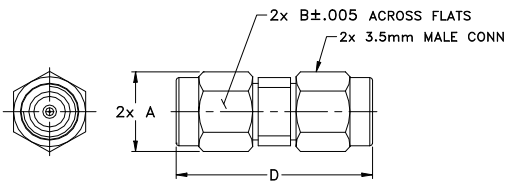


Outline Dimensions (inch/mm)

A	B	C	D	E	wt
0.36	0.312	--	0.86	--	grams
9.14	7.93	--	21.80	--	5.3

Typical Performance Data

Frequency (GHz)	Insertion Loss (dB)	VSWR (:1)	
		3.5 mm-M	3.5 mm-M
0.05	0.01	1.00	1.01
0.10	0.02	1.00	1.00
0.50	0.02	1.01	1.01
1.00	0.03	1.01	1.01
2.00	0.04	1.01	1.01
3.00	0.07	1.01	1.02
4.00	0.06	1.01	1.01
5.00	0.06	1.01	1.01
10.00	0.08	1.01	1.02
15.00	0.10	1.07	1.08
16.00	0.10	1.08	1.08
18.00	0.12	1.07	1.08
20.00	0.14	1.04	1.05
22.00	0.10	1.01	1.03
24.00	0.16	1.03	1.04
26.00	0.13	1.05	1.04
28.00	0.13	1.02	1.02
30.00	0.16	1.02	1.01
32.00	0.16	1.04	1.05
34.00	0.19	1.04	1.09

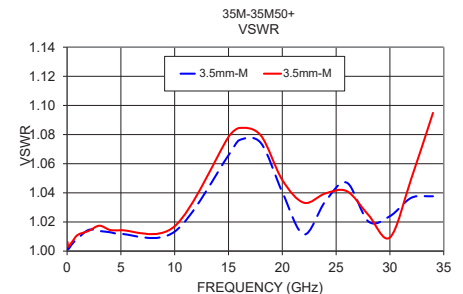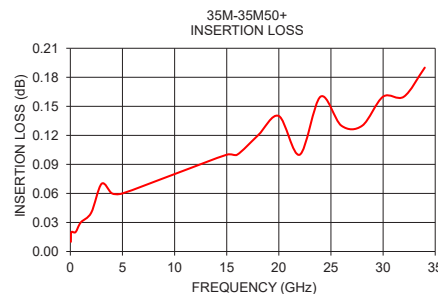

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/WCLStore/terms.jsp



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Adapters - In Series](#) category:

Click to view products by [Mini-Circuits](#) manufacturer:

Other Similar products are found below :

[5916-1103-603](#) [5918-1103-000](#) [5919-1503-000](#) [651A505](#) [82-5552](#) [9030-9523-502](#) [A0407000](#) [R114703000W](#) [R125704000](#) [R125771001](#)
[R141710000W](#) [R141723161](#) [R141730000](#) [R143730700](#) [R143770000](#) [R161703000W](#) [R161730000](#) [R161753000W](#) [R161791500W](#)
[R161791530W](#) [R201705000](#) [R222705200](#) [R222M40010W](#) [R223703180](#) [R316754000](#) [R405006000](#) [R443162000](#) [AD78TL](#) [HRM-513S](#)
[1996352-2](#) [2157155-1](#) [252169-75](#) [AD158](#) [2101130-1](#) [252186](#) [R114704000W](#) [R114720000W](#) [R125705001](#) [R125705701](#) [R125771000](#)
[R125771001W](#) [R125791501W](#) [R127704001](#) [R127.870.001](#) [R127872001](#) [R141717000](#) [R142710000](#) [R142723000](#) [R143703000](#) [R143704000](#)