


# Surface Mount Bandpass Filter

## BPF-F100+

50Ω 95 to 105 MHz

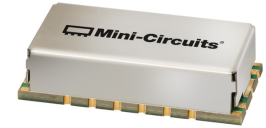

Generic photo used for illustration purposes only  
CASE STYLE: HP1156

### The Big Deal

- Narrow bandwidth
- High Rejection
- Good VSWR
- Shielded package

### Product Overview

BPF-F100+ is a 50Ω bandpass filter in a shielded package fabricated using SMT technology. This bandpass filter covers from 95 to 105 MHz. This unit uses a miniature high Q capacitors and wire welded inductors for high reliability, It has repeatable performance across production lots and consistent performance across temperature.

### Key Features

Feature	Advantages
Narrow bandwidth filter	Narrow bandwidth with fast roll-off, this will attenuate frequencies closer to the passband with good rejection value of > 40 dB which increases selectivity on the adjacent channel
Good rejection	This enables the filter attenuate spurious signals and reject harmonics for broad frequency band.
Shielded package	The small surface mount package enables the BPF-F100+ to used in compact design

#### Notes


- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Surface Mount Bandpass Filter

## BPF-F100+

50Ω 95 to 105 MHz



Generic photo used for illustration purposes only  
CASE STYLE: HP1156

### Features

- Narrow bandwidth
- Sharper cut-off
- Shielded package

### Applications

- Radio test equipment
- Receiver \ Transmitter
- Harmonic rejection

### Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Center Frequency	—	—	100	—	MHz
	Insertion Loss	F1-F2	95-105	5	6	dB
	VSWR	F1-F2	95-105	—	1.58	1.92
Stop Band, Lower	Insertion Loss	DC-F3	DC-85	40	45	dB
	VSWR	DC-F3	DC-85	—	20	—
Stop Band, Upper	Insertion Loss	F4-F5	120-900	40	44	dB
	VSWR	F4-F5	120-900	—	20	—

### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	1 W

Permanent damage may occur if any of these limits are exceeded.

### Functional Schematic

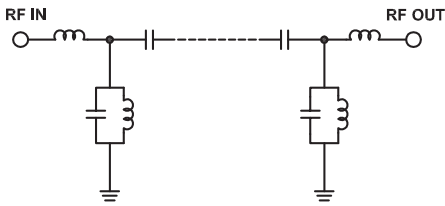





### Typical Frequency Response



### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
1.0	104.96	138.75	95.0	115.55
50.0	83.35	96.51	95.5	110.00
85.0	52.26	35.19	96.0	105.51
88.5	30.98	14.40	96.5	101.78
89.5	23.60	9.11	97.0	98.71
90.0	19.64	6.69	97.5	96.16
92.0	6.69	1.26	98.0	94.05
95.0	3.78	1.25	98.5	92.29
100.0	3.12	1.23	99.0	90.87
105.0	3.60	1.06	99.5	89.78
108.0	6.46	1.98	100.0	88.99
110.5	18.56	9.15	100.5	88.50
111.0	21.13	11.14	101.0	88.26
112.0	25.88	15.20	101.5	88.29
113.0	30.12	19.30	102.0	88.54
116.0	40.59	31.70	102.5	89.10
120.0	51.10	48.50	103.0	89.96
300.0	95.33	817.79	103.5	91.23
500.0	103.03	744.47	104.0	92.91
900.0	93.09	286.61	105.0	97.97

**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

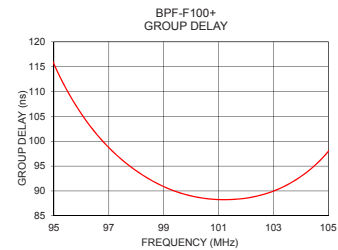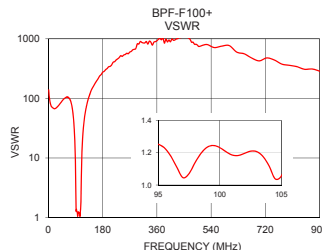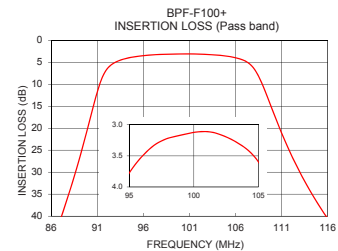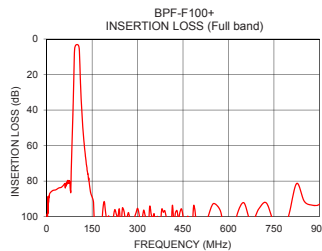

#### Notes


- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



## Pad Connections



INPUT	18
OUTPUT	9
GROUND	1,3,4,5,6,7,8,10,12,13,14,15,16,17
NO CONNECTION	2,11

## Demo Board MCL P/N: TB-695+ Suggested PCB Layout (PL-418)

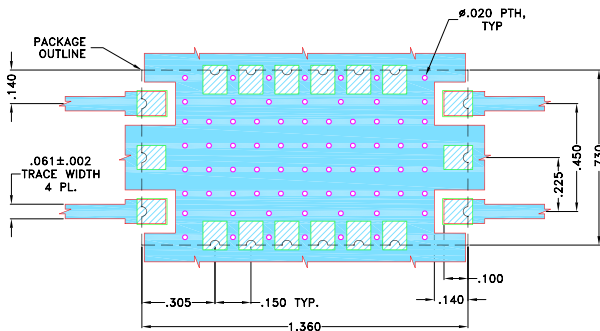

- NOTES:
- TRACE WIDTH IS SHOWN FOR OAK-602, WITH DIELECTRIC THICKNESS  $.022 \pm .0015"$ . COPPER: 1/2 Oz. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
 DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

## Outline Drawing

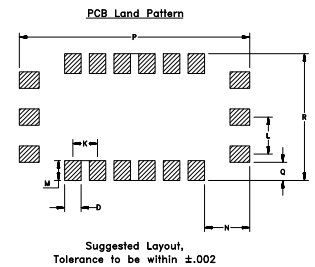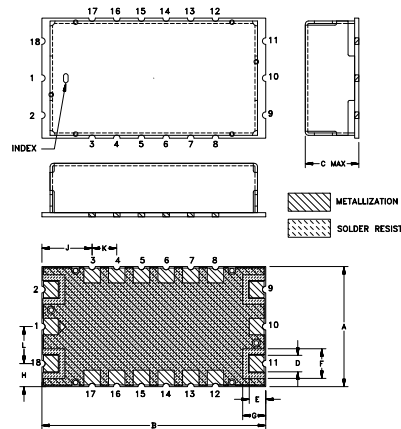

## Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.730	1.360	.350	.100	.100	.180	.140	.140	.305
18.54	34.54	8.89	2.54	2.54	4.57	3.56	3.56	7.75
K	L	M	N	P	Q	R	Wt.	
.150	.225	.120	.275	1.400	.110	.770	grams	
3.81	5.72	3.05	6.99	35.56	2.79	19.56	6.0	

Note: Please refer to case style drawing for details

## Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Signal Conditioning](#) category:*

*Click to view products by [Mini-Circuits](#) manufacturer:*

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#)  
[FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#)  
[C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#)  
[LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#)  
[PD0922J5050D2HF](#) [1E1305-3](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [TP-102-PIN](#) [TP-103-PIN](#) [BD1222J50200AHF](#)