


High Frequency Chip Resistor

SURFACE MOUNT CHIPS



FC series chip resistors are designed with low internal reactance. They function as almost pure resistors on a very high range of frequencies. The specialized laser edge trimming allows for precision tolerances to 0.1%

FEATURES

- Lead (Pb)-Free available
- Small standard size 0402 case size
- Edge trimmed block resistors
- Alumina substrate High Purity 99.6%
- Ohmic range 10 ohms to 1000 ohms
- Small internal reactance
- Low TCR to $\pm 25\text{ppm}/^\circ\text{C}$




APPLICATIONS

- Low noise amplifiers
- Attenuation
- Line termination

STANDARD ELECTRICAL SPECIFICATIONS

		SPECIFICATIONS		CONDITION
MATERIAL		Passivated Nichrome		
Resistance Range		10 Ohms to 1000 Ohms		Case Size Dependant
TCR:		25, (Std) (≥ 50 ohms) to ± 100 ppm/ $^\circ\text{C}$		- 55°C to + 125°C
Tolerance:		$\pm 0.1\%$, $\pm 0.5\%$, $\pm 1.0\%$ and $\pm 5.0\%$		+ 25°C
Component Ratings	CASE SIZE	Power Rating	Working Voltage	
	0201	30mW	30 Volts	Max @ + 70°C
	0402	50 mW	30 Volts	Max. @ + 70°C
	0505	125 mW	37 Volts	Max. @ + 70°C
	0603	125 mW	50 Volts	Max. @ + 70°C
	0805	200 mW	50 Volts	Max. @ + 70°C
	1005	250 mW	75 Volts	Max. @ + 70°C
	1206	330 mW	75 Volts	Max. @ + 70°C
Stability		500 ppm		2000 hrs @ + 70°C
Operating Temperature Range		- 55°C to + 125°C		

VISHAY THIN FILM • FRANCE +33.4.93.37.28.24 FAX: +33.4.93.37.27.31 • GERMANY +49.9287.710 FAX: +49 9287.70435 • ISRAEL +972.3.557.0945 FAX: +972.3.558.9121
 • ITALY + 39.2.300.11919 FAX: +39.2.300.11999 • JAPAN +81.3.5464.6411 FAX: +81.3.5464.6433 • SINGAPORE +65.788.6668 FAX: +65.788.0988
 • SWEDEN +46.8.594.70590 FAX: +46.8.594.70581 • UK +44 191 514 8237 FAX: +44 1953 457 722 • USA: (610) 407-4800 FAX: (610) 640-9081

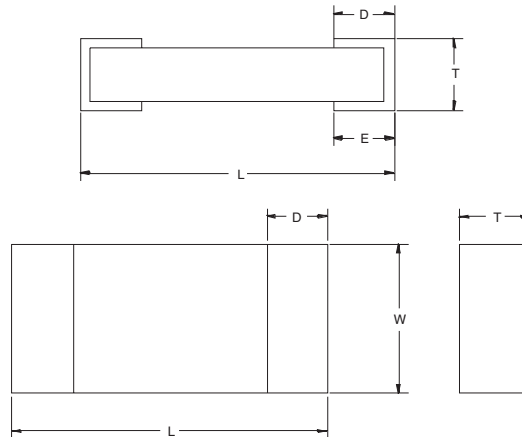DIMENSIONS in inches


CASE SIZE	LENGTH	WIDTH W (± 0.005)	THICKNESS MIN/MAX	TOP PAD D (± 0.005)	BOTTOM PAD E (± 0.005)
0201	0.020 \pm 0.002	0.010 \pm 0.002	0.010 / 0.020	0.005 \pm 0.002	0.005 \pm 0.002
0402	0.040 \pm 0.003 [1.016 \pm 0.076]	0.020 [0.508]	0.015 [0.381]	0.012 [0.305]	0.015 [0.381]
0505	0.050 \pm 0.005 [1.270 \pm 0.127]	0.050 [1.270]	0.015 [0.381]	0.012 [0.305]	0.015 [0.381]
0603	0.064 \pm 0.006 [1.626 \pm 0.153]	0.032 [0.813]	0.015 [0.381]	0.012 [0.305]	0.015 [0.381]
0805	0.080 \pm 0.006 [2.032 \pm 0.153]	0.050 [1.270]	0.015 [0.381]	0.016 \pm 0.008 [0.407 \pm 0.254]	0.015 [0.381]
1005	0.100 \pm 0.008 [2.540 \pm 0.204]	0.053 [1.347]	0.025 [0.635]	0.020 +0.005/-0.010 [0.508 + 0.127/-0.254]	
1206	0.126 \pm 0.008 [3.201 \pm 0.204]	0.063 [1.601]	0.025 [0.635]	0.020 +0.005/-0.010 [0.508 + 0.127/-0.254]	

MECHANICAL SPECIFICATIONS	
Resistive Element	Passivated Nichrome
Substrate Material	Alumina (99.6%)
Terminations	Gold or SN 60 Solder over Nickel barrier
Lead (Pb)-free Option	96.5% Sn, 3.0% Ag, 0.5% Cu
Lead (Pb)-free Finish	Hot Solder Dip


How to Order

Series	Size	TCR \pm (ppm/ $^{\circ}$ C)	Nominal	Tolerance \pm (%)	Termination	Packaging
FC	0201 0402 0505 0603 0805 1005 1205	*E = 25 H = 50 K = 100 * \geq 50 ohms only	4 digits. The first 3 digits are significant figures and the last digit specifies the number of zeros to follow Eg. 10R0 = 10 ohms 1000 = 100 ohms	*B = 0.1 % D = 0.5 % F = 1.0 % J = 5.0 % * \geq 50 ohms only	T = Top side Gold (Std) B = Tinned wraparound G = Gold wraparound TB = Top side Solder TBS = Top side Solder Lead (Pb)-Free S = Wraparound Lead (Pb)-Free Solder	W = Waffle pack T = Tape and reel

VISHAY THIN FILM • FRANCE +33.4.93.37.28.24 FAX: +33.4.93.37.27.31 • GERMANY +49.9287.710 FAX: +49 9287.70435 • ISRAEL +972.3.557.0945 FAX: +972.3.558.9121
 • ITALY + 39.2.300.11919 FAX: +39.2.300.11999 • JAPAN +81.3.5464.6411 FAX: +81.3.5464.6433 • SINGAPORE +65.788.6668 FAX: +65.788.0988
 • SWEDEN +46.8.594.70590 FAX: +46.8.594.70581 • UK +44 191 514 8237 FAX: +44 1953 457 722 • USA: (610) 407-4800 FAX: (610) 640-9081

**SURFACE MOUNT
CHIPS**


TYPICAL HIGH FREQUENCY PERFORMANCE ELECTRICAL MODEL AND TESTING

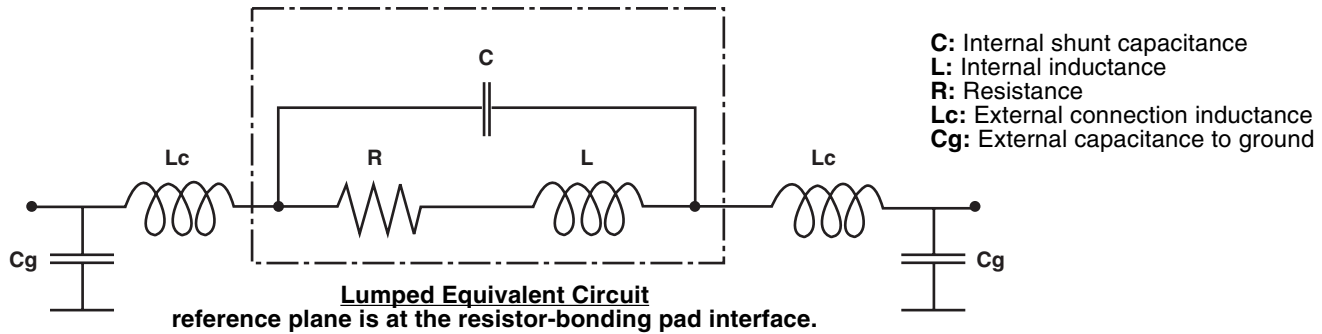


The lumped circuit above was used to model the data at the bonding pad-resistor reference plane. High frequency testing was performed by Modelithics, Inc. on parts mounted to quartz test boards. Quartz test boards were chosen to minimize the contribution of the board effects at high frequencies. Future testing will be performed on various industry standard board types. Vishay in partnership with Modelithics, Inc. will develop substrate scalable models for the FC series resistors. These models will be available for industry standard design software packages and will allow the designer to accurately model their wireless and microwave printed boards.

SURFACE MOUNT CHIPS


INTERNAL IMPEDANCE FOR 0201 FLIP CHIP

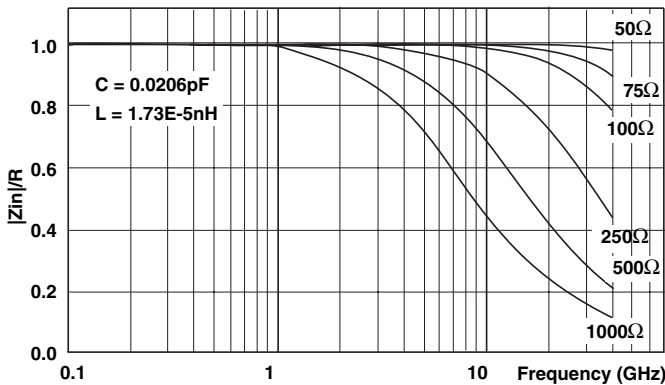


INTERNAL IMPEDANCE FOR 0402 FLIP CHIP

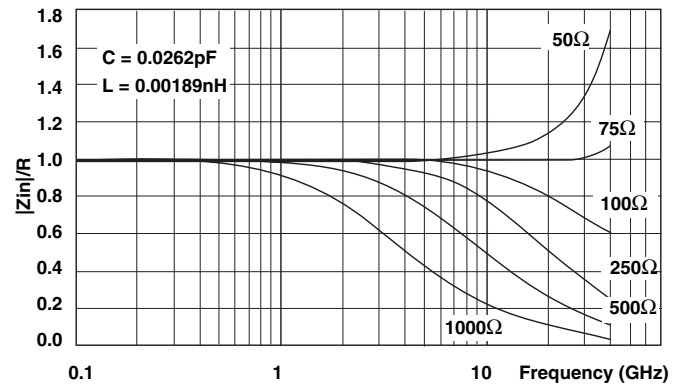

INTERNAL IMPEDANCE FOR 0603 FLIP CHIP

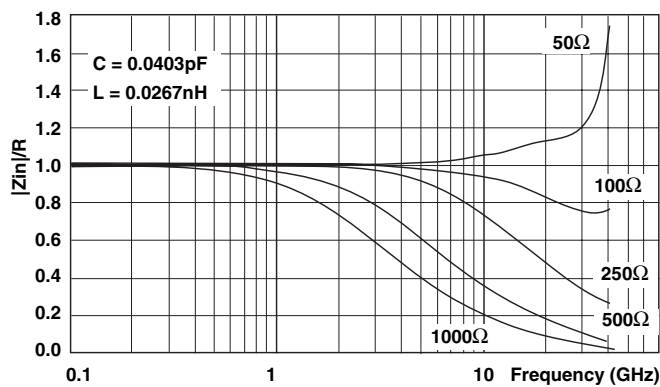

INTERNAL IMPEDANCE FOR 0402 WRAP AROUND

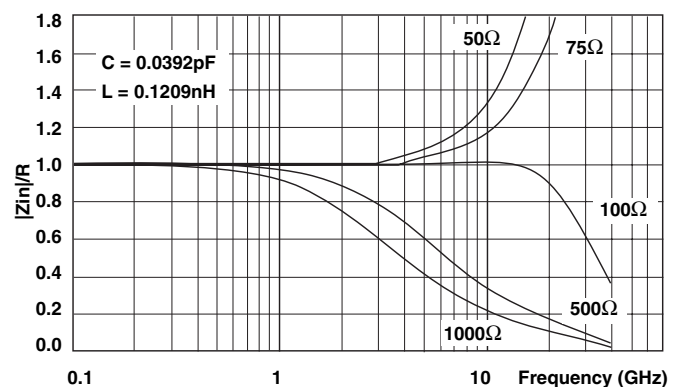



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [vishay](#) manufacturer:

Other Similar products are found below :

[M39006/22-0577H](#) [Y00892K49000BR13L](#) [VSKT250-16PBF](#) [M8340109M6801GGD03](#) [NTCALUG01A103F291L](#) [ITU1341SM3](#) [VS-MBRB1545CTPBF](#) [1KAB100E](#) [1KAB20E](#) [IH10EB600K12](#) [CP0005150R0JE1490](#) [562R5GAD47RR](#) [S472M69Z5UR84K0R](#)
[MKP1848C65090JY5L](#) [CRCW1210360RFKEA](#) [VSMF4720-GS08](#) [TSOP34438SS1V](#) [CRCW04024021FRT7](#) [001789X](#)
[CRCW08054K00FKTA](#) [LVR10R0200FE03](#) [CRCW12063K30FKEAHP](#) [009923A](#) [CRCW2010331JR02](#) [CRCW25128K06FKEG](#)
[CS6600552K000B8768](#) [CSC07A0110K0GPA](#) [M34C156K100BZSS](#) [M39003/01-2289](#) [M39003/01-2784](#) [M39006/25-0133](#) [M39006/25-0228](#)
[M64W101KB40](#) [M64Z501KB40](#) [CW001R5000JS73](#) [CW0055R000JE12](#) [CW0056K800JB12](#) [CW0106K000JE73](#) [672D826H075EK5C](#)
[CWR06JC105KC](#) [CWR06NC475JC](#) [MAL219699001E3](#) [MCRL007035R00JHB00](#) [PTF56100K00QYEK](#) [PTN0805H1502BBTR1K](#)
[RCWL1210R130JNEA](#) [RH005220R0FE02](#) [RH005330R0FC02](#) [RH010R0500FC02](#) [132B20103](#)