


High Pass Filter

HFCV-145+

50Ω 140 to 1150 MHz



CASE STYLE: JV1210C

The Big Deal:

- Small size 3.2mm x 2.5 mm
- High Power handling (8W)
- High rejection (20 dB typ)
- Ceramic construction

Product Overview:

New High Pass Filter HFCV-145+ is an LTCC based 7 section design, that extends the lower frequency cutoff range of the existing HFCN series to 145 MHz. Systems that previously relied on active or lumped element filtering to support these lower frequencies can save power and system complexity by integrating the HFCV-145+ into new designs. These filters are offered in a EIA 1210 package size and have a typical stop band rejection of 20 dB.

Summary Performance

Insertion Loss (Pass band)	1.5 dB Max.	155-1050 MHz
Return Loss (Pass band)	15 dB Typ.	155-1050 MHz
Stop band Rejection	15 dB Min.	115 MHz
Stop band Rejection	20 dB typ.	80 MHz

Key Features

Feature	Advantages
Small Size (3.2mm x2.5 mm)	Available in the size of typical resistors or capacitors (EIA 1210), the ultra small HFCV series integrates up to 7 low pass sections in a simple SMT chip form factor.
High Power Handling	The HFCV series can withstand up to 8W CW signal without damage making this filter ideal for use in medium power to transmit paths.
Temperature Stability	Over a 155°C operating temperature range (-55°C to +100°C), the HFCV series ceramic filters typically exhibit less than 0.2 dB pass band insertion loss variation.
High Rejection	Achieving 20dB rejection @80 MHz; the HFCV-145+ provides a versatile high pass configuration for many up converter applications.

Notes


- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Ceramic High Pass Filter

50Ω 140 to 1150 MHz

HFCV-145+



Generic photo used for illustration purposes only

CASE STYLE: JV1210C

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500, 1000, 3000

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	8.5W max. at 25°C

* Passband rating, derate linearly to 3.5W at 100°C ambient. Permanent damage may occur if any of these limits are exceeded.


Pin Connections

RF IN	1
RF OUT	3
GROUND	2,4

Outline Drawing

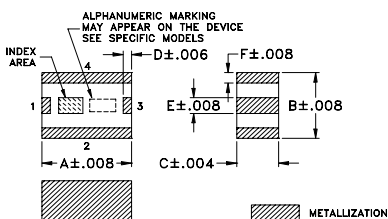

PCB Land Pattern

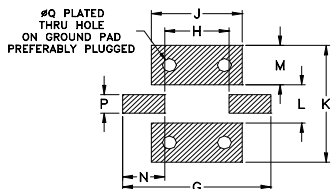


Suggested Layout, Tolerance to be within ±.002

Outline Dimensions (inch)

A	B	C	D	E	F	G	H
.126	.098	.059	.012	.024	.016	.209	.091
3.20	2.49	1.50	0.30	0.61	0.41	5.31	2.31
J	K	L	M	N	P	Q	wt
.128	.175	.057	.059	.059	.028	.020	grams
3.25	4.45	1.45	1.60	1.60	0.71	0.51	.03

Demo Board MCL P/N: TB-526+ Suggested PCB Layout (PL-307)

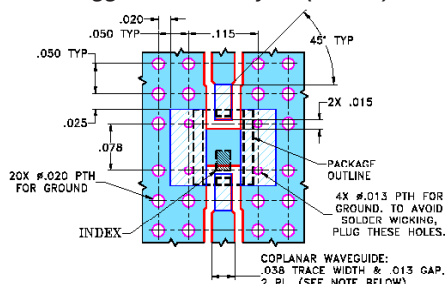

- NOTES:
- COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Features

- low cost
- small size
- 7 sections
- temperature stable
- dc block in/out, breakdown voltage, 1kV typ.
- excellent power handling, 8.5W
- hermetically sealed

Applications


- sub-harmonic rejection and dc blocking
- transmitters/receivers
- lab use

Electrical Specifications¹ at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Stop Band	Rejection Loss	DC-F1	DC-80	20		dB
		DC-F2	DC-115	15		dB
	Freq. Cut-Off	F3	132	3.0		dB
	VSWR	DC-F2	DC-115	20		:1
Pass Band	Insertion Loss	F5-F6	155-1050		1.5	dB
		F4-F7	140-1150		3.0	dB
	VSWR	F5-F7	155-1150	1.5		:1

1. Measured on Mini-Circuits Characterization Test Board TB-526+.

Typical Frequency Response


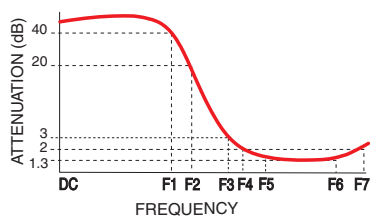


Electrical Schematic

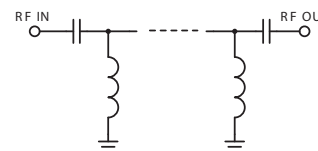

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1.0	54.15	354.02
50.0	23.83	154.04
100.0	21.45	26.11
200.0	0.52	1.27
300.0	0.42	1.39
500.0	0.34	1.25
600.0	0.34	1.22
700.0	0.37	1.23
800.0	0.42	1.28
900.0	0.52	1.39
1000.0	0.69	1.58
1100.0	1.00	1.90
1120.0	1.09	1.99
1150.0	1.24	2.14
1200.0	1.55	2.45

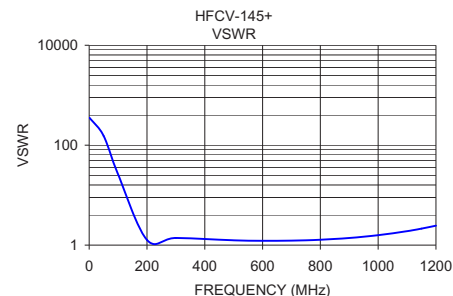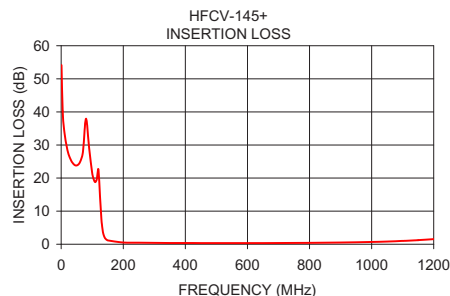

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Mini-Circuits](#) manufacturer:

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#) [FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#) [C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#) [PD0922J5050D2HF](#) [1E1305-3](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [TP-102-PIN](#) [TP-103-PIN](#) [BD1222J50200AHF](#)