


FREQUENCY MIXERS

Designer's Kit K1-ADE+

MINI-CIRCUITS DESIGNER'S KITS
SPEED UP
 THE SOLUTION!

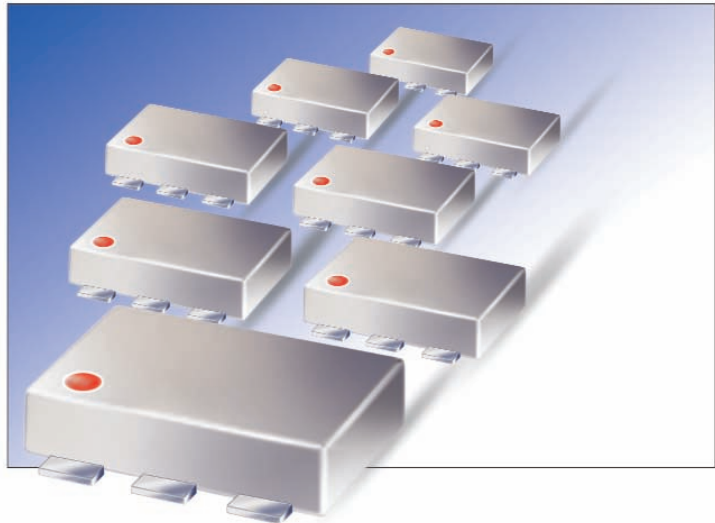

2 to 4000 MHz

ADE+ Features

- Wide bandwidth
- Low conversion loss, 6 dB
- High L-R isolation, up to 60 dB typ.
- Large selection of models, LO level 3, 4, 7, 13, 17
- Low profile, 0.11"
- Very low cost



All models are
RoHS compliant

Kit K1-ADE+ Electrical specifications of each model (8 models, 5 of each, 40 total)

Model	LO Level (dBm)	Frequency (MHz)		Conversion Loss (dB)			RF In @ 1 dB Compr. (dBm)	IP3 (dBm)	LO-RF Isolation (dB)	LO-IF Isolation (dB)
		LO/RF	IF	Typ.	σ	Max.				
ADE-1L+	3.0	2-500	DC-500	5.2	0.1	8.0	0	16	55	45
ADEX-10L+	4.0	10-1000	DC-800	7.2	0.1	8.8	1.0	16	60	33
ADE-2+	7.0	5.0-1000	DC-1000	6.67	0.26	9.5	1.0	20	47	45
ADE-18W+	7.0	1750-3500	DC-700	5.4	0.30	8.9	1.0	11	33	12
ADE-30W+	7.0	300-4000	DC-950	6.8	0.20	9.8	1.0	12	35	16
ADE-35MH+	13	5.0-3500	5.0-2500	6.9	0.10	10.5	9	18	33	28
ADE-17H+	17	100-1700	50-1500	7.2	0.10	9.5	14	25	35	32
ADEX-10H+	17	10-1000	DC-800	7.0	0.10	9.5	14	22	55	32

Protected under U.S. Patent 6,133,525 ADEX models additional U.S. Patent 6,947,717



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For quick access to product information see MINI-CIRCUITS CATALOG & WEB SITE

RF/IF & MICROWAVE COMPONENTS

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Development Tools](#) category:

Click to view products by [Mini-Circuits](#) manufacturer:

Other Similar products are found below :

[MAAM-011117](#) [MAAP-015036-DIEEV2](#) [EV1HMC1113LP5](#) [EV1HMC6146BLC5A](#) [EV1HMC637ALP5](#) [122410-HMC686LP4E](#) [ADL5363-EVALZ](#) [130437-HMC1010LP4E](#) [EKIT01-HMC1197LP7F](#) [SKYA21001-EVB](#) [SMP1331-085-EVB](#) [EVAL01-HMC1041LC4](#) [MAAL-011111-000SMB](#) [MAAM-009633-001SMB](#) [107712-HMC369LP3](#) [107780-HMC322ALP4](#) [SP000416870](#) [EV1HMC520ALC4](#) [EV1HMC244AG16](#) [EV1HMC539ALP3](#) [124694-HMC742ALP5](#) [SC20ASATEA-8GB-STD](#) [MAX2692EVKIT#](#) [SKY12343-364LF-EVB](#) [108703-HMC452QS16G](#) [119197-HMC658LP2](#) [EV1HMC647ALP6](#) [ADL5725-EVALZ](#) [106815-HMC441LM1](#) [UXN14M9PE](#) [SIMSA868-DKL](#) [SIMSA868C-DKL](#) [SKY65806-636EK1](#) [SKY68020-11EK1](#) [SKY67159-396EK1](#) [SKY66181-11-EK1](#) [SKY65804-696EK1](#) [SKY13396-397LF-EVB](#) [SKY13380-350LF-EVB](#) [SKY13355-374LF-EVB](#) [SKY13322-375LF-EVB](#) [SKY12207-478LF-EVB](#) [SE5023L-EK1](#) [SE5004L-EK1](#) [SE2436L-EK1](#) [Se2435L-EK1](#) [CLA4609-086-EVB](#) [SIMSA915C-DKL](#) [SIMSA915-DKL](#) [SIMSA433C-DKL](#)