




DESIGNER'S KIT K1-EQY453+

MMIC Equalizers

50Ω DC to 45 GHz

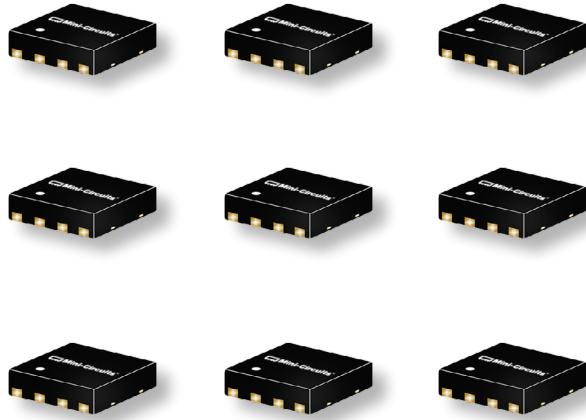

FEATURES

- Ultra-Wide Bandwidth DC-45 GHz, 50Ω
- Input power 0.5 to 1W max.
- Excellent VSWR
- Miniature 2 x 2mm case
- Low cost

MINI-CIRCUITS DESIGNER'S KITS
SPEED UP
THE SOLUTION



K1-EQY453+ ELECTRICAL SPECIFICATIONS

(kit includes 8 models, 5 of each, 40 pcs total)

Model	Frequency (GHz) f_L-f_U	Insertion loss (dB) Typ.						VSWR (:1) Typ.					Input Power ¹ (dBm) Max.
		DC GHz	10 GHz	20 GHz	30 GHz	40 GHz	45 GHz	DC-10 GHz	10-20 GHz	20-30 GHz	30-40 GHz	40-45 GHz	
EQY-3-453+	DC-45	4.6	4.4	3.6	2.4	1.1	0.9	1.2	1.1	1.2	1.3	1.3	30
EQY-4-453+	DC-45	5.6	5.3	4.3	2.9	1.5	1.1	1.16	1.16	1.24	1.34	1.46	29
EQY-5-453+	DC-45	6.6	6.0	4.4	2.8	1.5	1.1	1.14	1.18	1.29	1.33	1.39	28
EQY-6-453+	DC-45	7.6	6.5	4.5	2.7	1.5	1.1	1.14	1.17	1.29	1.36	1.47	28
EQY-7-453+	DC-45	8.7	7.3	5.0	3.0	1.7	1.3	1.2	1.16	1.23	1.29	1.43	27
EQY-8-453+	DC-45	9.4	7.9	5.3	3.0	1.5	1.2	1.25	1.13	1.17	1.23	1.33	27
EQY-9-453+	DC-45	10.6	9.1	6.5	3.9	2.0	1.5	1.22	1.13	1.22	1.27	1.41	28
EQY-10-453+	DC-45	12	10	6.9	4.3	2.4	1.8	1.17	1.2	1.27	1.28	1.44	28

1. RF Power at 25°C case temperature. Check Individual Model Data

REV. A
ECO-009230
K1-EQY453+
MCL-NY
210812

Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Development Tools category:

Click to view products by Mini-Circuits manufacturer:

Other Similar products are found below :

[MAAM-011117](#) [MAAP-015036-DIEEV2](#) [EV1HMC1113LP5](#) [EV1HMC6146BLC5A](#) [EV1HMC637ALP5](#) [122410-HMC686LP4E](#) [ADL5363-EVALZ](#) [130437-HMC1010LP4E](#) [EKIT01-HMC1197LP7F](#) [SKYA21001-EVB](#) [SMP1331-085-EVB](#) [EVAL01-HMC1041LC4](#) [MAAL-011111-000SMB](#) [MAAM-009633-001SMB](#) [107712-HMC369LP3](#) [107780-HMC322ALP4](#) [SP000416870](#) [EV1HMC520ALC4](#) [EV1HMC244AG16](#) [EV1HMC539ALP3](#) [124694-HMC742ALP5](#) [SC20ASATEA-8GB-STD](#) [MAX2692EVKIT#](#) [SKY12343-364LF-EVB](#) [108703-HMC452QS16G](#) [119197-HMC658LP2](#) [EV1HMC647ALP6](#) [ADL5725-EVALZ](#) [106815-HMC441LM1](#) [UXN14M9PE](#) [SIMSA868-DKL](#) [SIMSA868C-DKL](#) [SKY65806-636EK1](#) [SKY68020-11EK1](#) [SKY67159-396EK1](#) [SKY66181-11-EK1](#) [SKY65804-696EK1](#) [SKY13396-397LF-EVB](#) [SKY13380-350LF-EVB](#) [SKY13355-374LF-EVB](#) [SKY13322-375LF-EVB](#) [SKY12207-478LF-EVB](#) [SE5023L-EK1](#) [SE5004L-EK1](#) [SE2436L-EK1](#) [Se2435L-EK1](#) [CLA4609-086-EVB](#) [SIMSA915C-DKL](#) [SIMSA915-DKL](#) [SIMSA433C-DKL](#)