


FREQUENCY MIXERS

Designer's Kit K1-SIM+

MINI-CIRCUITS DESIGNER'S KITS
SPEED UP
 THE SOLUTION!

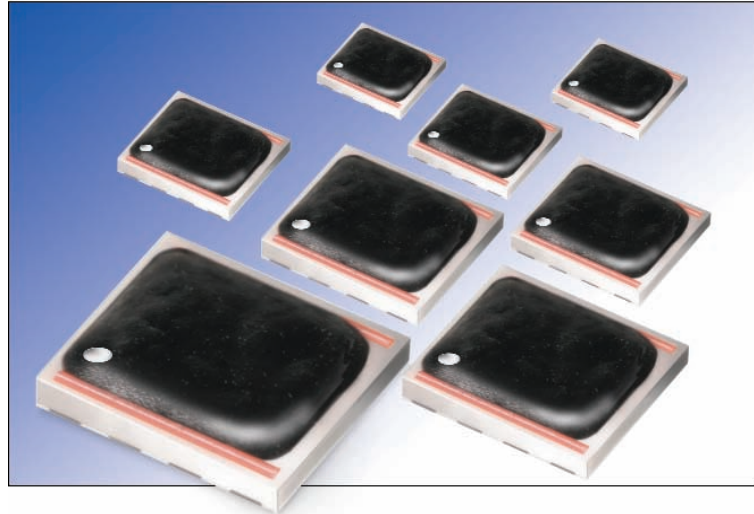

750 to 15000MHz

SIM+ Features

- Useable as up and down converter
- Wide bandwidth, 750 to 15000MHz
- Low conversion loss
- High L-R isolation
- Wide IF bandwidth, up to 4GHz
- Rugged LTCC construction
- Low profile, 0.08", low cost



All models are
RoHS compliant

Kit K1-SIM+ Electrical specifications of each model (8 models, 5 of each, 40 total)

Model	LO Level (dBm)	Frequency (MHz)		Conversion Loss (dB)			RF In at 1dB Compr. (dBm)	IP3 (dBm)	LO-RF Isolation (dB)	LO-IF Isolation (dB)
		LO/RF	IF	Typ.	σ	Max.				
SIM-73L+	4.0	2400-7000	DC-3000	6.3	0.20	8.5	1.0	12	32	26
SIM-14+	7.0	3700-10000	DC-4000	6.3	0.20	9.5	1.0	13	36	16
SIM-43+	7.0	750-4200	DC-1500	6.3	0.20	8.6	1.0	12	37	24
SIM-83+	7.0	2300-8000	DC-3000	6.0	0.20	8.9	1.0	15	32	28
SIM-153+	7.0	3400-15000	DC-4000	8.0	0.40	13.2	1.0	10	36	30
SIM-63LH+	10.0	750-6000	DC-1500	6.6	0.20	9.3	3.0	12	32	22
SIM-83LH+	10.0	1700-8000	DC-3000	6.0	0.20	8.4	3.0	18	31	28
SIM-153LH+	10.0	3200-15000	DC-4000	7.5	0.30	12.4	3.0	18	36	20

Protected under U.S. Patent 7,027,795



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For quick access to product information see MINI-CIRCUITS CATALOG & WEB SITE

RF/IF MICROWAVE COMPONENTS

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Development Tools](#) category:

Click to view products by [Mini-Circuits](#) manufacturer:

Other Similar products are found below :

[MAAM-011117](#) [MAAP-015036-DIEEV2](#) [EV1HMC1113LP5](#) [EV1HMC6146BLC5A](#) [EV1HMC637ALP5](#) [122410-HMC686LP4E](#) [ADL5363-EVALZ](#) [130437-HMC1010LP4E](#) [EKIT01-HMC1197LP7F](#) [SKYA21001-EVB](#) [SMP1331-085-EVB](#) [EVAL01-HMC1041LC4](#) [MAAL-011111-000SMB](#) [MAAM-009633-001SMB](#) [107712-HMC369LP3](#) [107780-HMC322ALP4](#) [SP000416870](#) [EV1HMC520ALC4](#) [EV1HMC244AG16](#) [EV1HMC539ALP3](#) [124694-HMC742ALP5](#) [SC20ASATEA-8GB-STD](#) [MAX2692EVKIT#](#) [SKY12343-364LF-EVB](#) [108703-HMC452QS16G](#) [119197-HMC658LP2](#) [EV1HMC647ALP6](#) [ADL5725-EVALZ](#) [106815-HMC441LM1](#) [UXN14M9PE](#) [SIMSA868-DKL](#) [SIMSA868C-DKL](#) [SKY65806-636EK1](#) [SKY68020-11EK1](#) [SKY67159-396EK1](#) [SKY66181-11-EK1](#) [SKY65804-696EK1](#) [SKY13396-397LF-EVB](#) [SKY13380-350LF-EVB](#) [SKY13355-374LF-EVB](#) [SKY13322-375LF-EVB](#) [SKY12207-478LF-EVB](#) [SE5023L-EK1](#) [SE5004L-EK1](#) [SE2436L-EK1](#) [Se2435L-EK1](#) [CLA4609-086-EVB](#) [SIMSA915C-DKL](#) [SIMSA915-DKL](#) [SIMSA433C-DKL](#)