
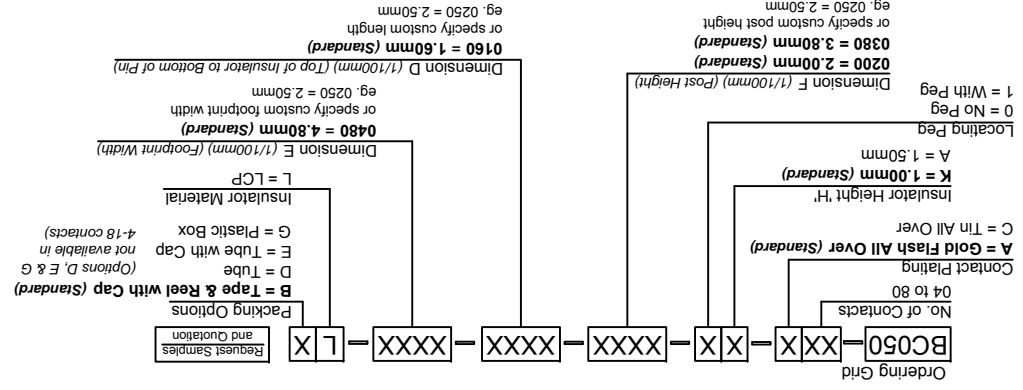

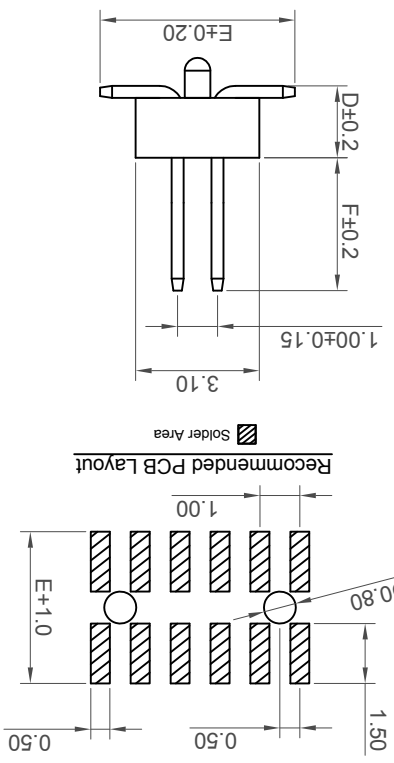


BC084 BC085
 合的条件下):
 Manual Solder 人工焊接: 350°C for 3-5 sec
 IR Reflow 回流焊: 260°C for 10 sec.

Operating Temperature 工作温度: -40°C to +105°C
 Mechanical & Environmental 机械 & 环境
 Dielectric Withstand Voltage 耐压电压: 300 V AC
 Insulation Resistance 绝缘电阻: 1000 MΩ min.
 Contact Resistance 接触电阻: 20 mΩ max.
 Current Rating 电流额定值: 1 Amp

Electrical 电气
 See Ordering Grid
 Plating 电镀
 Contact Housing 接触外壳: Polyester, LCP, UL94-V0
 Contact 接触: Copper Alloy
 Material 物料

Specifications 规格

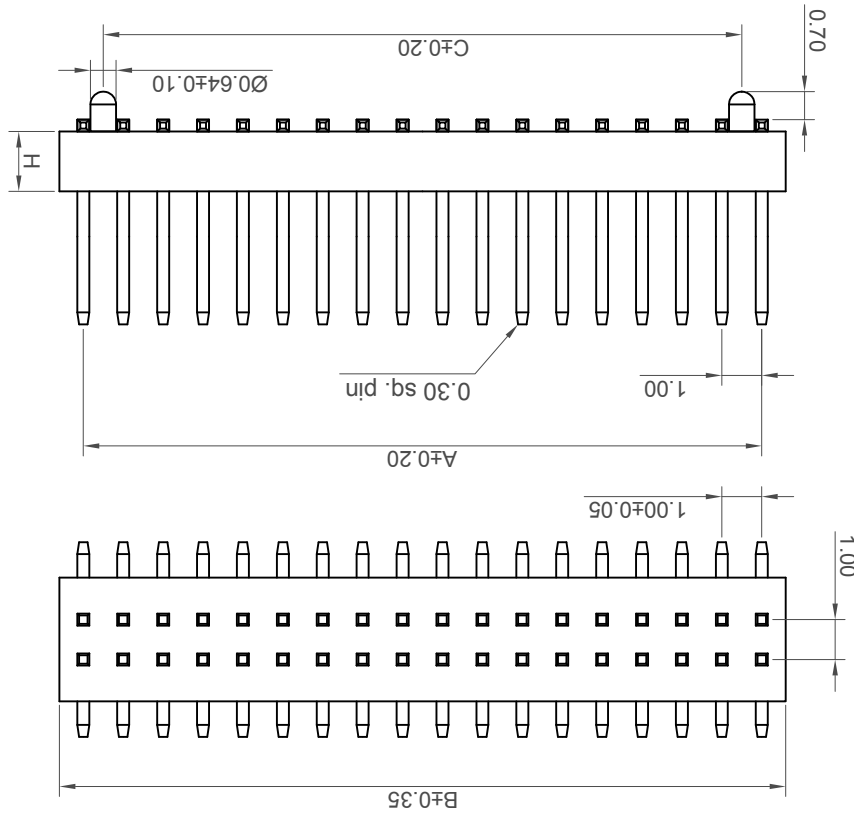

Request Samples and Quotation

Packing Options
 B = Tape & Reel with Cap (Standard)
 D = Tube
 E = Tube with Cap (Options D, E & G)
 G = Plastic Box
 Insulator Material
 L = LCP

Dimension E (1/100mm) (Footprint Width)
 0480 = 4.80mm (Standard)
 or specify custom width
 eg. 0250 = 2.50mm

Dimension D (1/100mm) (Top of Insulator to Bottom of Pin)
 0160 = 1.60mm (Standard)
 or specify custom length
 eg. 0250 = 2.50mm

Dimension F (1/100mm) (Post Height)
 0200 = 2.00mm (Standard)
 0380 = 3.80mm (Standard)
 or specify custom post height
 eg. 0250 = 2.50mm

Part Number	BC050
Product Description	1.0mm Pitch Pin Header, Dual Row, Surface Mount, Vertical
By	ASE
Date	06/01/10
Revision	F
Detail	Packaging
Clarification	X.XX ± 0.25
Angle	X.XX ± 5°
Length	X.XXX ± 0.10
Tolerances (Except as Noted)	X.XXX ± 0.15
Units:	Metric (mm)
3rd Angle Projection	
COMPLIANT 2011/REUSE	
ROHS	
This drawing is confidential and copyright to Global Connector Technology, Ltd (GCT).	
or disclosed without written consent. E & OE	
Scale	Not to Scale
Drawn By	ASE
Sheet No.	1/1

Number of Contacts	A	B	Dimensions	
4	1.00	2.00	--	--
6	2.00	3.00	--	--
8	3.00	4.00	--	--
10	4.00	5.00	3.00	4.00
12	5.00	6.00	4.00	5.00
14	6.00	7.00	5.00	6.00
16	7.00	8.00	6.00	7.00
18	8.00	9.00	7.00	8.00
20	9.00	10.00	8.00	9.00
22	10.00	11.00	9.00	10.00
24	11.00	12.00	10.00	11.00
26	12.00	13.00	11.00	12.00
28	13.00	14.00	12.00	13.00
30	14.00	15.00	13.00	14.00
32	15.00	16.00	14.00	15.00
34	16.00	17.00	15.00	16.00
36	17.00	18.00	16.00	17.00
38	18.00	19.00	17.00	18.00
40	19.00	20.00	18.00	19.00
42	20.00	21.00	19.00	20.00
44	21.00	22.00	20.00	21.00
46	22.00	23.00	21.00	22.00
48	23.00	24.00	22.00	23.00
50	24.00	25.00	23.00	24.00
52	25.00	26.00	24.00	25.00
54	26.00	27.00	25.00	26.00
56	27.00	28.00	26.00	27.00
58	28.00	29.00	27.00	28.00
60	29.00	30.00	28.00	29.00
62	30.00	31.00	29.00	30.00
64	31.00	32.00	30.00	31.00
66	32.00	33.00	31.00	32.00
68	33.00	34.00	32.00	33.00
70	34.00	35.00	33.00	34.00
72	35.00	36.00	34.00	35.00
74	36.00	37.00	35.00	36.00
76	37.00	38.00	36.00	37.00
78	38.00	39.00	37.00	38.00
80	39.00	40.00	38.00	39.00

Global Connector Technology
 www.gct.co



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [FFC & FPC Connectors](#) category:

Click to view products by [GCT manufacturer](#):

Other Similar products are found below :

[HFW11R-1STE1H1LF](#) [FH29B-100S-0.2SHW\(99\)](#) [FA5S008HP1](#) [FH29B-120S-0.2SHW\(99\)](#) [FH29B-80S-0.2SHW\(99\)](#) [FHS-16](#) [FPH-2022G](#)
[52610-1075](#) [52610-1275](#) [52610-1934](#) [XF3M\(1\)-1415-1B-R100](#) [501864-3091-TR225](#) [0525594033](#) [086210010340800](#) [086222026001800](#)
[52271-2869-CUT-TAPE](#) [62674-201121DLF](#) [62684-36210E9ALF](#) [52610-1675](#) [52746-1671-TR250](#) [10051922-2810EHLF](#) [6-520415-9](#)
[BD021-09A-A1-0350-0200-0550-LD](#) [SFV6R-1STE9HLF](#) [XF3M-2915-1B-R100](#) [1658549-1](#) [62674-221121ALF](#) [46214008010800](#)
[046298003000883](#) [151660622](#) [842-816-2630-035](#) [AYF530665TA](#) [AYF351525](#) [046296011930846+](#) [AYF352325A](#) [046254020000800+](#)
[FH19C-13S-0.5SH\(99\)](#) [FH39J-51S-0.3SHW\(99\)](#) [AYF355125A](#) [AYF530365TA](#) [FH29B-44S-0.2SHW\(99\)](#) [SFW5R-2STAE9LF](#) [AYF351125A](#)
[AYF350725A](#) [62684-502100AHLF](#) [FH39-61S-0.3SHW\(99\)](#) [AYF414035A](#) [10064555-172520HLF](#) [AYF212335A](#) [504754-2500](#)