


LOW PASS FILTERS

Designer's Kit K2-LFCN+

MINI-CIRCUITS DESIGNER'S KITS
SPEED UP
 THE SOLUTION!

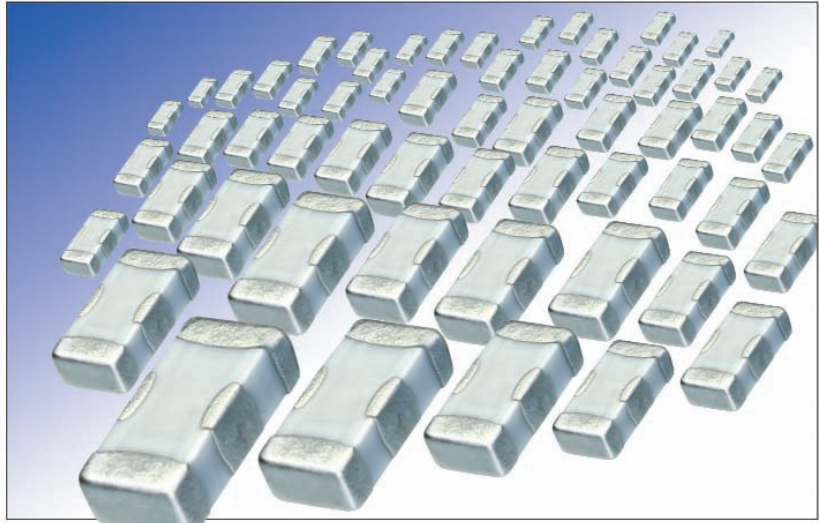

Passband DC to 6700MHz

LFCN+ Features

- Wideband, 50Ω
- LTCC Low Temperature Co-fired Ceramic
- Small size (L)0.12" x (W)0.06"
- Temperature stable
- Repeatable performance
- Excellent power handling
- Hermetically sealed
- Low cost



All models are
 RoHS compliant

Kit K2-LFCN+ Electrical specifications of each model (12 models, 5 of each, 60 total)

Model	Passband (MHz)	fco, (MHz) Nom.	Stopband (MHz) (loss, dB)			VSWR (:1)		Power Input* (W) Max.	No. of Sections
			(loss < 1dB) [†] Max.	(loss 3dB) Typ.	f 20 Min.	30 Typ.	fr 20 Typ.		
LFCN-800+	DC-800	990	1400	1500-2000	4500	20	1.2	9	5
• LFCN-900+	DC-850	1075	1275	1350-4850	5100	20	1.2	10	7
• LFCN-1000+	DC-1000	1300	1550	1900-5000	5500	20	1.3	10	7
• LFCN-1200+	DC-1200	1530	1865	2000-5000	6200	20	1.2	10	7
• LFCN-1325+	DC-1325	1560	2100	2200-2600	4250	20	1.4	9	5
• LFCN-1700+	DC-1700	2050	2375	2500-6500	7000	20	1.2	10	7
• LFCN-2000+	DC-2000	2275	3000	3100-3500	4600	20	1.3	9	5
• LFCN-2250+	DC-2200	2575	2900	3000-5000	7200	20	1.2	10	7
• LFCN-2400+	DC-2400	2800	3600	3700-4000	5000	20	1.2	9	5
• LFCN-5000+	DC-5000	5580	6850	7050-10000	18000	20	1.2	9	7
• LFCN-6000+	DC-6000	6800	8500	8700-10500	18000	20	1.3	9	7
• LFCN-6700+	DC-6700	7600	9300	9500-11000	18000	20	1.3	9	7

• Protected under U.S. Patent 6,943,646

† LFCN-1700+, -2250+, -6000+, -6700+ Loss < 1.2dB, LFCN-800+, -900+, -1325+ Loss < 1.3dB, LFCN-2000+, -2400+ Loss < 1.5dB.

* Passband rating, at 100°C ambient derate linearly to 3.5W, 3W for LFCN-5000+, -6000+, -6700+, 4W for LFCN-800+, -1325+, -2000+, -2400+.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For quick access to product information see MINI-CIRCUITS CATALOG & WEB SITE

RF/IF MICROWAVE COMPONENTS

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Development Tools](#) category:

Click to view products by [Mini-Circuits](#) manufacturer:

Other Similar products are found below :

[MAAM-011117](#) [MAAP-015036-DIEEV2](#) [EV1HMC1113LP5](#) [EV1HMC6146BLC5A](#) [EV1HMC637ALP5](#) [122410-HMC686LP4E](#) [ADL5363-EVALZ](#) [130437-HMC1010LP4E](#) [EKIT01-HMC1197LP7F](#) [SKYA21001-EVB](#) [SMP1331-085-EVB](#) [EVAL01-HMC1041LC4](#) [MAAL-011111-000SMB](#) [MAAM-009633-001SMB](#) [107712-HMC369LP3](#) [107780-HMC322ALP4](#) [SP000416870](#) [EV1HMC520ALC4](#) [EV1HMC244AG16](#) [EV1HMC539ALP3](#) [124694-HMC742ALP5](#) [SC20ASATEA-8GB-STD](#) [MAX2692EVKIT#](#) [SKY12343-364LF-EVB](#) [108703-HMC452QS16G](#) [119197-HMC658LP2](#) [EV1HMC647ALP6](#) [ADL5725-EVALZ](#) [106815-HMC441LM1](#) [UXN14M9PE](#) [SIMSA868-DKL](#) [SIMSA868C-DKL](#) [SKY65806-636EK1](#) [SKY68020-11EK1](#) [SKY67159-396EK1](#) [SKY66181-11-EK1](#) [SKY65804-696EK1](#) [SKY13396-397LF-EVB](#) [SKY13380-350LF-EVB](#) [SKY13355-374LF-EVB](#) [SKY13322-375LF-EVB](#) [SKY12207-478LF-EVB](#) [SE5023L-EK1](#) [SE5004L-EK1](#) [SE2436L-EK1](#) [Se2435L-EK1](#) [CLA4609-086-EVB](#) [SIMSA915C-DKL](#) [SIMSA915-DKL](#) [SIMSA433C-DKL](#)