

DIMENSIONS	
A	B



2	2.50	2	2.50
3	3.50	3	3.50
4	4.50	4	4.50
5	5.50	5	5.50
6	6.50	6	6.50
7	7.50	7	7.50
8	8.50	8	8.50
9	9.50	9	9.50
10	10.50	10	10.50
11	11.50	11	11.50
12	12.50	12	12.50
13	13.50	13	13.50
14	14.50	14	14.50
15	15.50	15	15.50
16	16.50	16	16.50
17	17.50	17	17.50
18	18.50	18	18.50
19	19.50	19	19.50
20	20.50	20	20.50
21	21.50	21	21.50
22	22.50	22	22.50
23	23.50	23	23.50
24	24.50	24	24.50
25	25.50	25	25.50
26	26.50	26	26.50
27	27.50	27	27.50
28	28.50	28	28.50
29	29.50	29	29.50
30	30.50	30	30.50
31	31.50	31	31.50
32	32.50	32	32.50
33	33.50	33	33.50
34	34.50	34	34.50
35	35.50	35	35.50
36	36.50	36	36.50
37	37.50	37	37.50
38	38.50	38	38.50
39	39.50	39	39.50
40	40.50	40	40.50

SPECIFICATIONS 规格:


CURRENT RATING 电流额定值: 1 AMP
 INSULATOR RESISTANCE 绝缘电阻值: 1000 MEGOHMS MIN.
 DIELECTRIC WITHSTANDING 耐电压: AC 300 V
 CONTACT RESISTANCE 接触电阻值: 40mΩ Max.
 OPERATING TEMPERATURE 工作温度: -40°C TO +105°C
 CONTACT MATERIAL 端子物料: PHOSPHOR BRONZE
 INSULATOR MATERIAL 绝缘体物料:
 STANDARD 标准物料: POLYESTER 聚酯, LCP, UL 94-V0
 SOLDERING PROCESS 可焊性:
 LCP (STANDARD 标准物料) -
 IR REFLOW 回流焊: 260°C for 10 sec.
 WAVE SOLDER 人工焊接: 350°C for 3-5 sec
 MANUAL SOLDER 人工焊接: 250°C for 5-10 sec

MATES WITH 配套之母座 (SUBJECT TO PIN LENGTH 在端子长度适合的条件下):
 BC020 BC025 BC030 BC032 BC034
 SA SA SA SA

REV	A	DATE	20/05/08
DETAIL	RELEASE	AMENDMENT TO PLATING OPTIONS AND SPEC	21/12/09
By	ASE	ADDITIONAL DIMENSION	23/07/10
		PCN:BC065-001	18/03/11

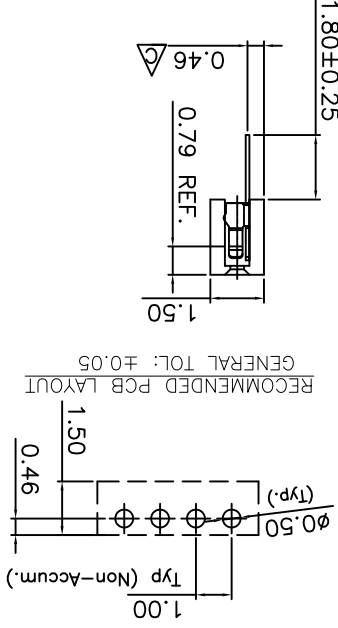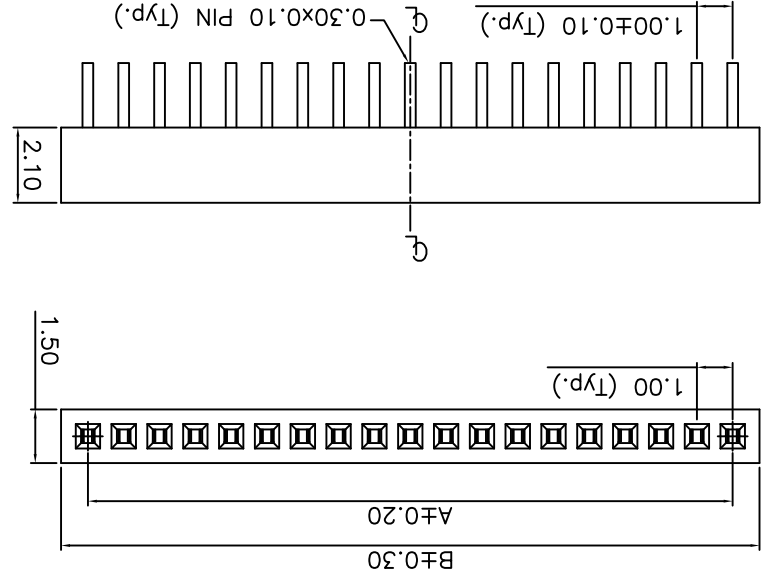

RECOMMENDED PCB LAYOUT
 GENERAL TOL: ±0.05

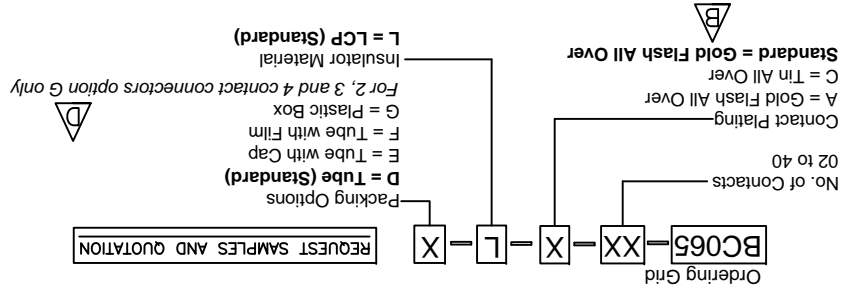

Tolerances	Dimensions in mm
(Except as noted)	
X ± 0.30	X °± 5°
X ± 0.25	X °± 3°
X ± 0.15	X °± 2°
X ± 0.10	X °± 1°

Part Number:-	BC065
Date:-	20 MAY 08
Description:-	1.00mm PITCH SOCKET, SINGLE ROW, THROUGH HOLE, VERTICAL



Scale	NTS
Revision	D
Material	See Note
Drawn by	ASE
E & OE	1/1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [FFC & FPC Connectors](#) category:

Click to view products by [GCT manufacturer](#):

Other Similar products are found below :

[HFW11R-1STE1H1LF](#) [FH29B-100S-0.2SHW\(99\)](#) [FA5S008HP1](#) [FH29B-120S-0.2SHW\(99\)](#) [FH29B-80S-0.2SHW\(99\)](#) [FHS-16](#) [FPH-2022G](#)
[52610-1075](#) [52610-1275](#) [52610-1934](#) [XF3M\(1\)-1415-1B-R100](#) [501864-3091-TR225](#) [0525594033](#) [086210010340800](#) [086222026001800](#)
[52271-2869-CUT-TAPE](#) [62674-201121DLF](#) [62684-36210E9ALF](#) [52610-1675](#) [52746-1671-TR250](#) [10051922-2810EHLF](#) [6-520415-9](#)
[BD021-09A-A1-0350-0200-0550-LD](#) [SFV6R-1STE9HLF](#) [XF3M-2915-1B-R100](#) [1658549-1](#) [62674-221121ALF](#) [46214008010800](#)
[046298003000883](#) [151660622](#) [842-816-2630-035](#) [AYF530665TA](#) [AYF351525](#) [046296011930846+](#) [AYF352325A](#) [046254020000800+](#)
[FH19C-13S-0.5SH\(99\)](#) [FH39J-51S-0.3SHW\(99\)](#) [AYF355125A](#) [AYF530365TA](#) [FH29B-44S-0.2SHW\(99\)](#) [SFW5R-2STAE9LF](#) [AYF351125A](#)
[AYF350725A](#) [62684-502100AHLF](#) [FH39-61S-0.3SHW\(99\)](#) [AYF414035A](#) [10064555-172520HLF](#) [AYF212335A](#) [504754-2500](#)